

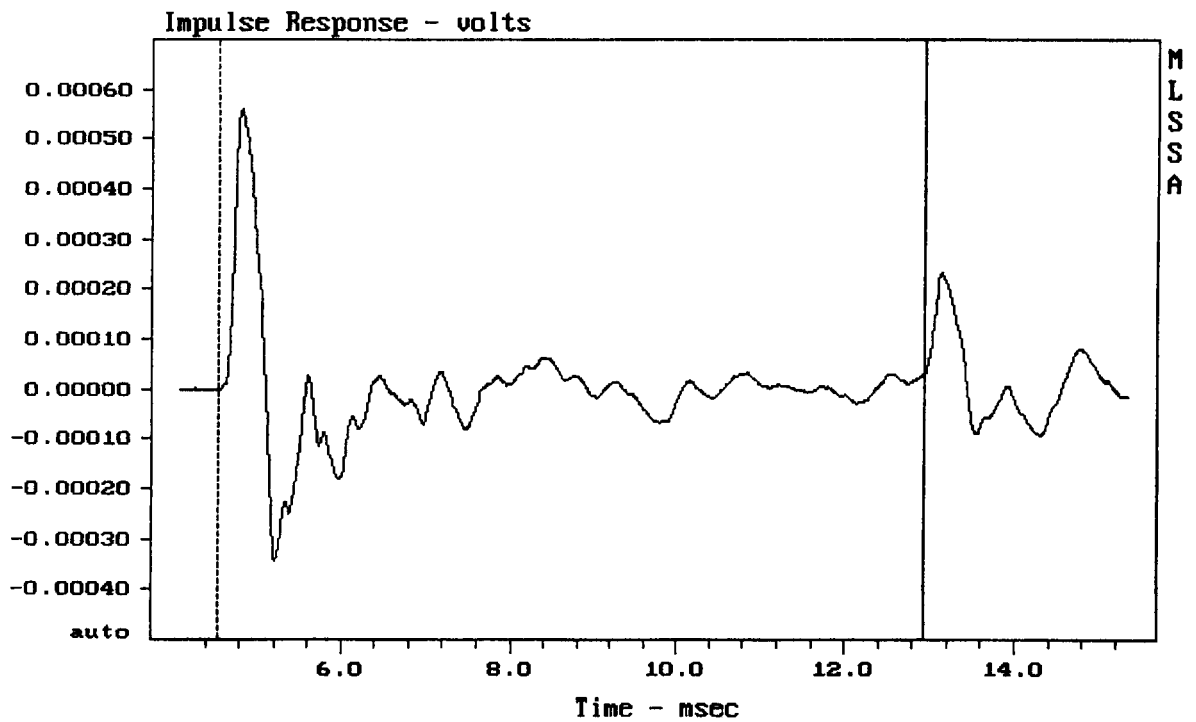

---

Level (100:1498 Hz) = 95.48 dB SPL/watt (8 ohms, @1.50 meters)

---

15TBX40

MLSSA: Frequency Domain




---

CURSOR: y = 3.10076e-005 x = 12.9250 (1175)

---

15TBX40

MLSSA SPO 4.0D #960903-3057-3075

QC Limits

Measured Data

Line	Parameter	Value	Units
1	RMSE-free	0.74	Ohms
2	Fs	38.90	Hz
3	Re	5.26	Ohms[dc]
4	Res	123.55	Ohms
5	Qms	7.82	
6	Qes	0.33	
7	Qts	0.32	
8	L1	1.04	mH
9	L2	1.90	mH
10	R2	13.55	Ohms
11	RMSE-load	0.78	Ohms
12	Vas(Sd)	103.55	liters
13	Mms	166.13	grams
14	Cms	101	$\mu\text{M}/\text{Newton}$
15	B1	25.33	Tesla-M
16	SPLref(Sd)	94.5	dB[Re]
17	Rub-index	0.02	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm

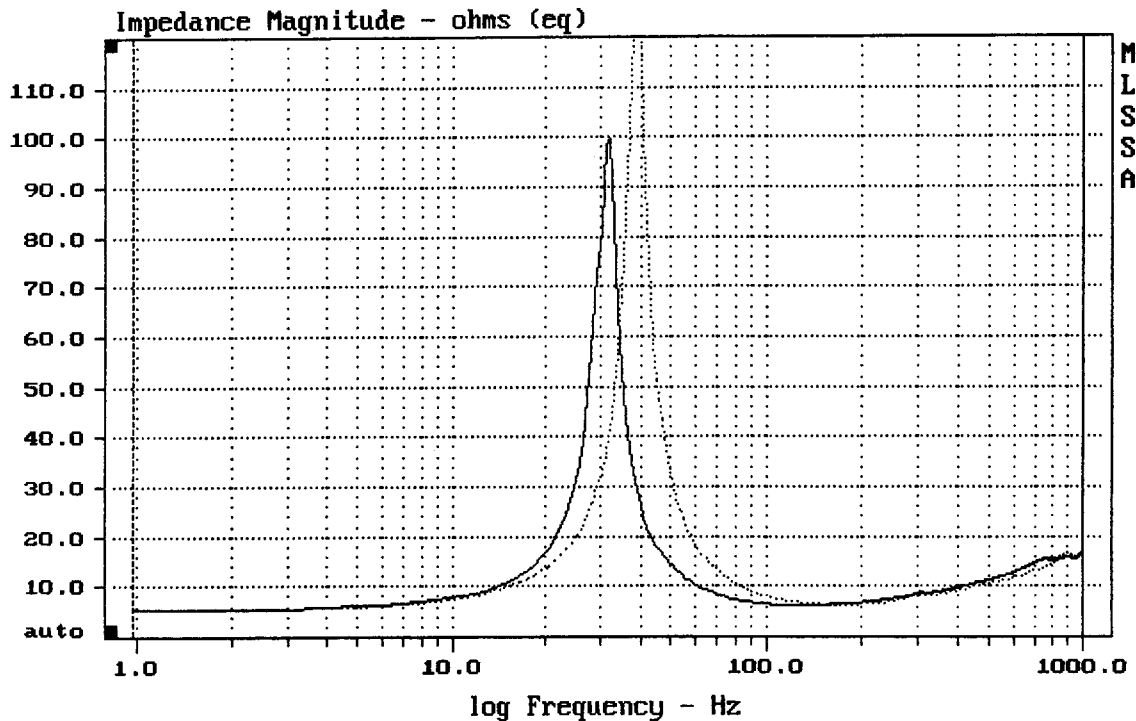
DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -19.2% (-20% to -50% is recommended).

15TBX40 2003

MLSSA: Parameters



CURSOR: dy = 0.20505 x = 1000.9766 (1025)

DTTO

MLSSA: Frequency Domain