


Level (67:2708 Hz) = 95.21 dB SPL/watt (4 ohms, @1.50 meters)

15W2A ONIX

MLSSA: Frequency Domain

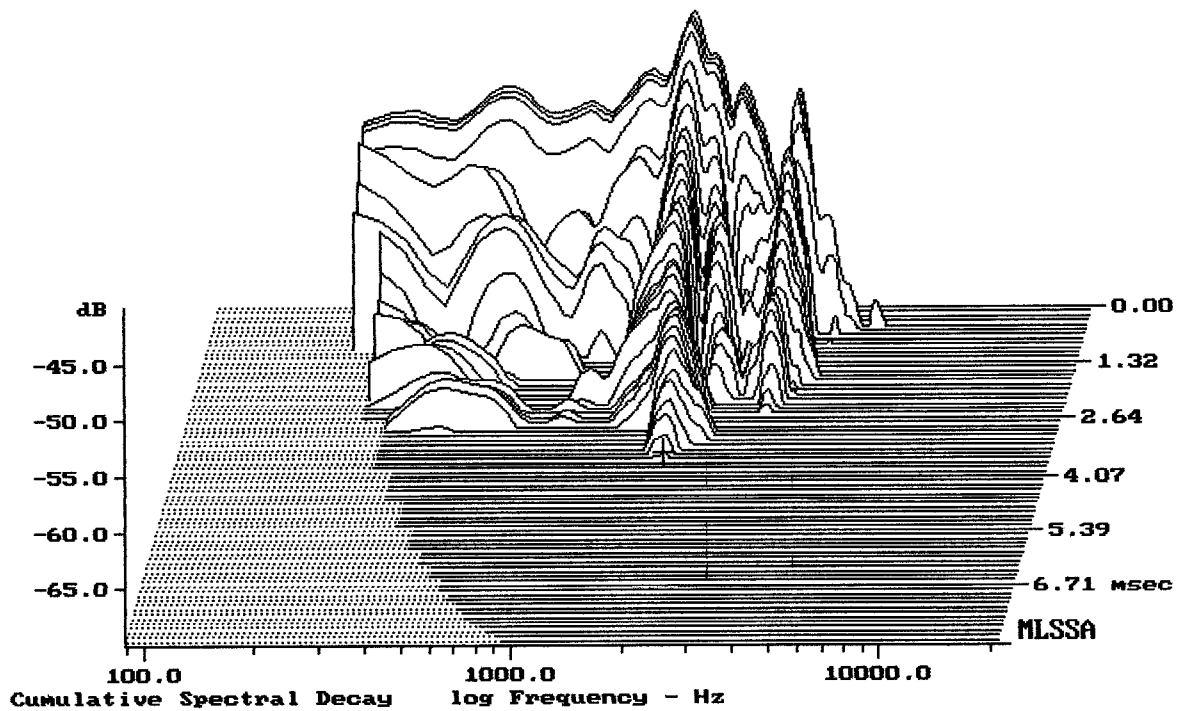

-69.47 dB, 1864 Hz (42), 3.630 msec (34)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.34	Ohms
2	Fs	42.06	Hz
3	Re	3.20	Ohms[dc]
4	Res	51.04	Ohms
5	Qms	15.22	
6	Qes	0.95	
7	Qts	0.90	
8	L1	0.45	mH
9	L2	0.70	mH
10	R2	3.72	Ohms
11	RMSE-load	0.26	Ohms
12	Vas(Sd)	152.50	liters
13	Mms	90.74	grams
14	Cms	158	$\mu\text{M}/\text{Newton}$
15	Bl	8.97	Tesla-M
16	SPLref(Sd)	92.6	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 829.58 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -25.8% (-20% to -50% is recommended).

15W2A ONIX

MLSSA: Parameters

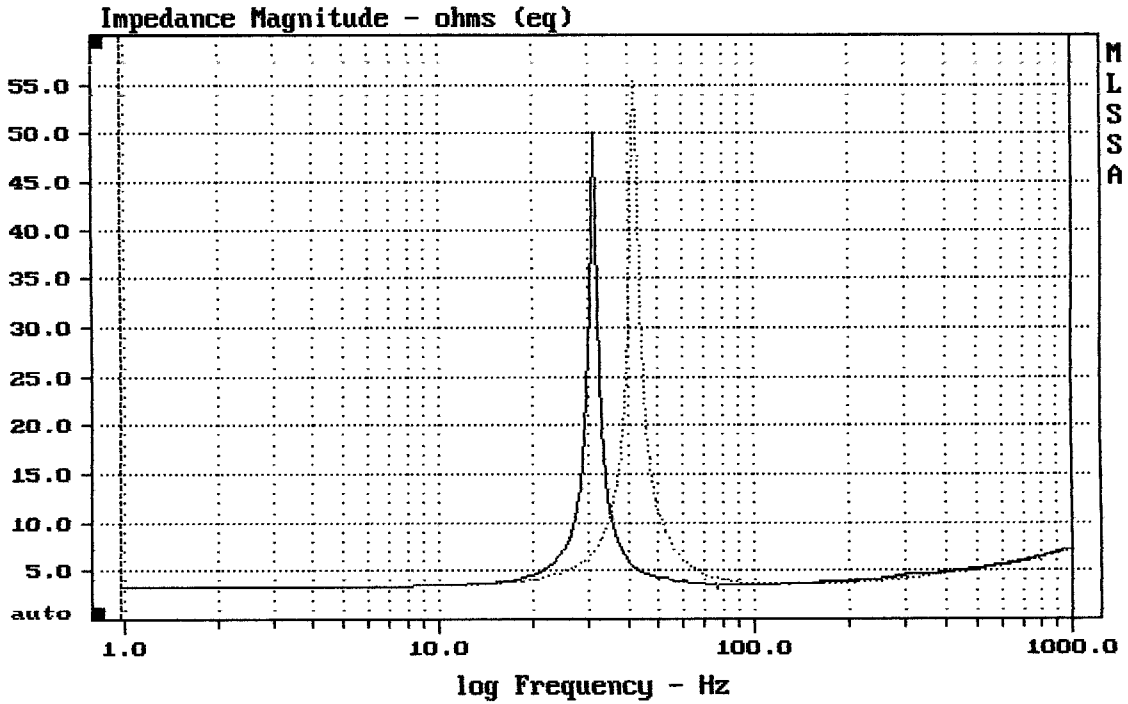

mean: 5.578, rms: 6.359, std: 3.053, max: 55.32, min: 3.246

MLSSA: Frequency Domain