


Level (67:3607 Hz) = 95.46 dB SPL/watt (4 ohms, @1.50 meters)

SELENIUM 15W2A PRATA 4ohm

MLSSA: Frequency Domain

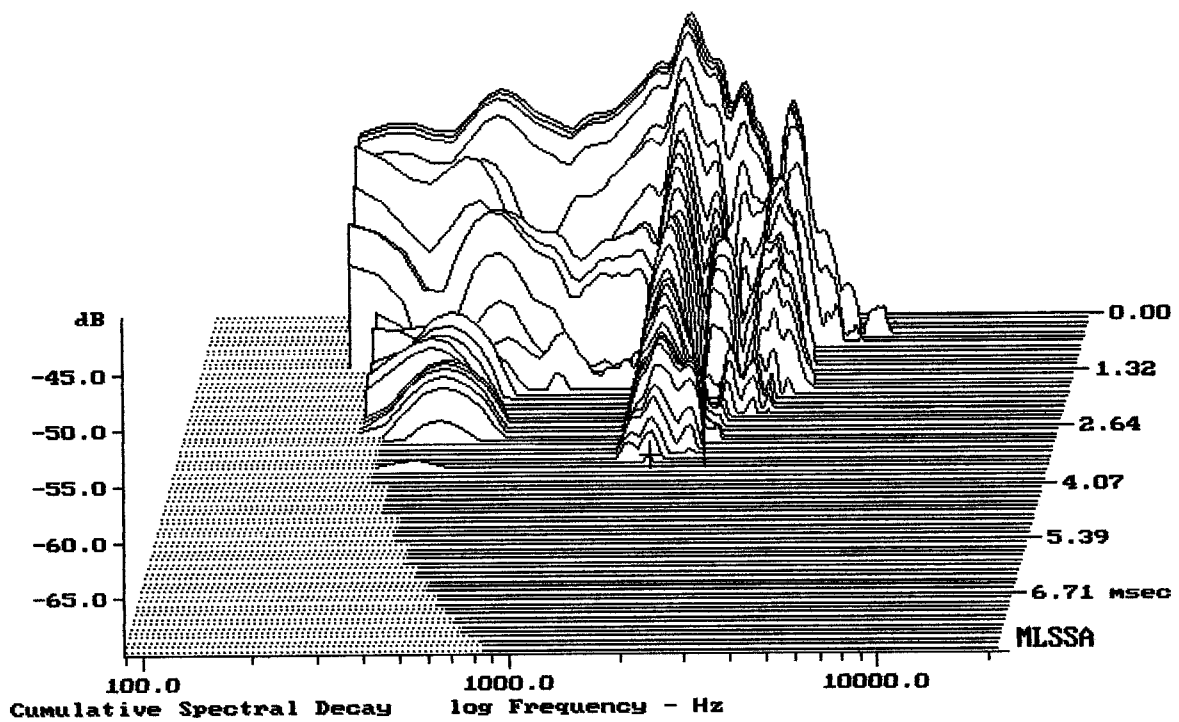

-69.28 dB, 1731 Hz (39), 3.520 msec (33)

Line	Parameter	Value	Units
1	RMSE-free	0.27	Ohms
2	Fs	38.37	Hz
3	Re	3.10	Ohms[dc]
4	Res	50.67	Ohms
5	Qms	13.29	
6	Qes	0.81	
7	Qts	0.77	
8	L1	0.48	mH
9	L2	0.70	mH
10	R2	3.58	Ohms
11	RMSE-load	0.21	Ohms
12	Vas(Sd)	174.43	liters
13	Mms	95.33	grams
14	Cms	180	$\mu\text{M}/\text{Newton}$
15	B1	9.36	Tesla-M
16	SPLref(Sd)	92.7	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 829.58 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -25.3% (-20% to -50% is recommended).

15W2A PRATA 4ohm

MLSSA: Parameters

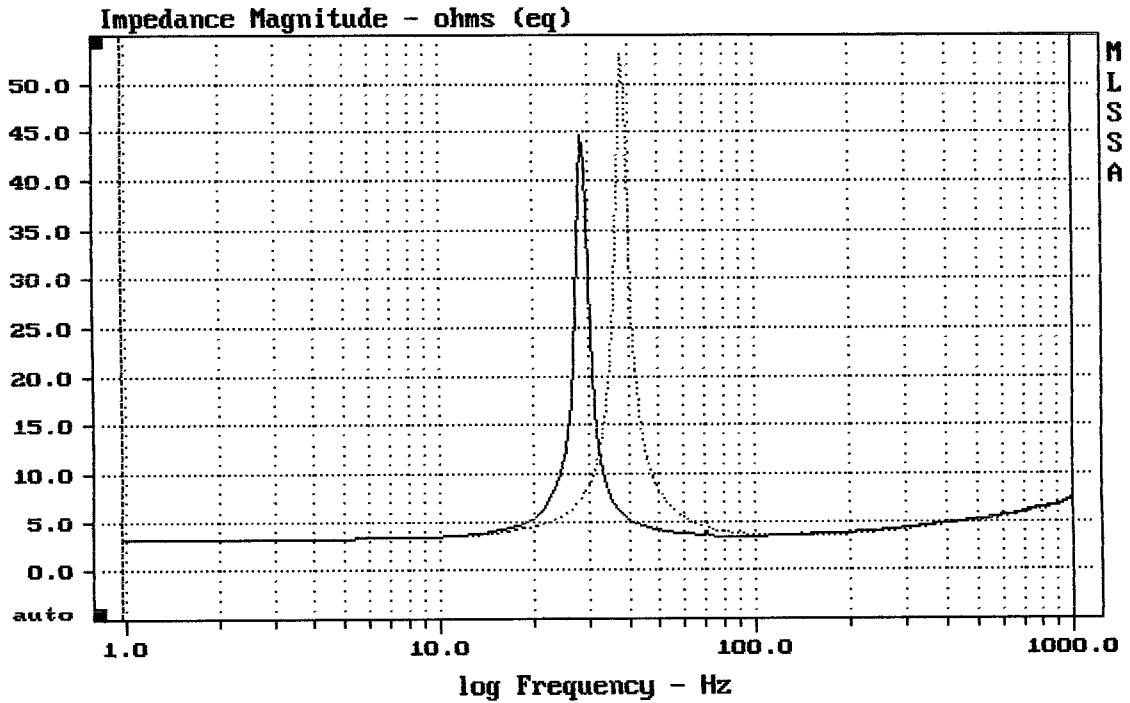

mean: 5.535, rms: 6.34, std: 3.091, max: 53.08, min: 3.189

MLSSA: Frequency Domain