

MLSSA SPO 4.0D #960903-3057-3075

Line	Parameter	Value	Units	QC Limits
1	RMSE-free	0.80	Ohms	
2	Fs	48.34	Hz	
3	Re	5.24	Ohms[dc]	
4	Res	142.27	Ohms	
5	Qms	11.68		
6	Qes	0.43		
7	Qts	0.42		
8	L1	1.13	mH	
9	L2	1.89	mH	
10	R2	7.49	Ohms	
11	RMSE-load	0.67	Ohms	
12	Vas(Sd)	126.86	liters	
13	Mms	154.35	grams	
14	Cms	70	$\mu\text{M}/\text{Newton}$	
15	B1	23.89	Tesla-M	
16	SPLref(Sd)	97.1	dB[Re]	
17	Rub-index	0.01		

Method: Mass-loaded (80.00 grams)

Area (Sd): 1134.11 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -19.3% (-20% to -50% is recommended).

18PWB46


MLSSA: Parameters

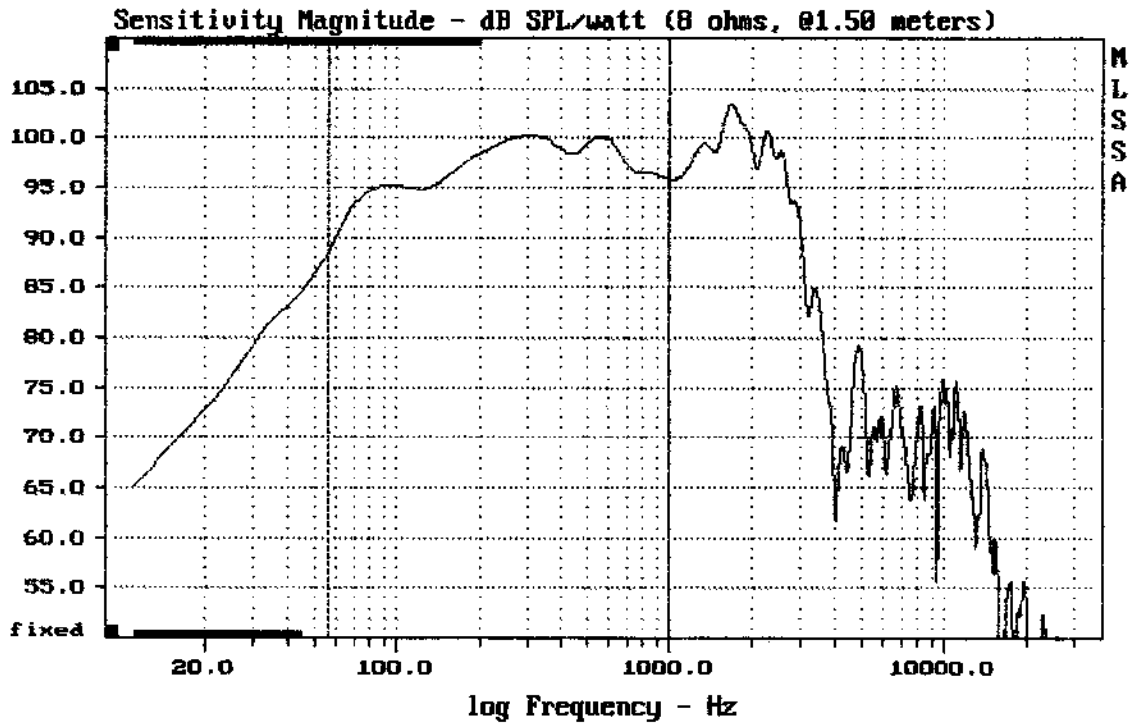

Level (55.999 Hz) = 97.54 dB SPL/watt (8 ohms, @1.50 meters)

B&C 18PWB46

MLSSA: Frequency Domain

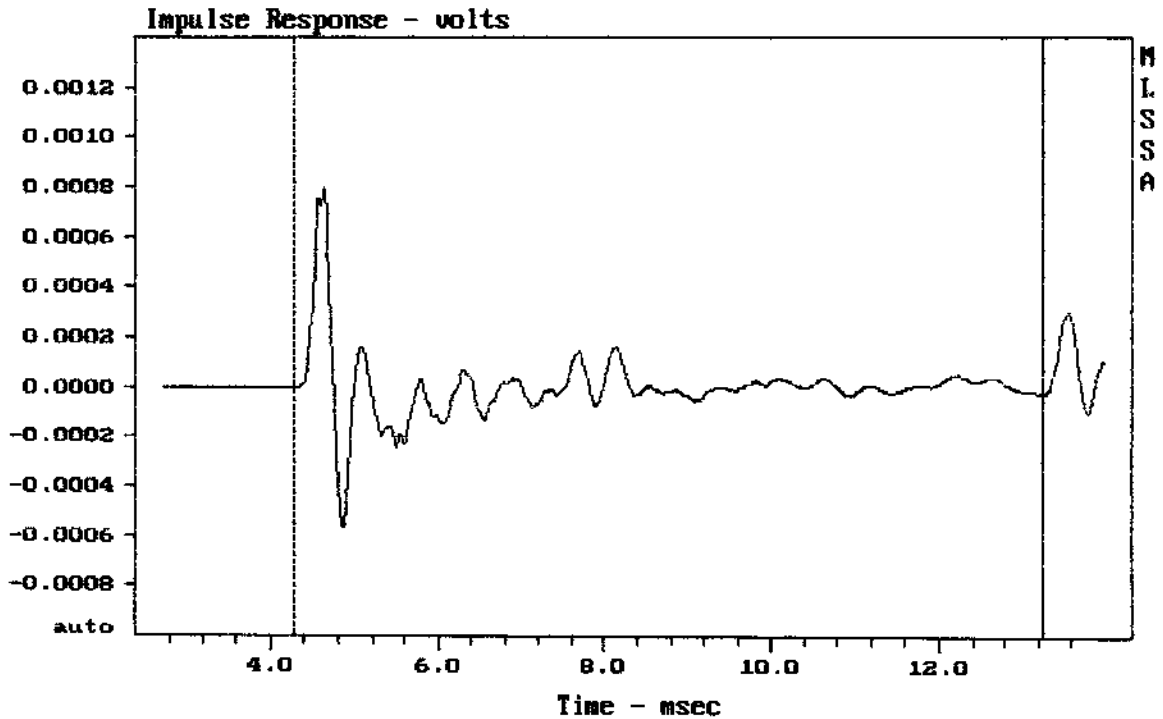

CURSOR: $y = -2.53761e-005$ $x = 13.2440$ (1204)

B&C 18PWB46