


Level (55:4506 Hz) = 98.04 dB SPL/watt (8 ohms, @1.50 meters)

MLSSA: Frequency Domain

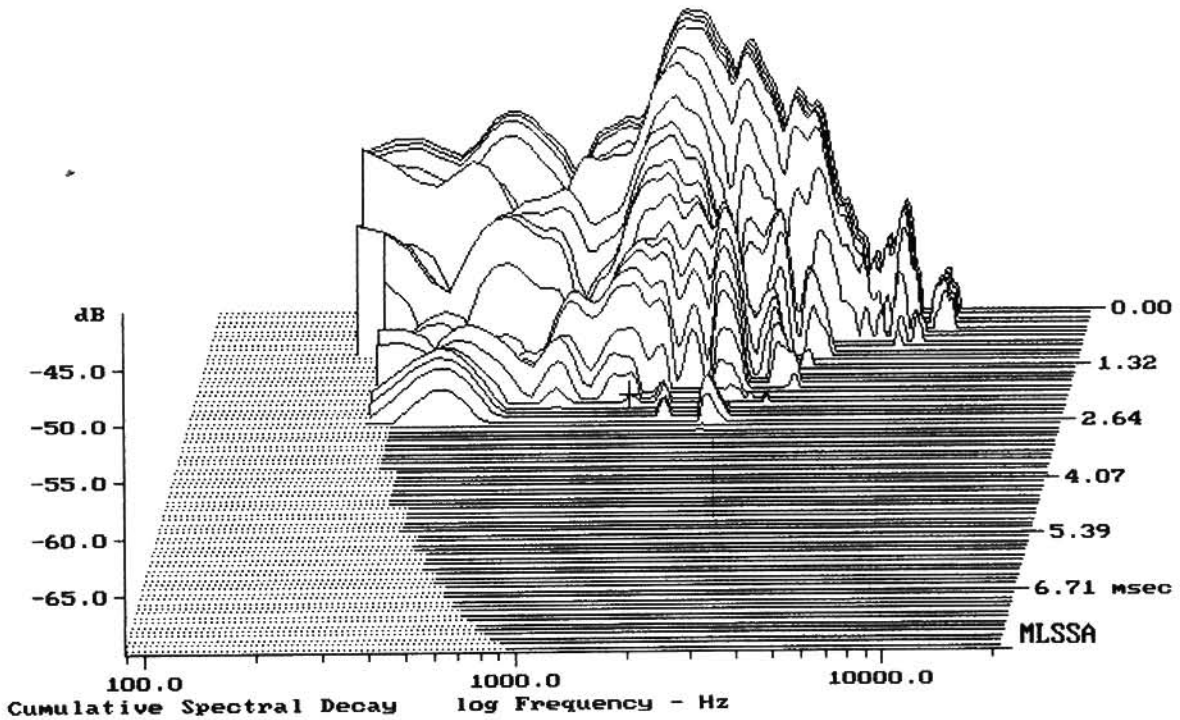

-69.30 dB, 1332 Hz (30), 2.200 msec (21)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.45	Ohms
2	Fs	30.92	Hz
3	Re	6.93	Ohms[dc]
4	Res	51.35	Ohms
5	Qms	5.44	
6	Qes	0.73	
7	Qts	0.65	
8	L1	0.21	mH
9	L2	1.61	mH
10	R2	4.71	Ohms
11	RMSE-load	0.66	Ohms
12	Vas(Sd)	432.78	liters
13	Mms	62.90	grams
14	Cms	421	$\mu\text{M}/\text{Newton}$
15	B1	10.74	Tesla-M
16	SPLref(Sd)	94.2	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -30.1% (-20% to -50% is recommended).

ACR 38H156SCF TIPA

MLSSA: Parameters

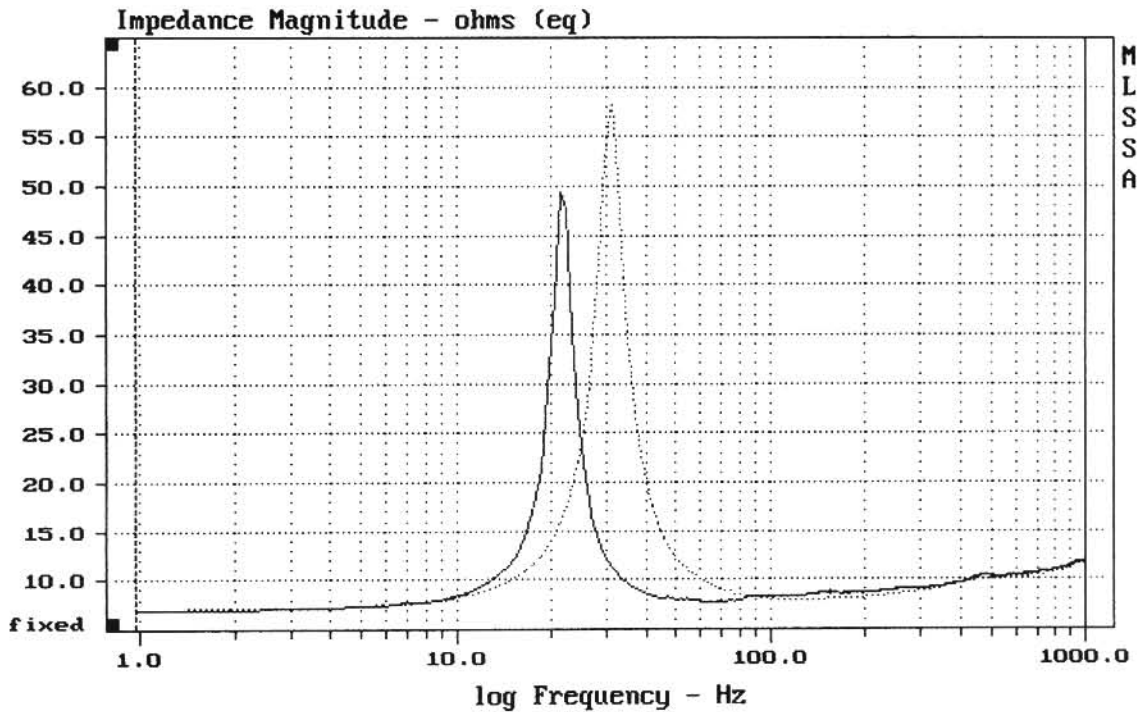

mean: 10.39, rms: 11.12, std: 3.976, max: 58.09, min: 6.988

MLSSA: Frequency Domain