


Level (100:3507 Hz) = 95.47 dB SPL/watt (4 ohms, @1.00 meters)

12NW76-4

MLSSA: Frequency Domain

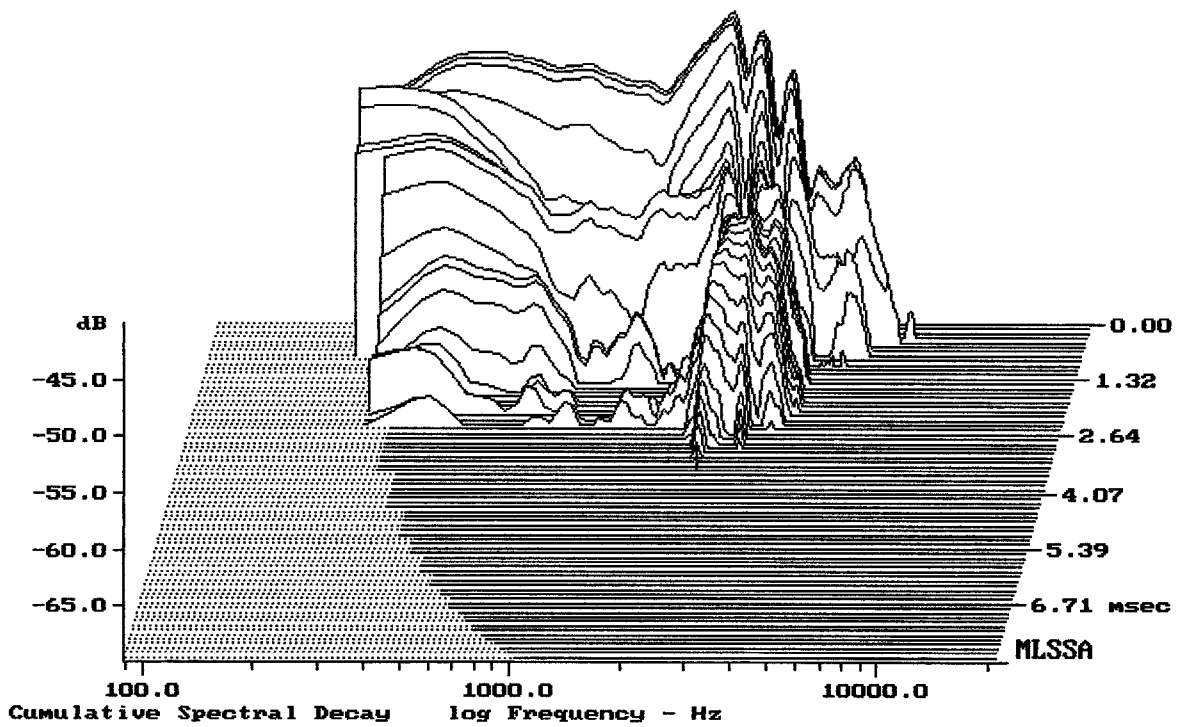

-69.70 dB, 2264 Hz (51), 3.300 msec (31)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.87	Ohms
2	Fs	53.61	Hz
3	Re	3.37	Ohms[dc]
4	Res	62.59	Ohms
5	Qms	3.52	
6	Qes	0.19	
7	Qts	0.18	
8	L1	0.73	mH
9	L2	1.06	mH
10	R2	3.20	Ohms
11	RMSE-load	0.63	Ohms
12	Vas(Sd)	54.17	liters
13	Mms	64.42	grams
14	Cms	137	$\mu\text{M}/\text{Newton}$
15	Bl	19.66	Tesla-M
16	SPLref(Sd)	98.3	dB[Re]
17	Rub-index	0.24	

Method: Mass-loaded (40.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -21.0% (-20% to -50% is recommended).

12NW76-4

MLSSA: Parameters

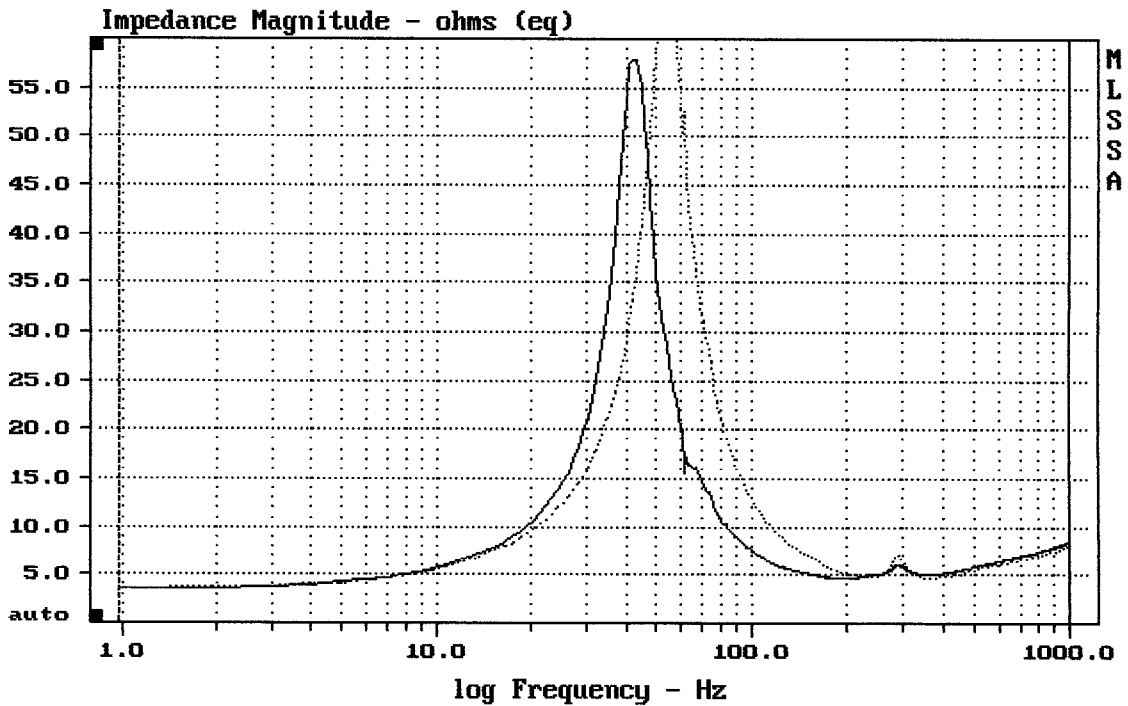

mean: 8.181, rms: 11.4, std: 7.946, max: 64.93, min: 3.506

MLSSA: Frequency Domain