


Level (100:1998 Hz) = 100.15 dB SPL/watt (8 ohms, @1.50 meters)

B&C 15/138-B FROM YORKVILLE EF500P OPR.15PW40

MLSSA: Frequency Domain

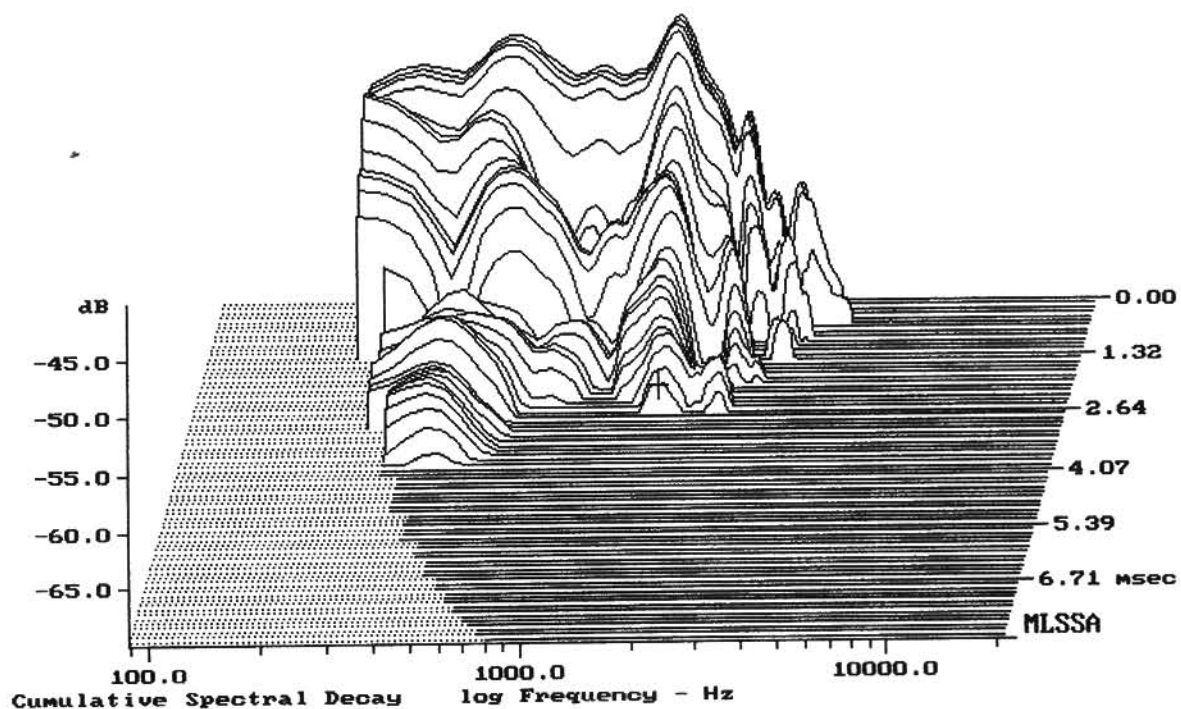

-67.64 dB, 1598 Hz (36), 2.640 msec (25)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.78	Ohms
2	Fs	49.29	Hz
3	Re	5.14	Ohms[dc]
4	Res	143.15	Ohms
5	Qms	7.07	
6	Qes	0.25	
7	Qts	0.25	
8	L1	1.06	mH
9	L2	1.97	mH
10	R2	7.51	Ohms
11	RMSE-load	1.07	Ohms
12	Vas(Sd)	115.31	liters
13	Mms	92.89	grams
14	Cms	112	$\mu\text{M}/\text{Newton}$
15	Bl	24.14	Tesla-M
16	SPLref(Sd)	99.2	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (140.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -36.7% (-20% to -50% is recommended).

B&C 15/138-8 FROM YORKVILLE EF500P OPR. 15PW40

MLSSA: Parameters

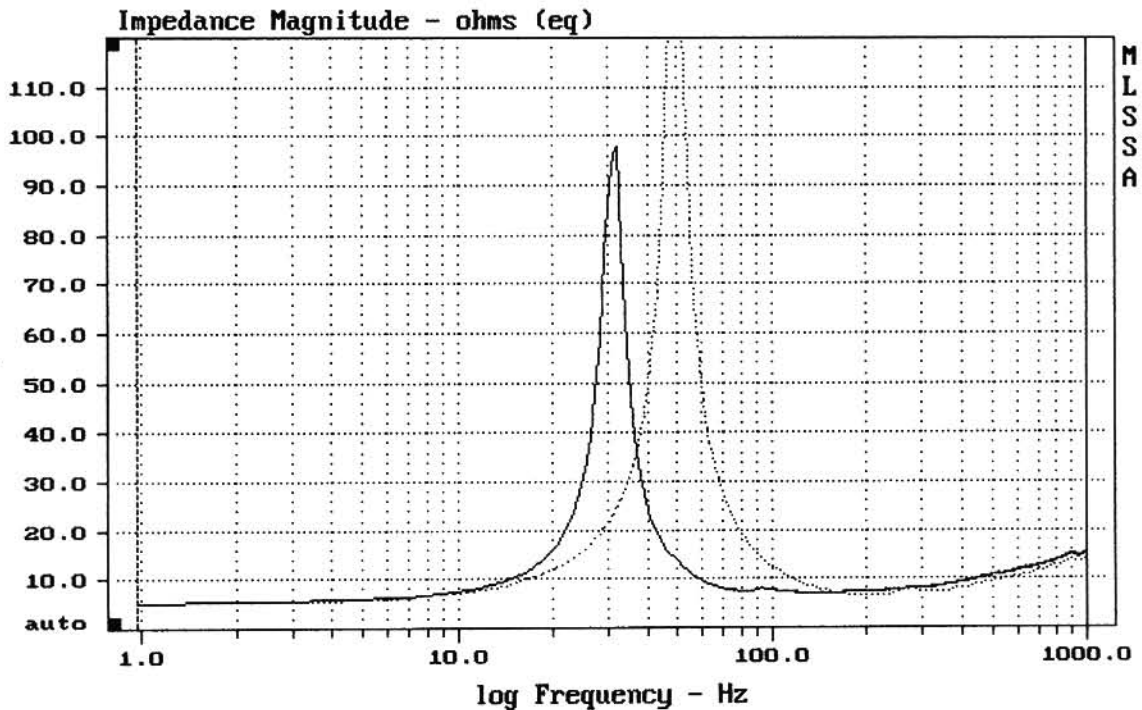

mean: 12.6, rms: 18.13, std: 13.03, max: 145.3, min: 5.226