


Level (100:2987 Hz) = 96.21 dB SPL/watt (4 ohms, @1.50 meters)

15PLB76/4

MLSSA: Frequency Domain

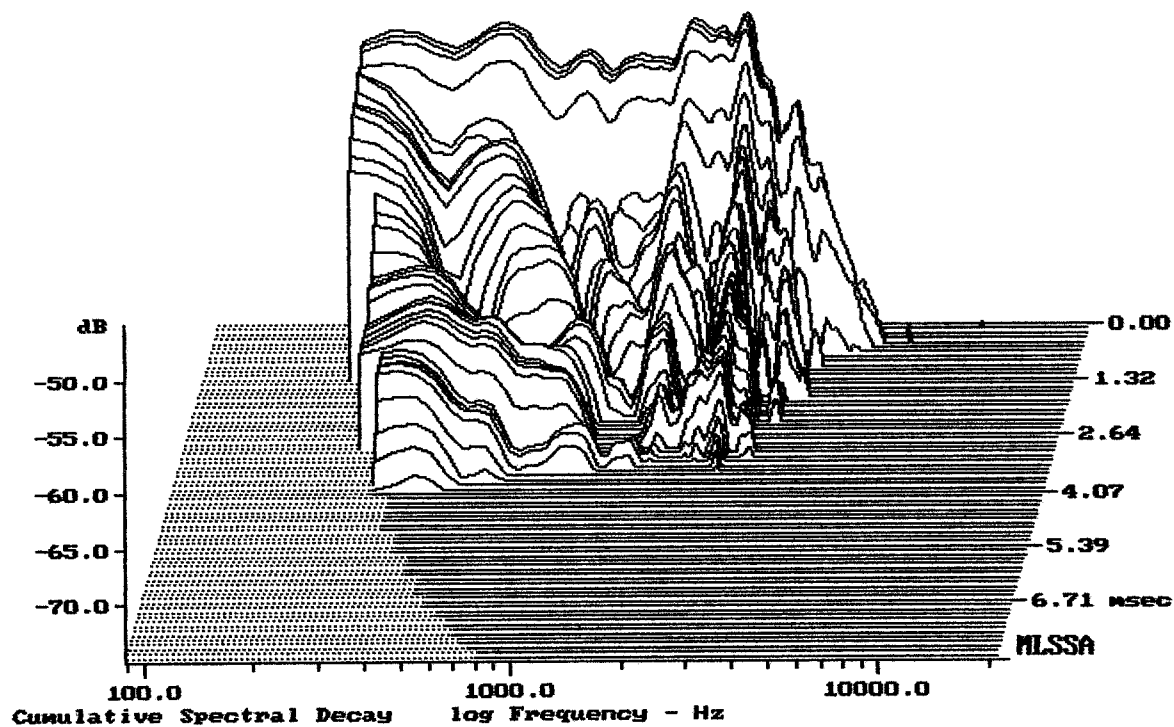

-73.87 dB, 2619 Hz (59), 3.418 msec (32)

DITO

Measured Data

Line	Parameter	Value	Units
1	RMSE-free	0.35	Ohms
2	Fs	44.11	Hz
3	Re	3.41	Ohms[dc]
4	Res	144.08	Ohms
5	Qms	11.89	
6	Qes	0.28	
7	Qts	0.27	
8	L1	0.76	mH
9	L2	1.21	mH
10	R2	4.56	Ohms
11	RMSE-load	0.31	Ohms
12	Vas(Sd)	145.39	liters
13	Mms	97.71	grams
14	Cms	133	$\mu\text{M}/\text{Newton}$
15	B1	18.11	Tesla-M
16	SPLref(Sd)	98.3	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 881.41 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -24.2% (-20% to -50% is recommended).

15PLB76/4

MLSSA: Parameters

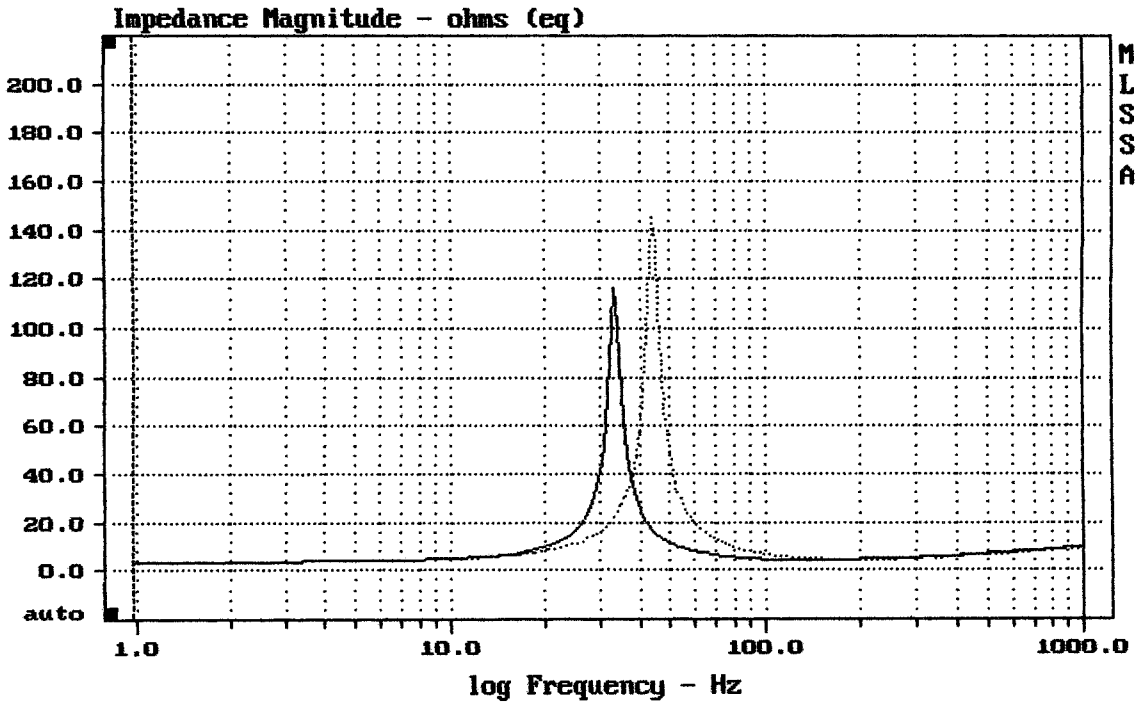

mean: 8.249, rms: 12.94, std: 9.97, max: 145.3, min: 3.545

MLSSA: Frequency Domain