

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.02	Ohms
2	Fs	42.00	Hz
3	Re	5.20	Ohms[dc]
4	Res	102.52	Ohms
5	Qms	6.19	
6	Qes	0.31	
7	Qts	0.30	
8	L1	0.30	mH
9	L2	1.59	mH
10	R2	10.78	Ohms
11	RMSE-load	0.93	Ohms
12	Vas(Sd)	221.07	liters
13	Mms	66.75	grams
14	Cms	215	$\mu\text{M}/\text{Newton}$
15	B1	17.07	Tesla-M
16	SPLref(Sd)	99.0	dB[Re]
17	Rub-index	0.01	

EBP: 140

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -32.0% (-20% to -50% is recommended).

15PH40


MLSSA: Parameters

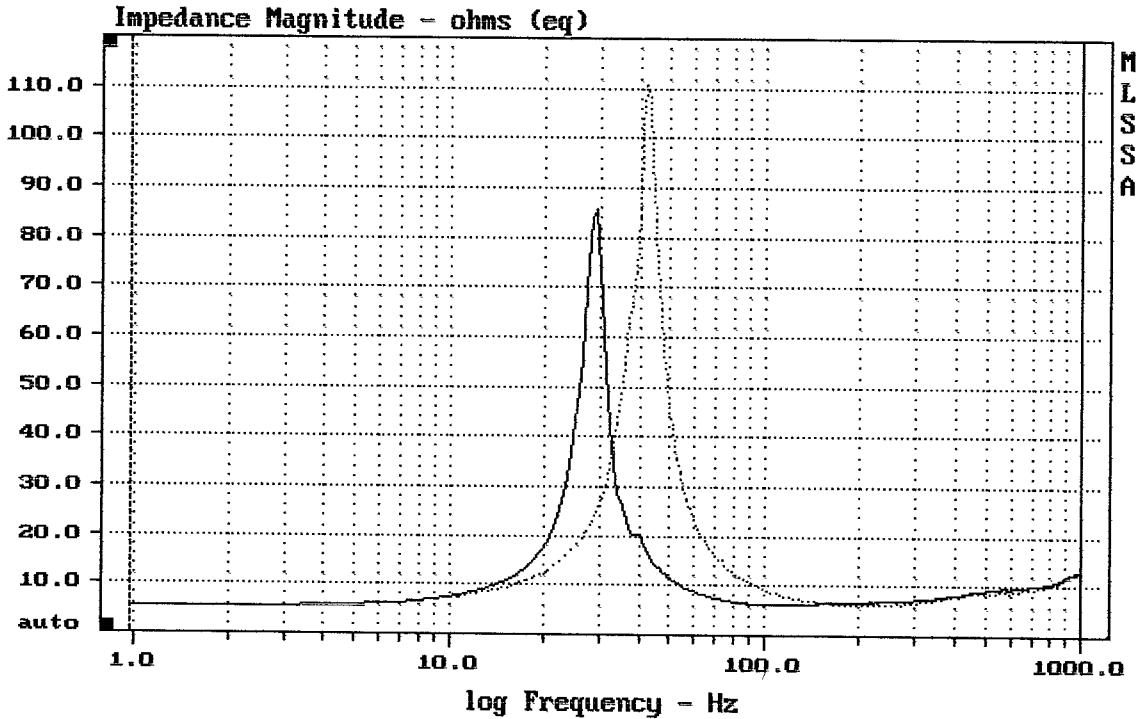

CURSOR: dy = -0.728428 x = 1000.9766 (1025)

DTTO

MLSSA: Frequency Domain

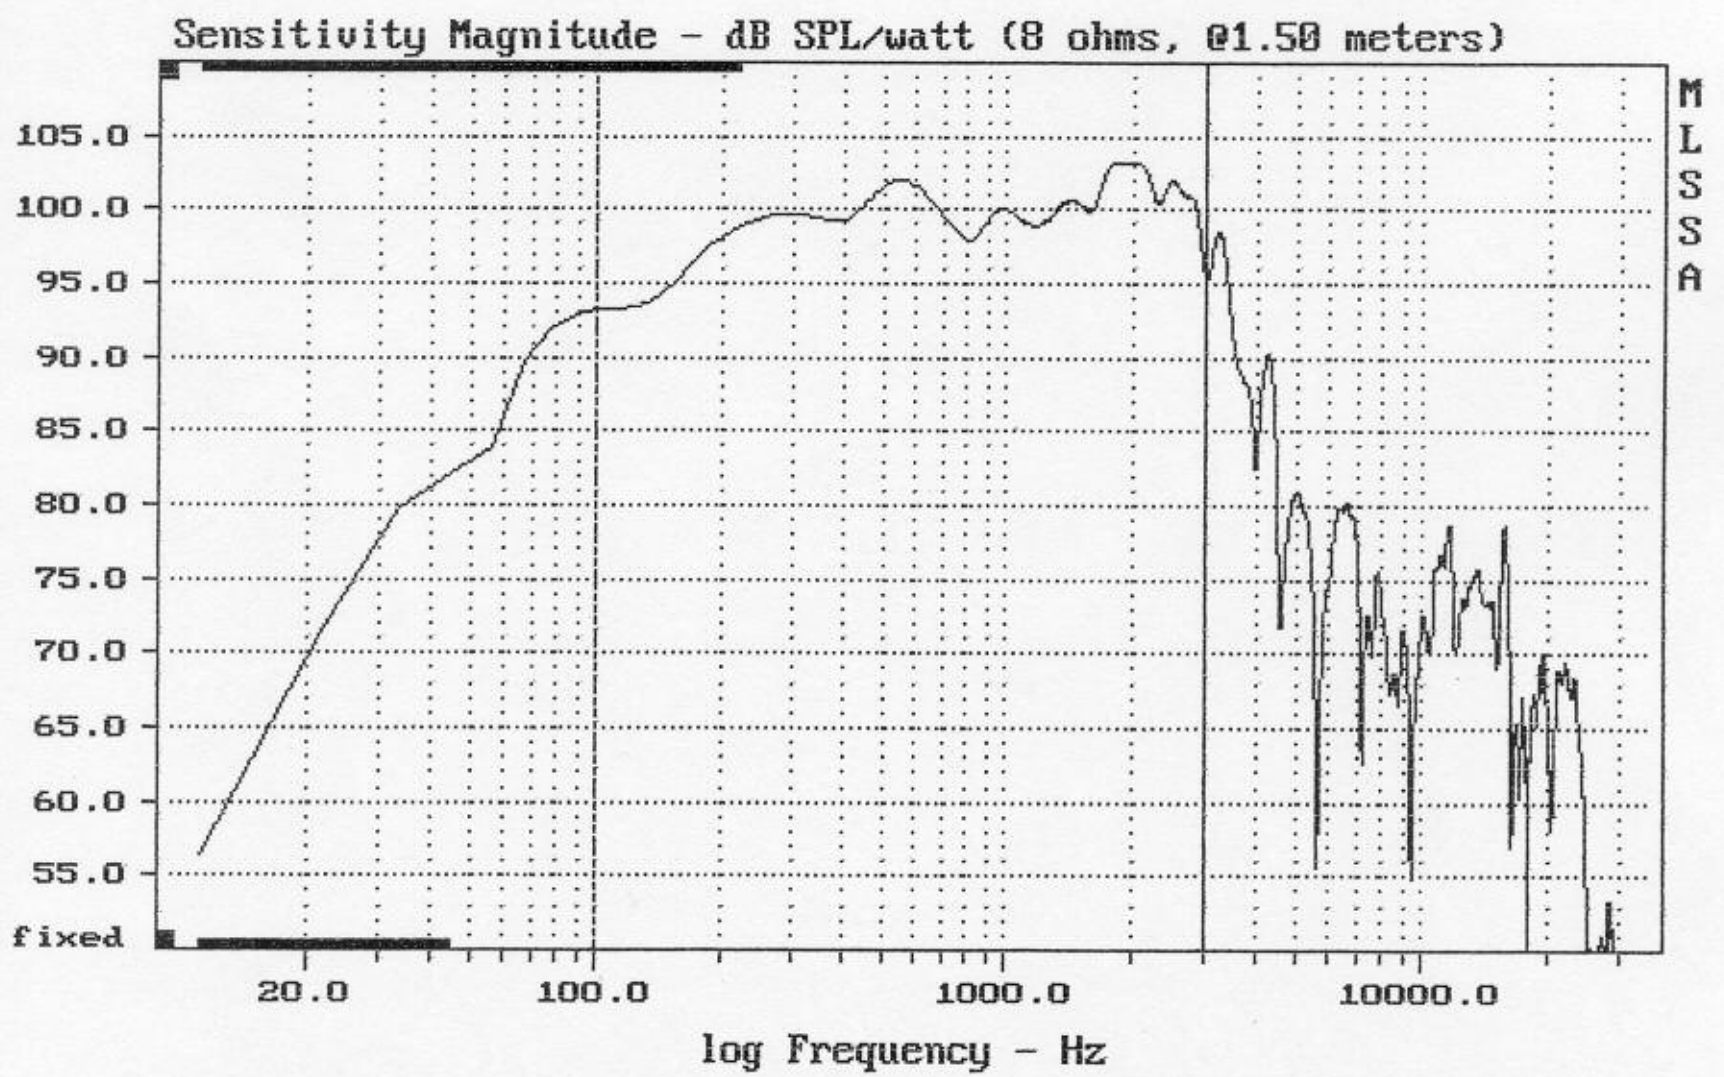

Level (100:2996 Hz) = 99.70 dB SPL/watt (8 ohms, @1.50 meters)

B&C 15PH40