

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.72	Ohms
2	Fs	31.53	Hz
3	Re	5.16	Ohms[dc]
4	Res	75.00	Ohms
5	Qms	7.10	
6	Qes	0.49	
7	Qts	0.46	
8	L1	1.35	mH
9	L2	1.71	mH
10	R2	6.92	Ohms
11	RMSE-load	0.70	Ohms
12	Vas(Sd)	268.30	liters
13	Mms	190.34	grams
14	Cms	134	$\mu\text{M}/\text{Newton}$
15	B1	19.95	Tesla-M
16	SPLref(Sd)	94.2	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (140.00 grams)

Area (Sd): 1194.59 sq cm


DCR mode: Measure (-0.09 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -23.7% (-20% to -50% is recommended).


18PS100

MLSSA: Parameters

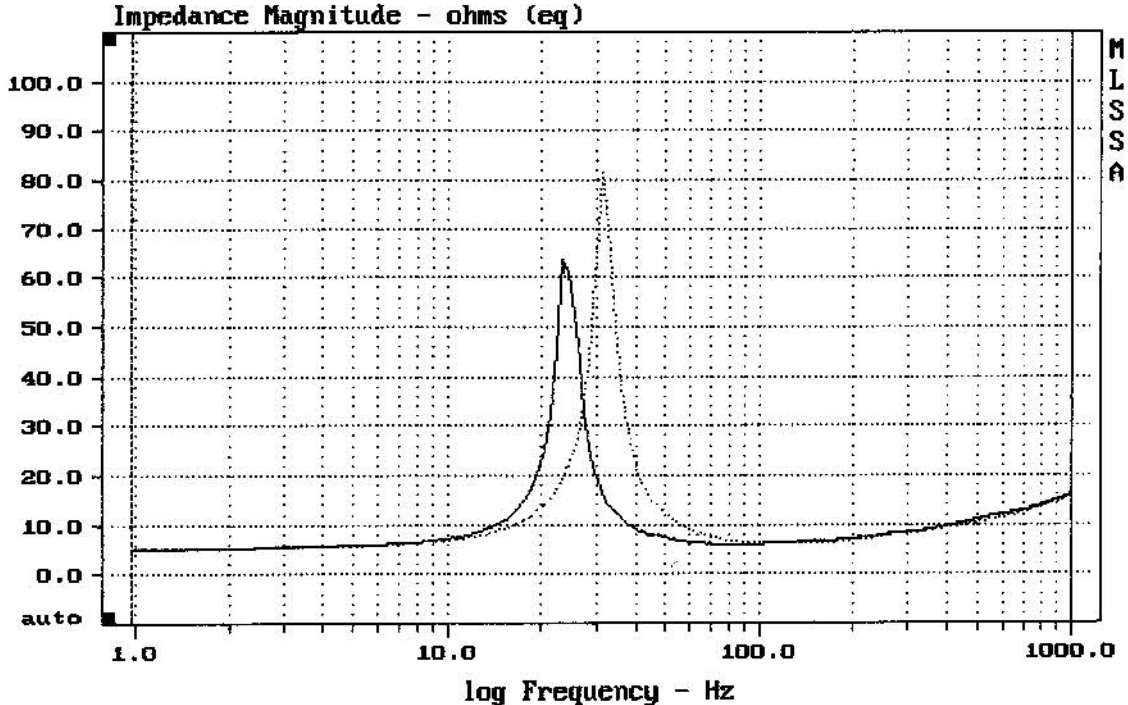

mean: 11.28, rms: 12.64, std: 5.696, max: 81.45, min: 5.274


MLSSA: Frequency Domain

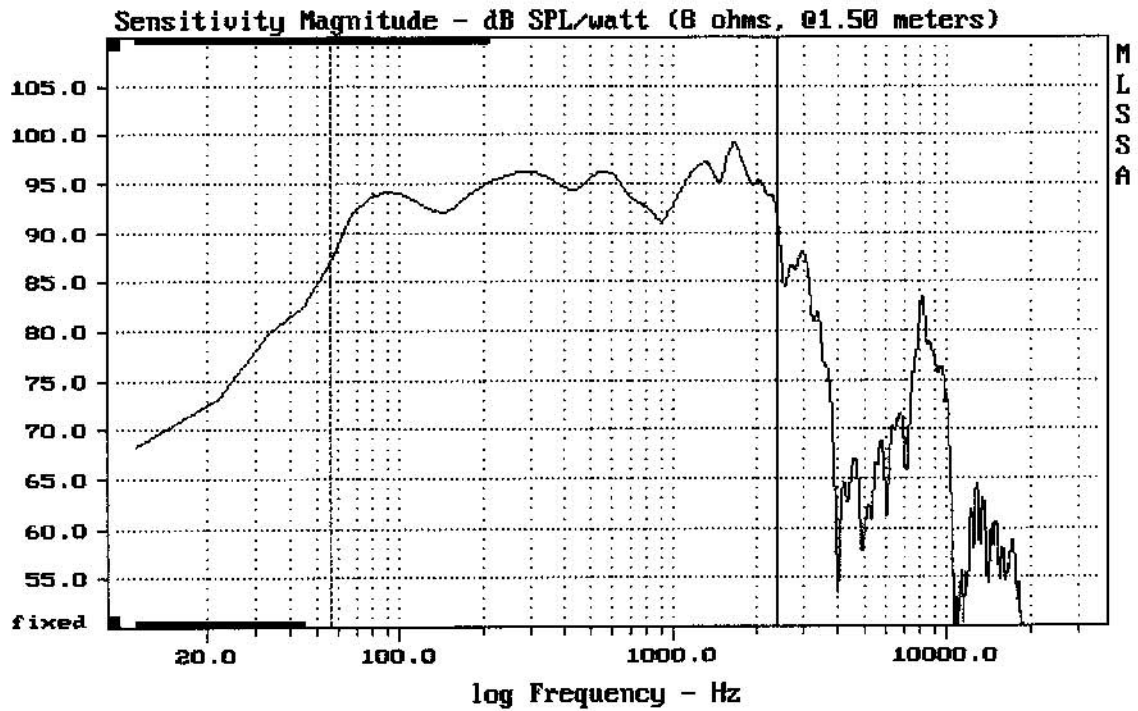

Level (55:2397 Hz) = 94.64 dB SPL/watt (8 ohms, @1.50 meters)

10PS100

MLSSA: Frequency Domain

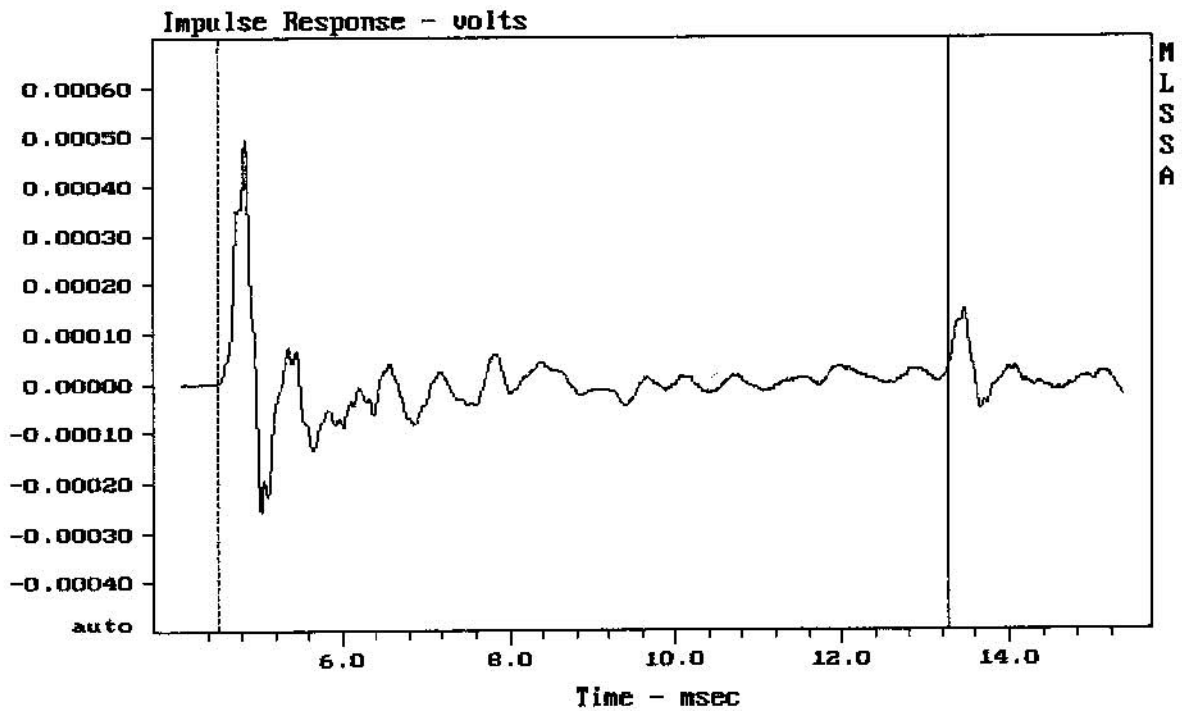

mean: -7.911e-007, rms: 7.358e-005, std: 7.358e-005, max: 0.0004952, min: -0.0

10PS100