

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.67	Ohms
2	Fs	37.74	Hz
3	Re	5.19	Ohms[dc]
4	Res	96.66	Ohms
5	Qms	8.09	
6	Qes	0.43	
7	Qts	0.41	
8	L1	1.29	mH
9	L2	1.55	mH
10	R2	7.82	Ohms
11	RMSE-load	0.95	Ohms
12	Vas(Sd)	174.93	liters
13	Mms	203.81	grams
14	Cms	87	$\mu\text{M}/\text{Newton}$
15	B1	24.03	Tesla-M
16	SPLref(Sd)	95.2	dB[Re]
17	Rub-index	0.03	

Method: Mass-loaded (120.00 grams)

Area (Sd): 1194.59 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -21.9% (-20% to -50% is recommended).


18TBX46

MLSSA: Parameters

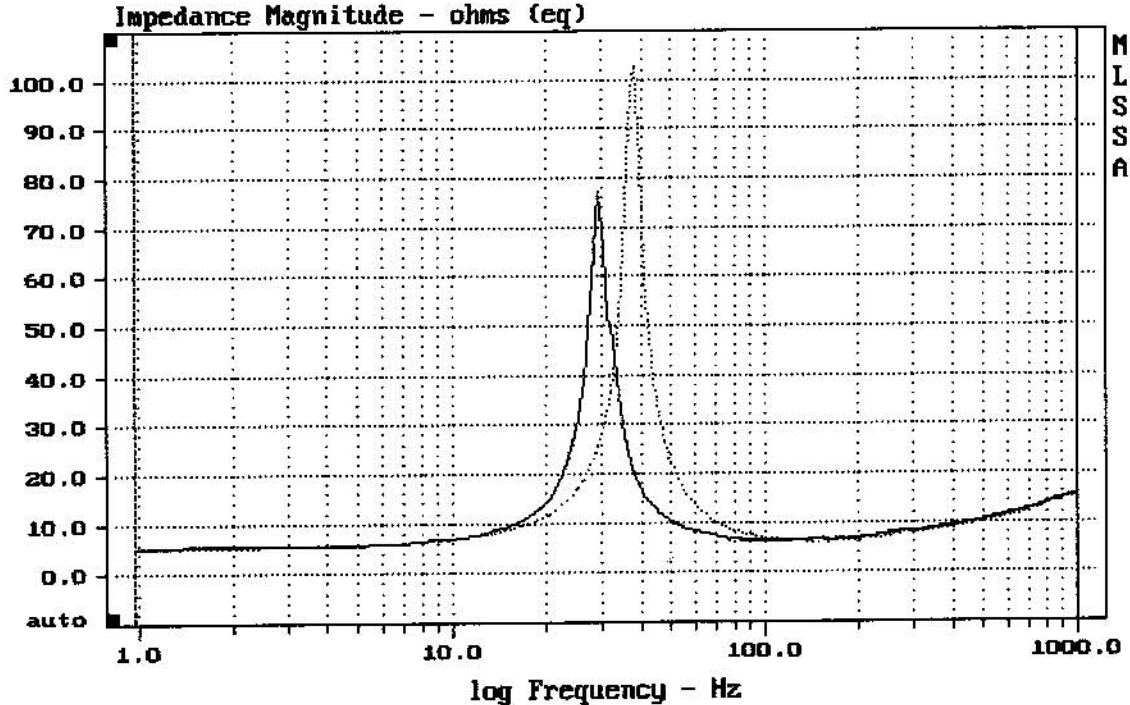

CURSOR: dy = -0.129301 x = 1000.9766 (1025)

MLSSA: Frequency Domain

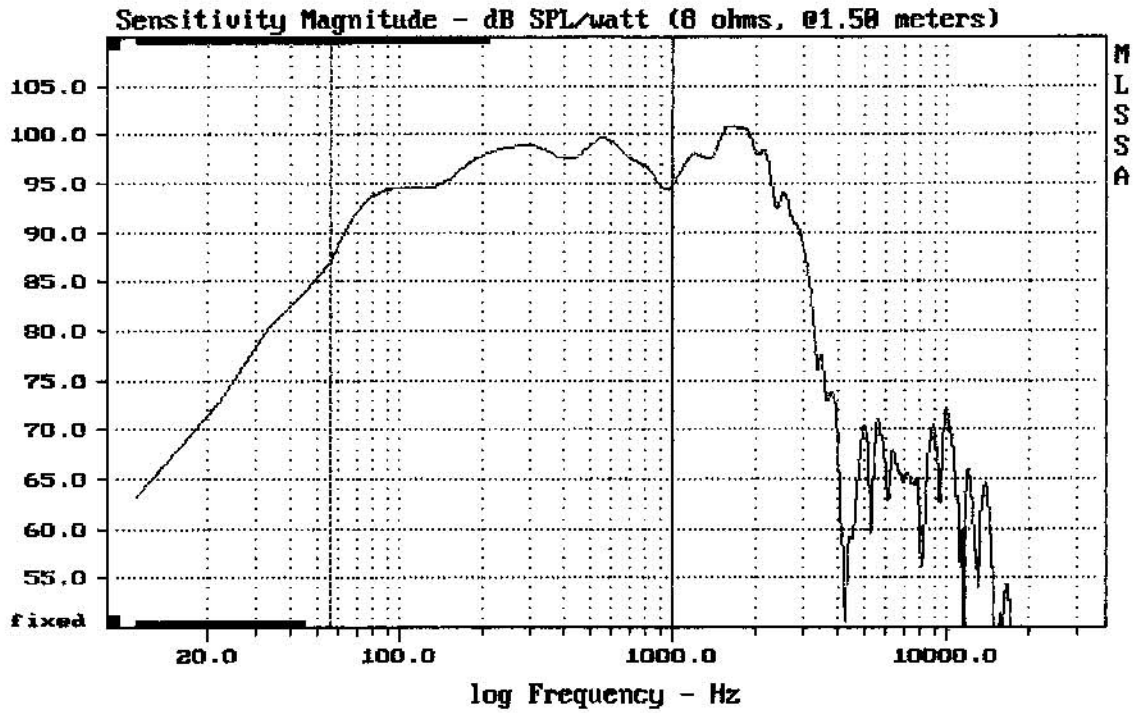



---

Level (55.999 Hz) = 96.73 dB SPL/watt (8 ohms, @1.50 meters)

---

B&C 18TXB46

MLSSA: Frequency Domain

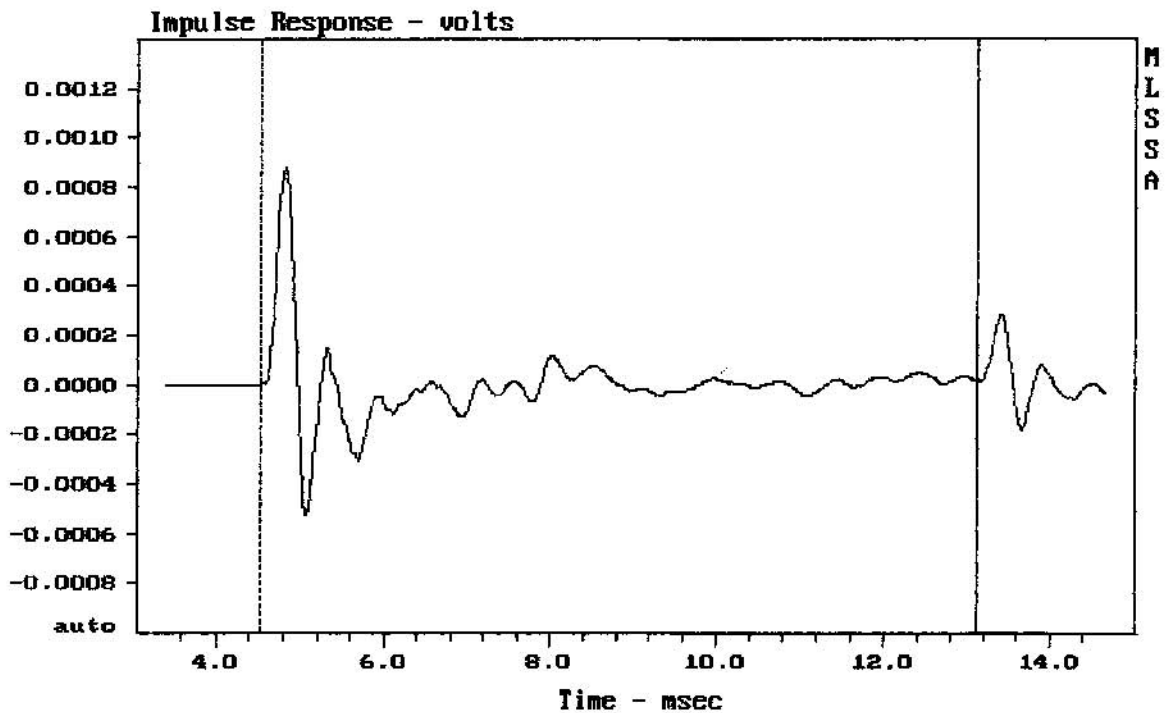


---

CURSOR:  $y = 1.92552e-005$   $x = 13.1230$  (1193)

---

B&C 18TXB46