


CURSOR: $dy = -4.96738e-005$ $x = 9.5480$ (868)

12FHX76


MLSSA: Time Domain

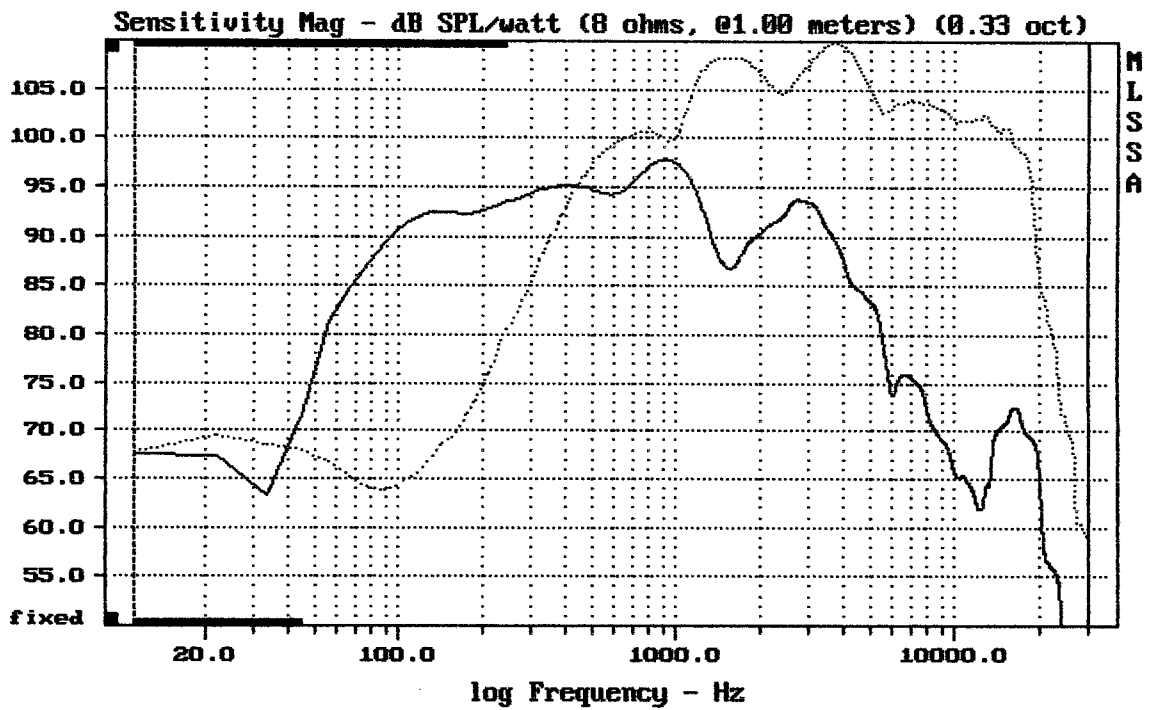

CURSOR: $dy = 22.0995$ $x = 30007.1014$ (2704)

12FHX76


MLSSA: Frequency Domain

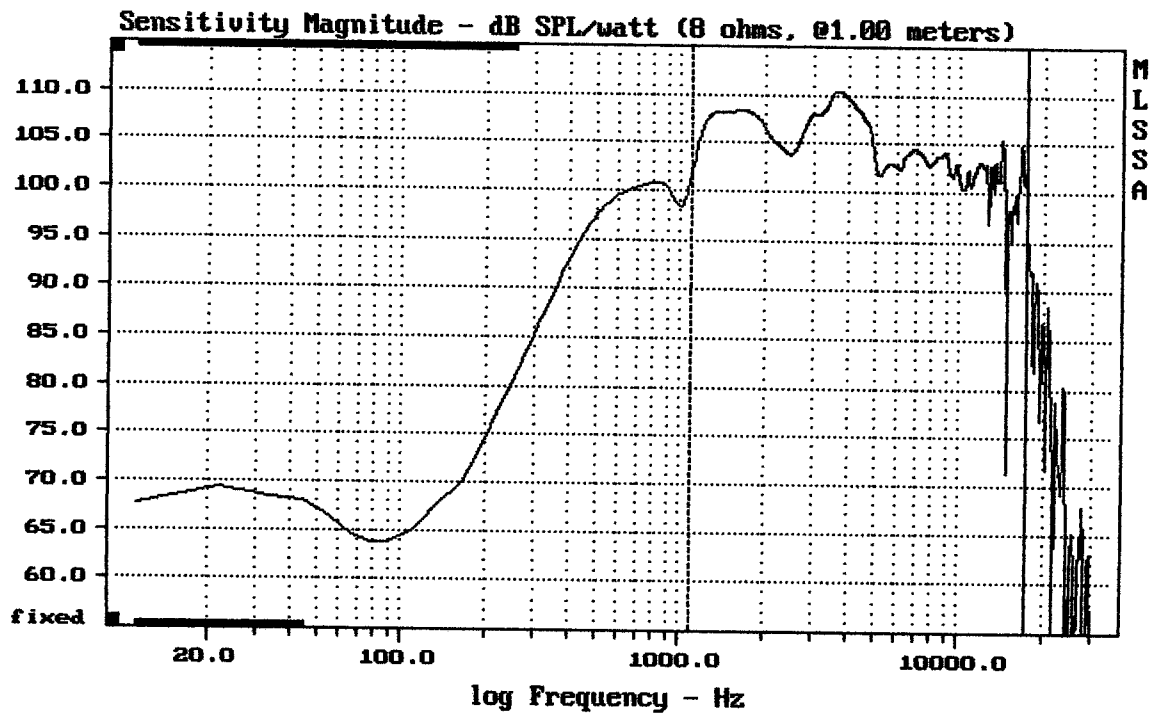

Level (1899:17500 Hz) = 105.98 dB SPL/watt (8 ohms, @1.00 meters)


12FHX76

MLSSA: Frequency Domain

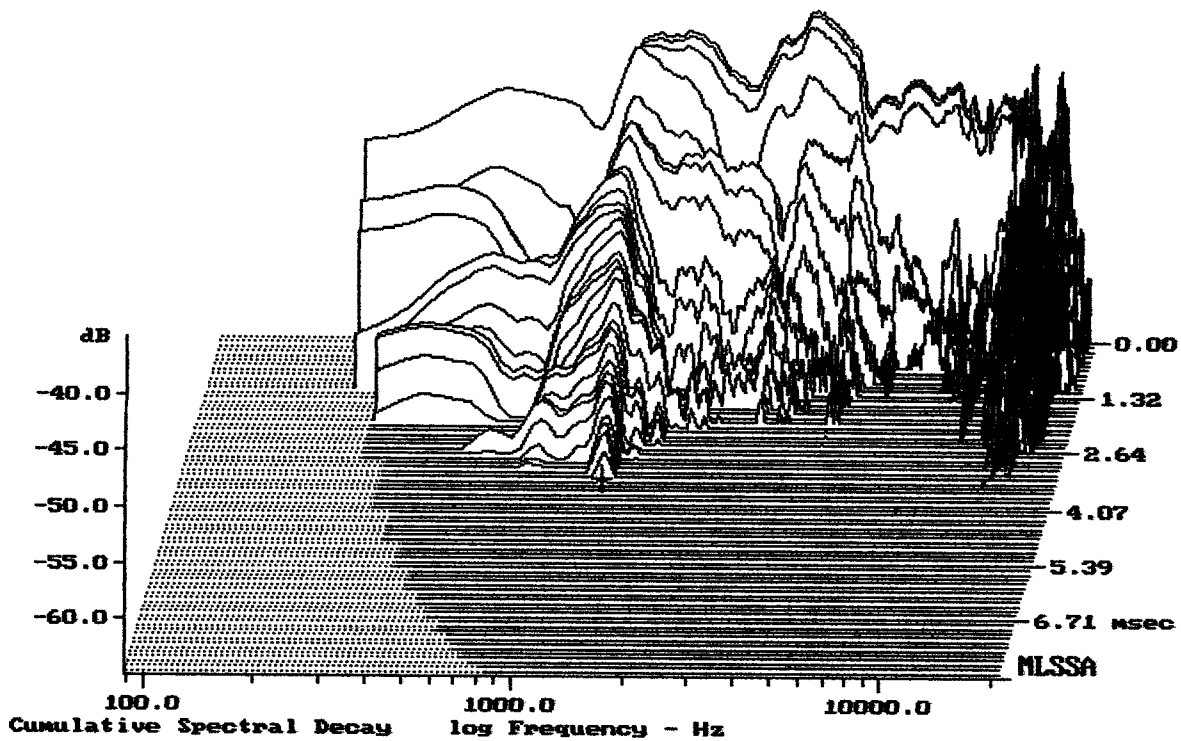

-64.73 dB, 1243 Hz (28), 3.410 msec (32)


DTTO

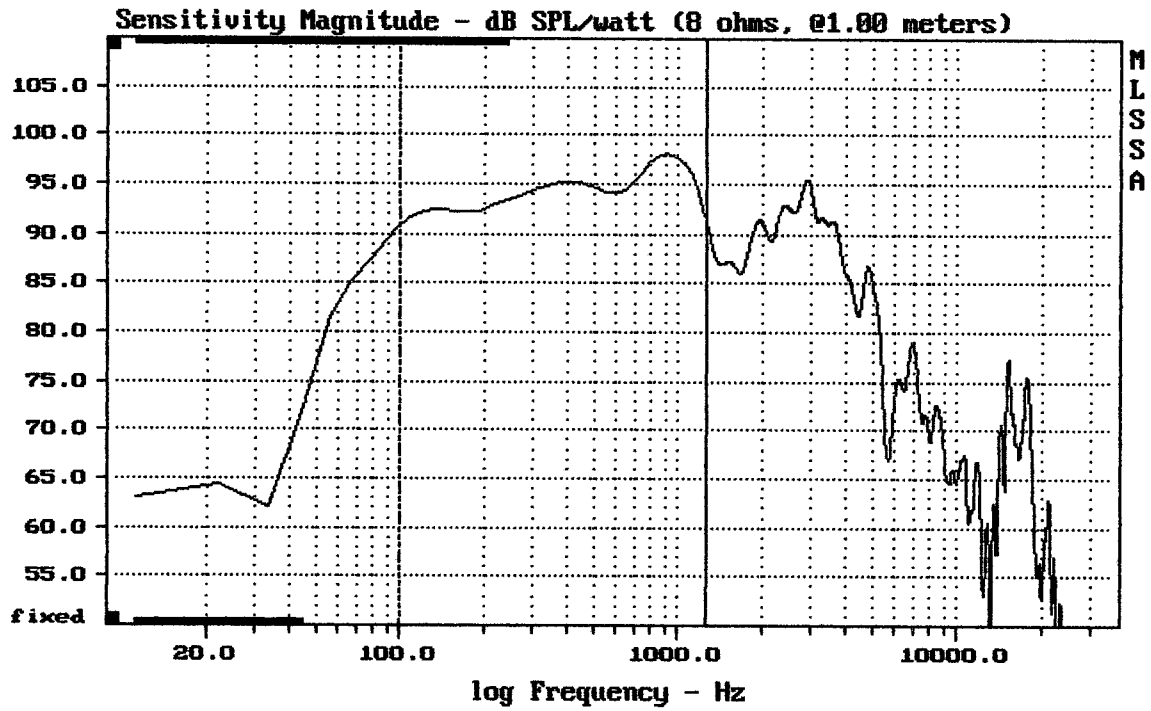

Level (100:1254 Hz) = 94.68 dB SPL/watt (8 ohms, @1.00 meters)

12FHX76

MLSSA: Frequency Domain

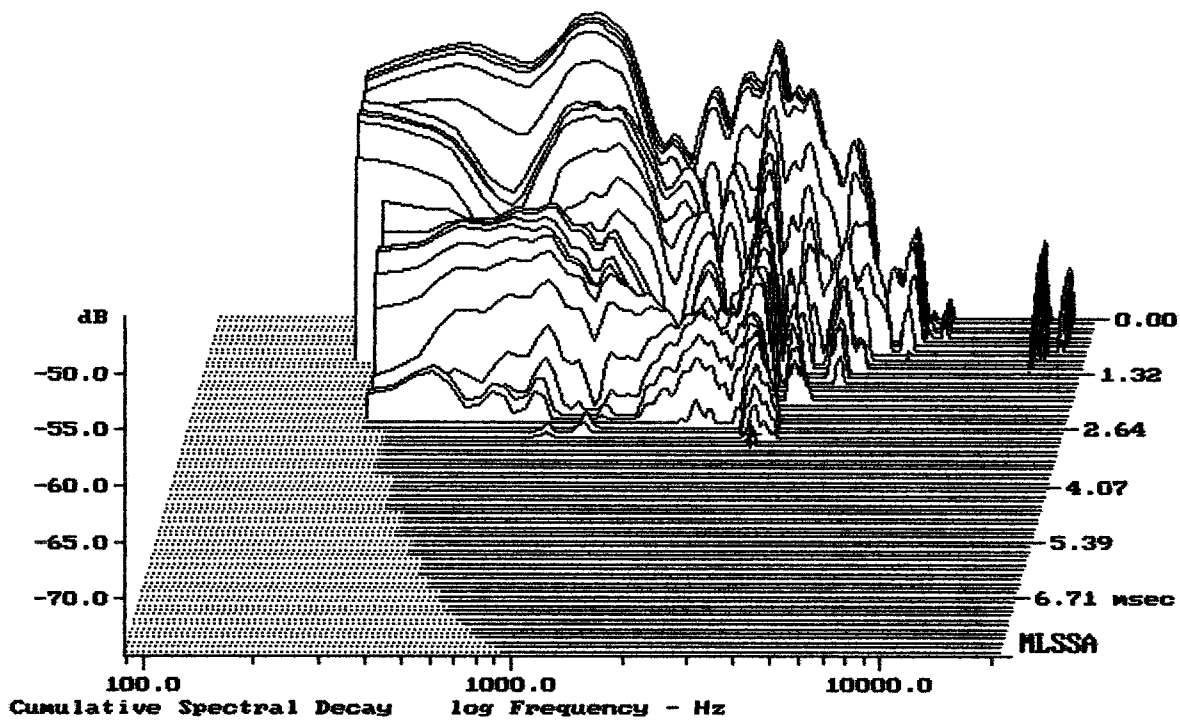

-74.35 dB, 3018 Hz (68), 2.970 msec (28)

DITO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.28	Ohms
2	Fs	46.45	Hz
3	Re	5.16	Ohms[dc]
4	Res	109.02	Ohms
5	Qms	7.87	
6	Qes	0.37	
7	Qts	0.36	
8	L1	0.98	mH
9	L2	1.08	mH
10	R2	4.72	Ohms
11	RMSE-load	0.74	Ohms
12	Vas(Sd)	98.92	liters
13	Mms	45.06	grams
14	Cms	260	$\mu\text{M}/\text{Newton}$
15	B1	13.50	Tesla-M
16	SPLref(Sd)	96.1	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (70.00 grams)

Area (Sd): 520.00 sq cm


DCR mode: Measure (-0.12 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -35.9% (-20% to -50% is recommended).

12FHX76

MLSSA: Parameters

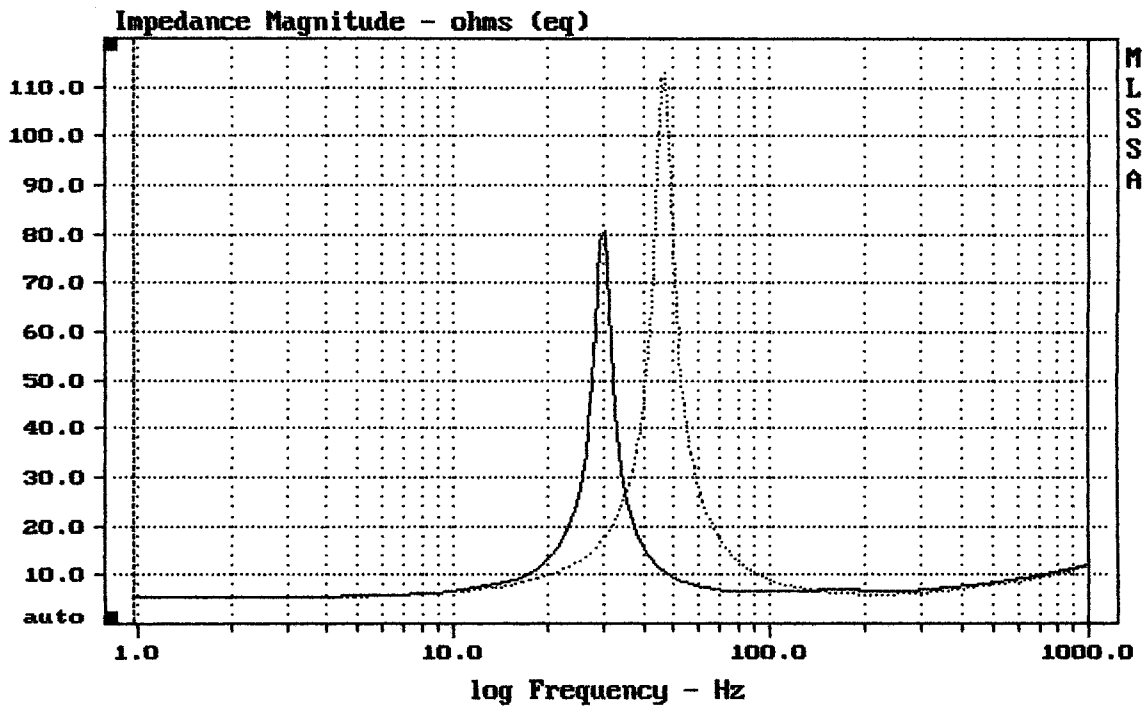

mean: 10.06, rms: 13.62, std: 9.176, max: 113.2, min: 5.261

DTTO

MLSSA: Frequency Domain