


Level (100:3207 Hz) = 97.33 dB SPL/watt (8 ohms, @1.00 meters)

12FW76

MLSSA: Frequency Domain

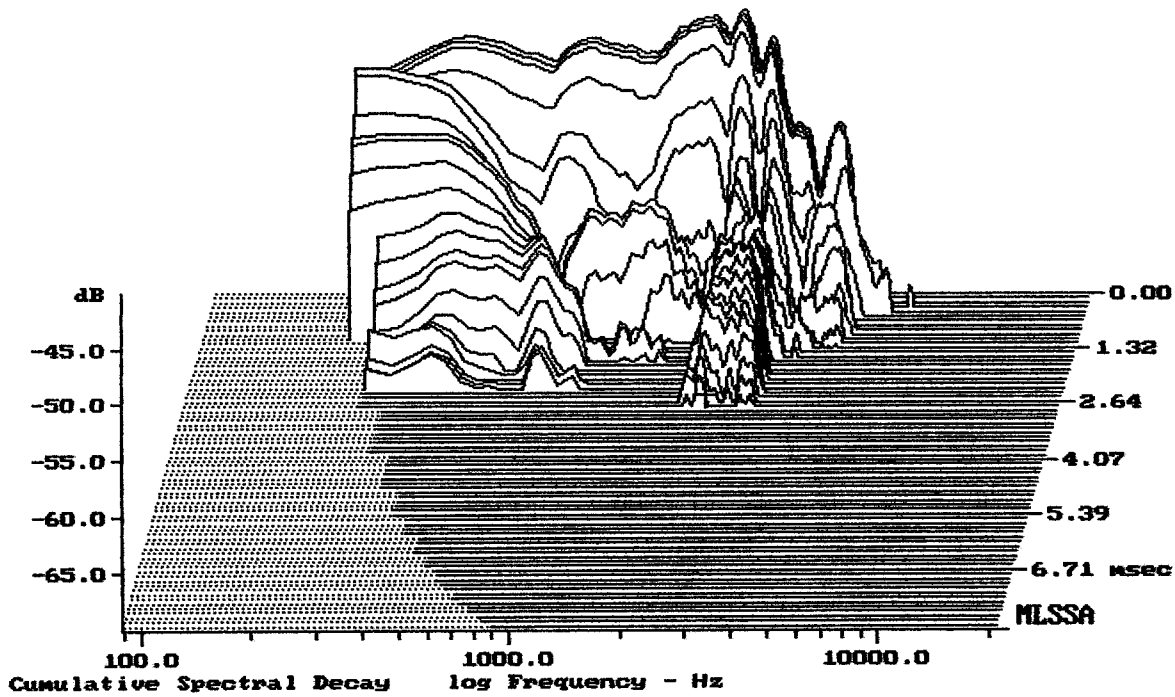

-69.02 dB, 2308 Hz (52), 2.750 msec (26)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.87	Ohms
2	Fs	58.37	Hz
3	Re	5.12	Ohms[dc]
4	Res	168.16	Ohms
5	Qms	5.87	
6	Qes	0.18	
7	Qts	0.17	
8	L1	1.05	mH
9	L2	1.91	mH
10	R2	4.52	Ohms
11	RMSE-load	0.99	Ohms
12	Vas(Sd)	53.51	liters
13	Mms	55.02	grams
14	Cms	135	$\mu\text{M}/\text{Newton}$
15	B1	24.04	Tesla-M
16	SPLref(Sd)	99.6	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (60.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -30.4% (-20% to -50% is recommended).

12FW76

MLSSA: Parameters

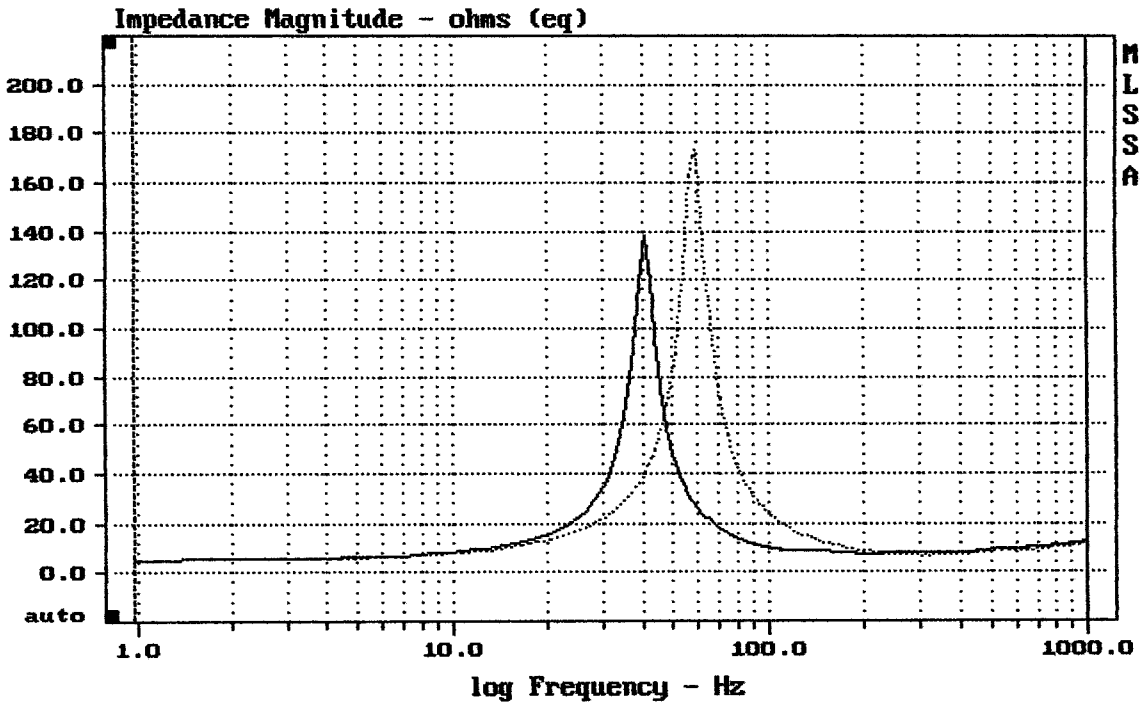

mean: 13.45, rms: 22.65, std: 18.23, max: 172.9, min: 5.261

DTTO

MLSSA: Frequency Domain