


CURSOR: dy = -19.9892 x = 30007.1014 (2704)

15FCX76


MLSSA: Frequency Domain

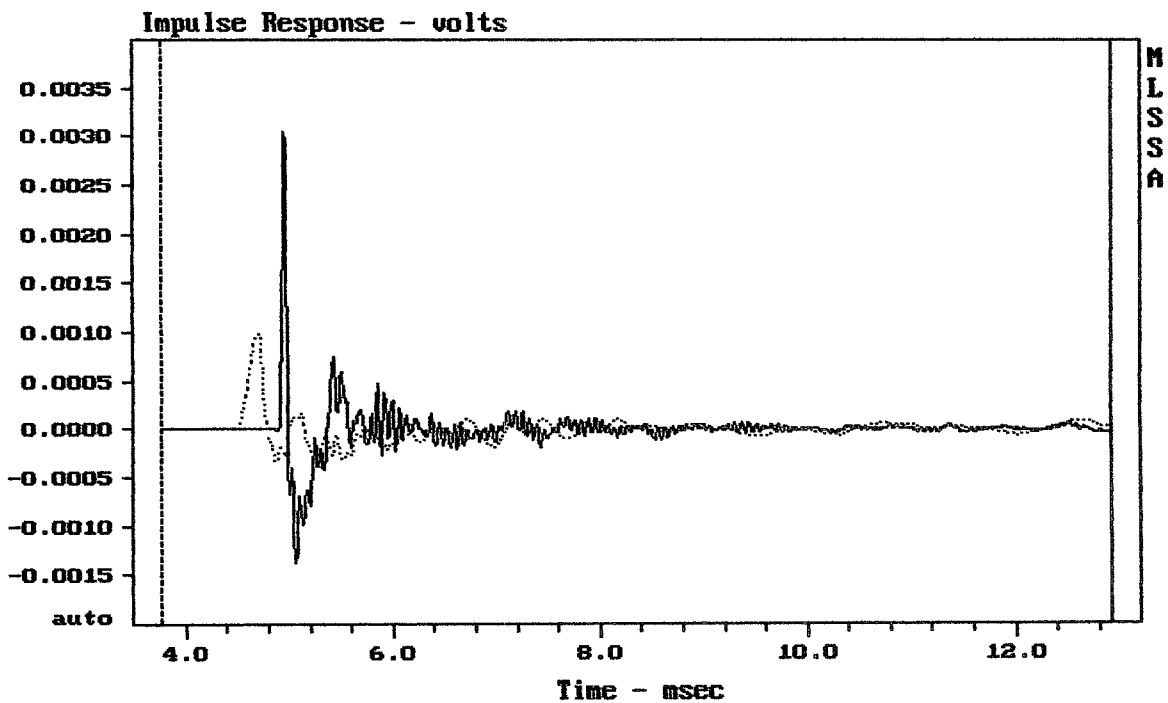

CURSOR: dy = 5.20772e-005 x = 12.9140 (1174)

15FCX76


MLSSA: Time Domain

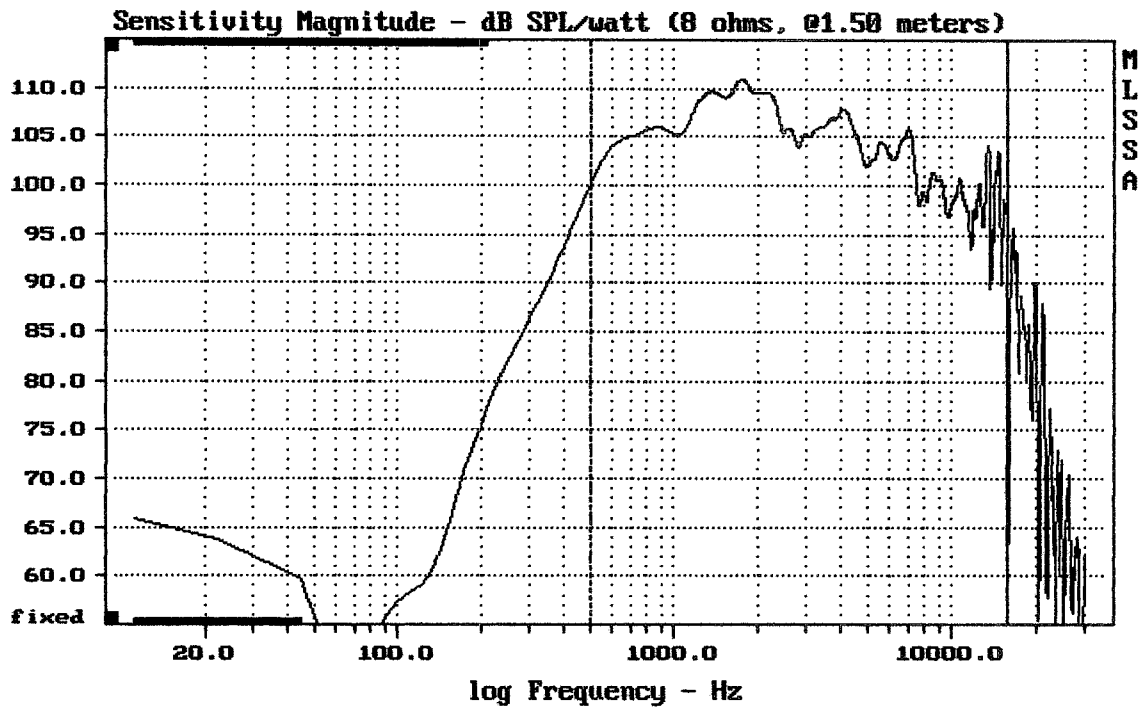

Level (499:15803 Hz) = 105.92 dB SPL/watt (8 ohms, @1.50 meters)


15FCX76

MLSSA: Frequency Domain

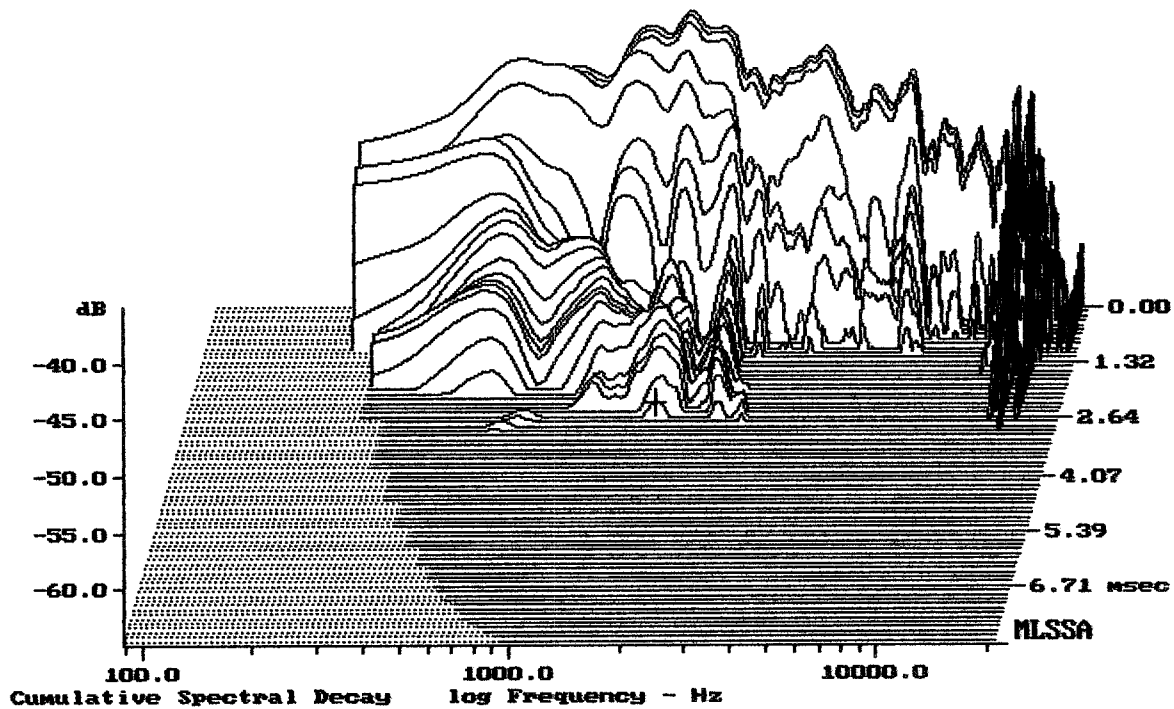

-63.74 dB, 1687 Hz (38), 2.640 msec (25)


DITO

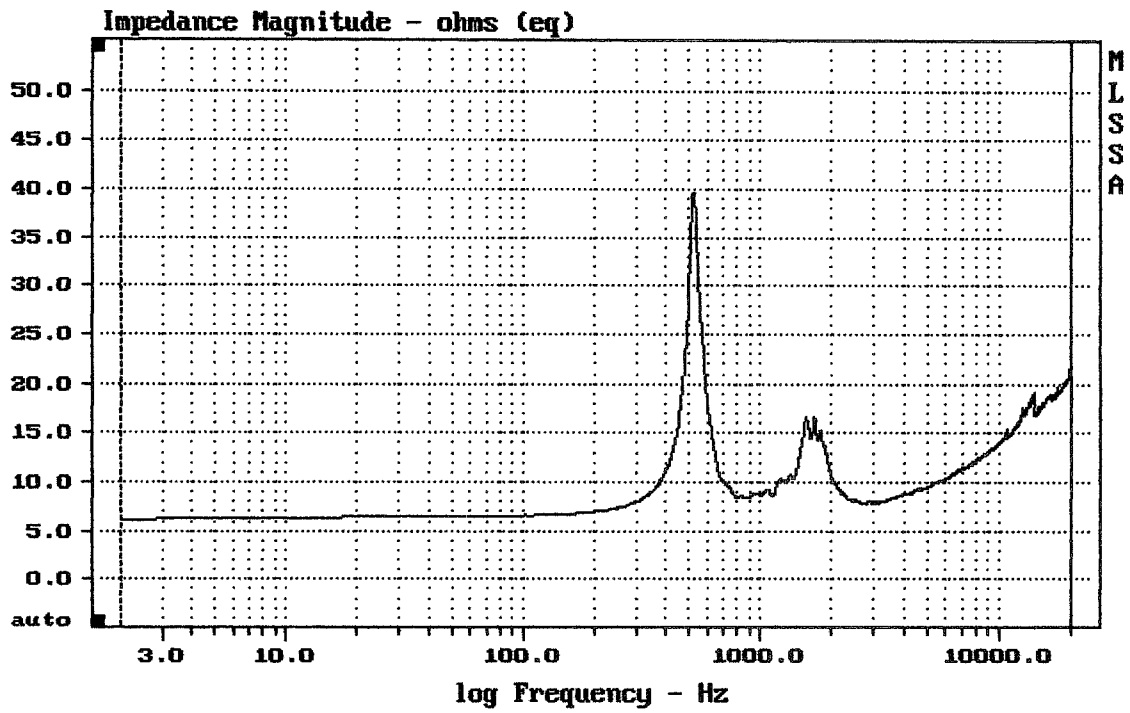

mean: 14.36, rms: 15, std: 4.319, max: 39.7, min: 6.171

15FCX76


MLSSA: Frequency Domain

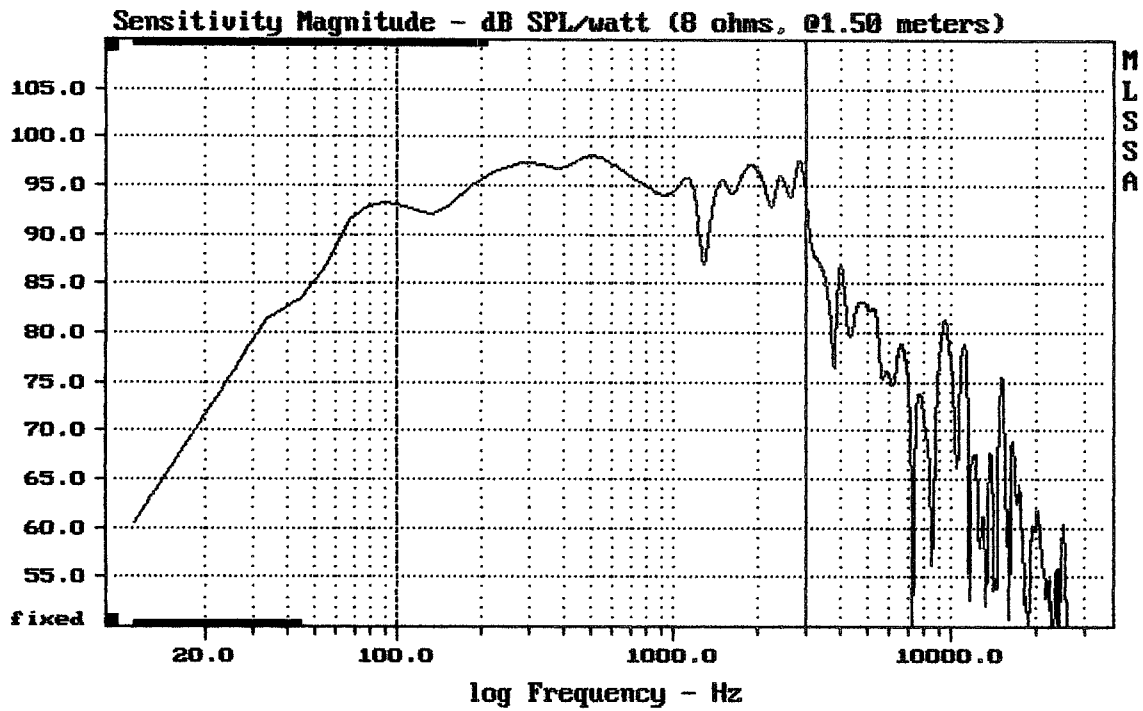

Level (100:3007 Hz) = 95.61 dB SPL/watt (8 ohms, @1.50 meters)

15FCX76

MLSSA: Frequency Domain

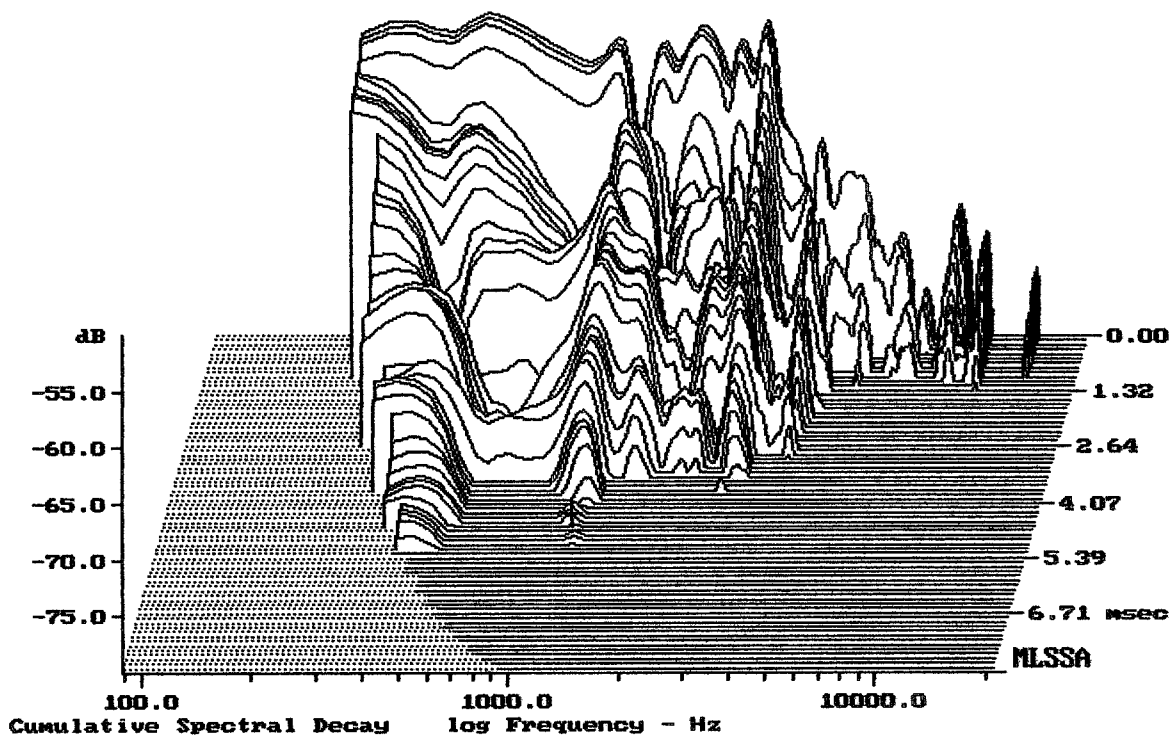

-79.26 dB, 1154 Hz (26), 4.510 msec (42)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.20	Ohms
2	Fs	48.80	Hz
3	Re	5.15	Ohms[dc]
4	Res	58.49	Ohms
5	Qms	7.03	
6	Qes	0.62	
7	Qts	0.57	
8	L1	0.89	mH
9	L2	1.12	mH
10	R2	3.81	Ohms
11	RMSE-load	0.30	Ohms
12	Vas(Sd)	132.12	liters
13	Mms	77.90	grams
14	Cms	137	μ M/Newton
15	B1	14.10	Tesla-M
16	SPLref(Sd)	95.8	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 830.00 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -28.5% (-20% to -50% is recommended).

15FCX76

MLSSA: Parameters

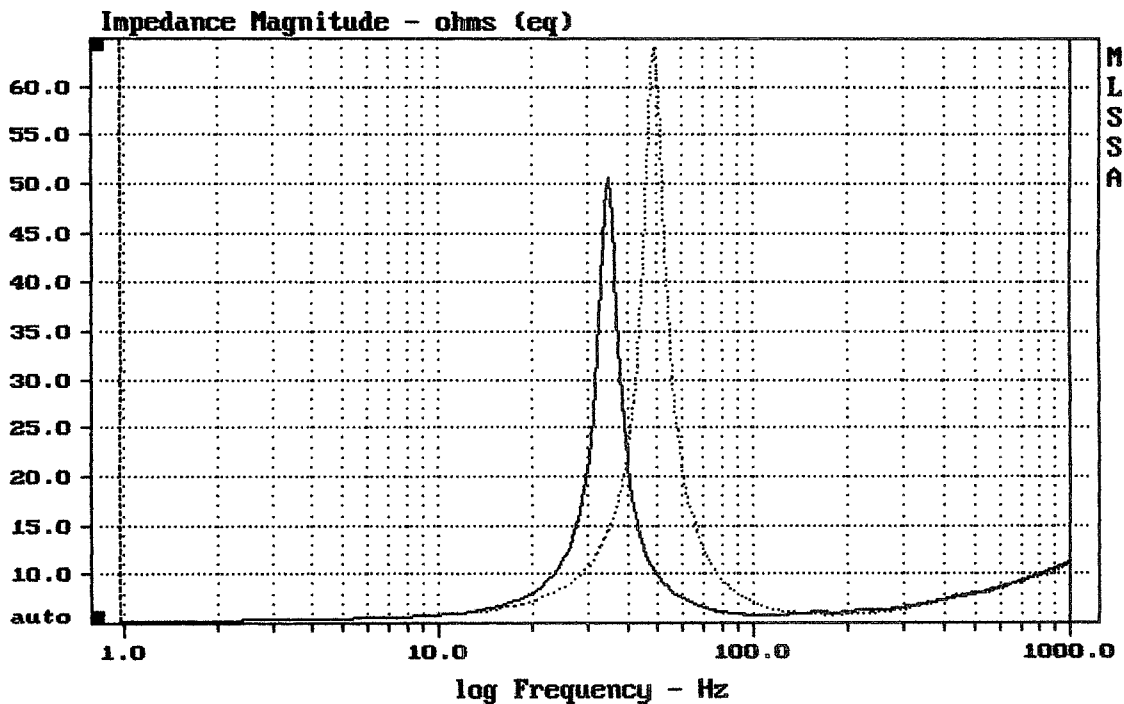

mean: 9.003, rms: 10.37, std: 5.141, max: 64.12, min: 5.264

MLSSA: Frequency Domain