


CURSOR:  $\Delta y = 4.65373e-005$   $x = 12.9800$  (1180)

15FHX76


MLSSA: Time Domain

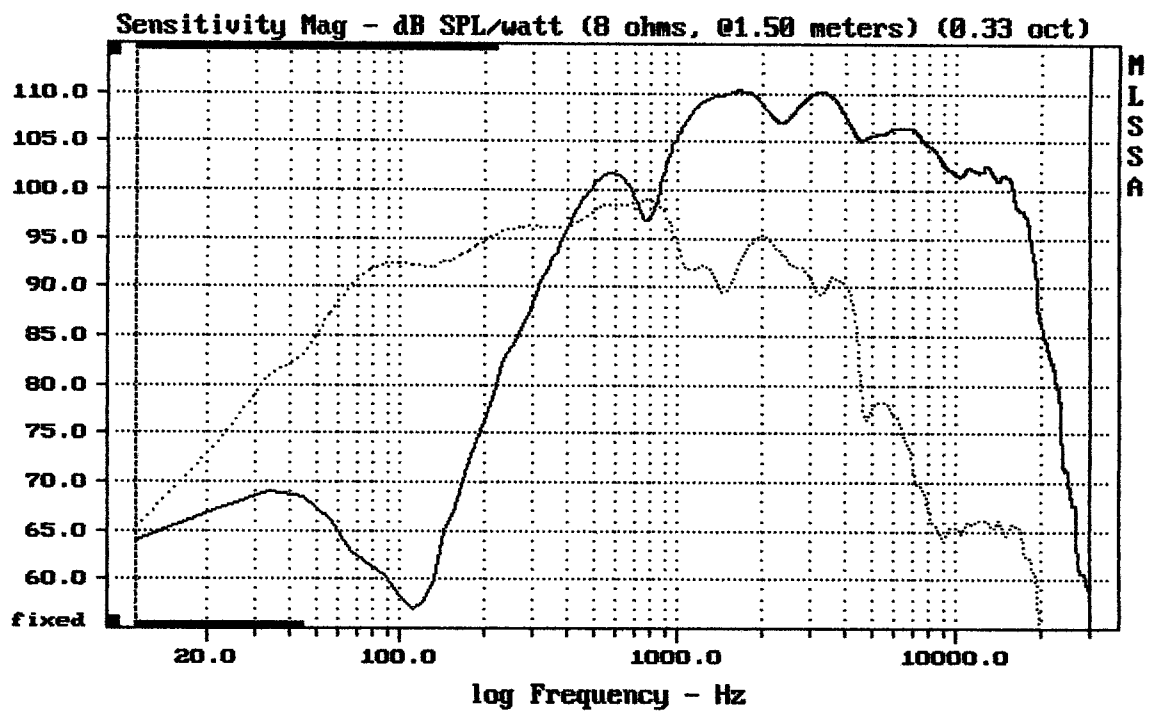

CURSOR:  $\Delta y = -24.9608$   $x = 30007.1014$  (2704)

15FHX76

MLSSA: Frequency Domain

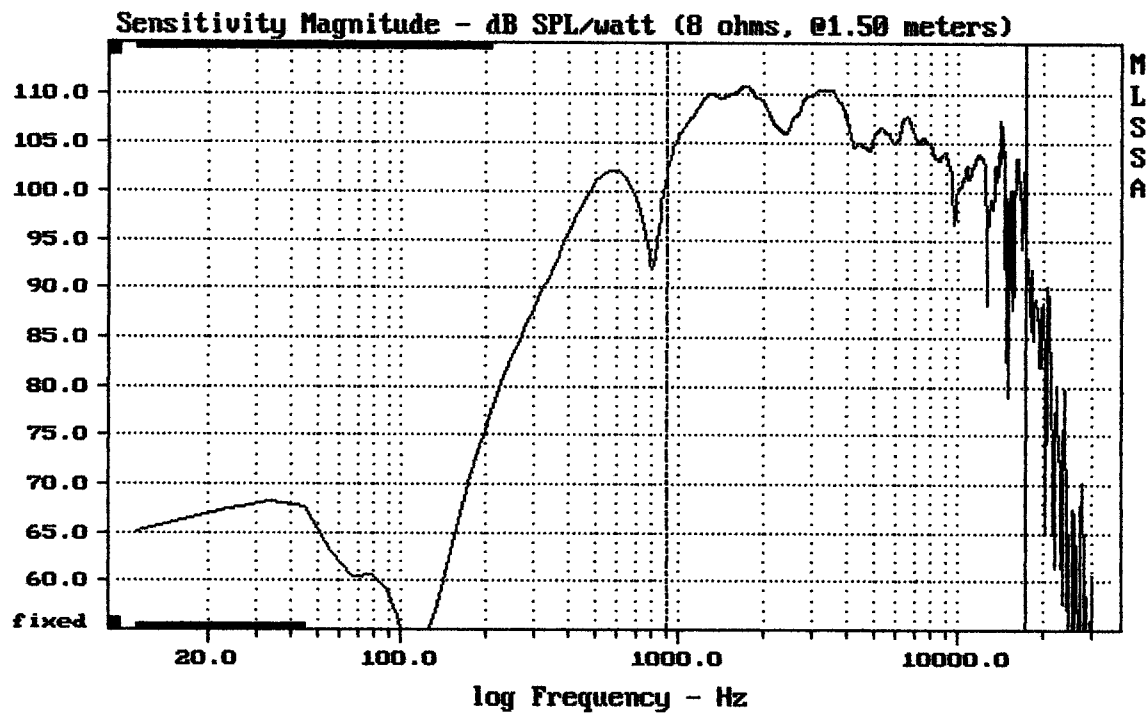



---

Level (899:17301 Hz) = 107.21 dB SPL/watt (8 ohms, @1.50 meters)

---


15FH76

MLSSA: Frequency Domain

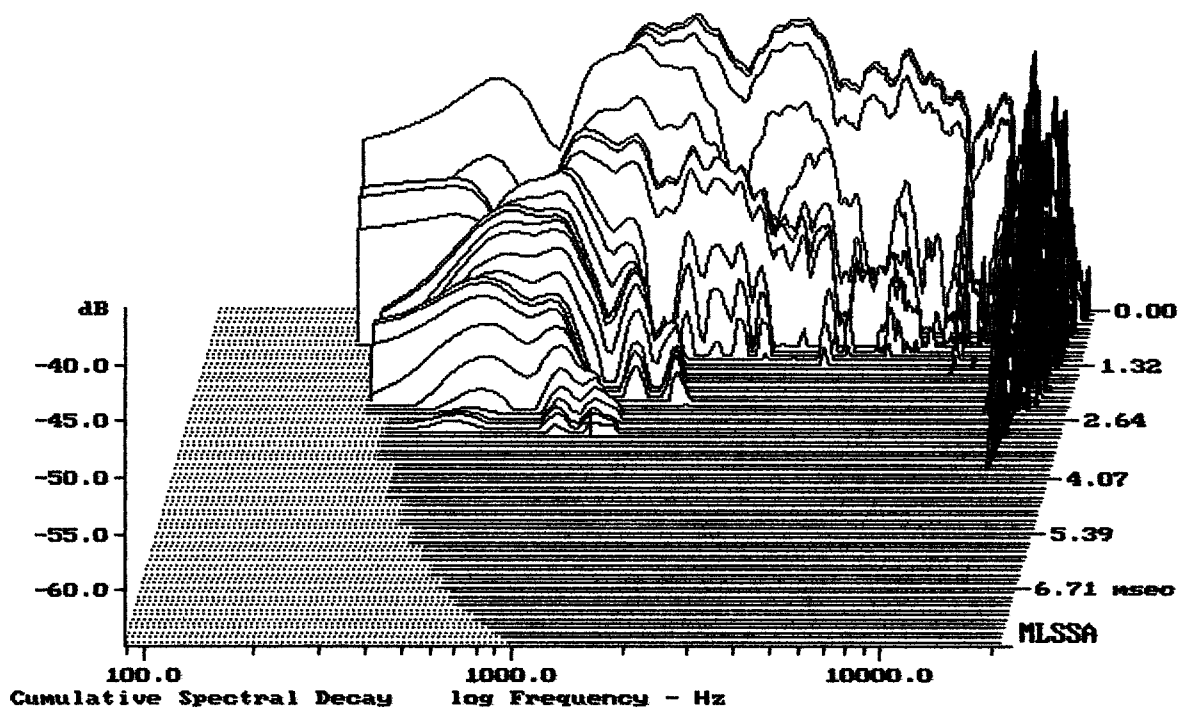

-64.16 dB, 1110 Hz (25), 2.970 msec (28)


DTTO

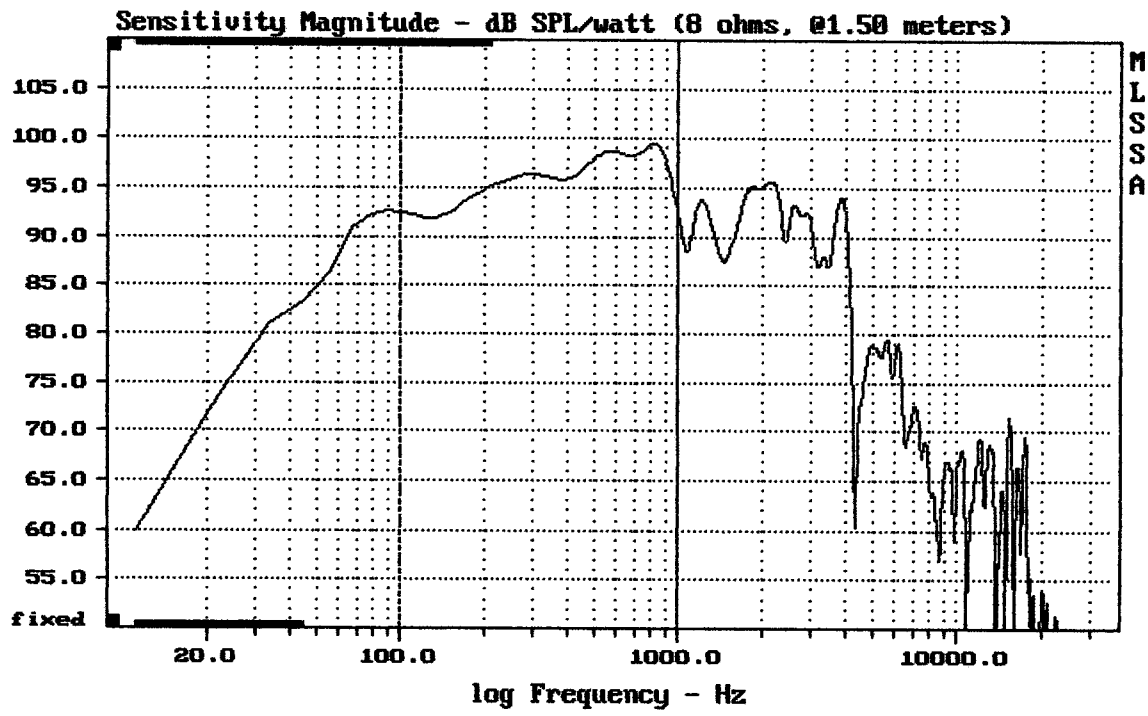

Level (100:999 Hz) = 96.26 dB SPL/watt (8 ohms, @1.50 meters)

15FH76

MLSSA: Frequency Domain

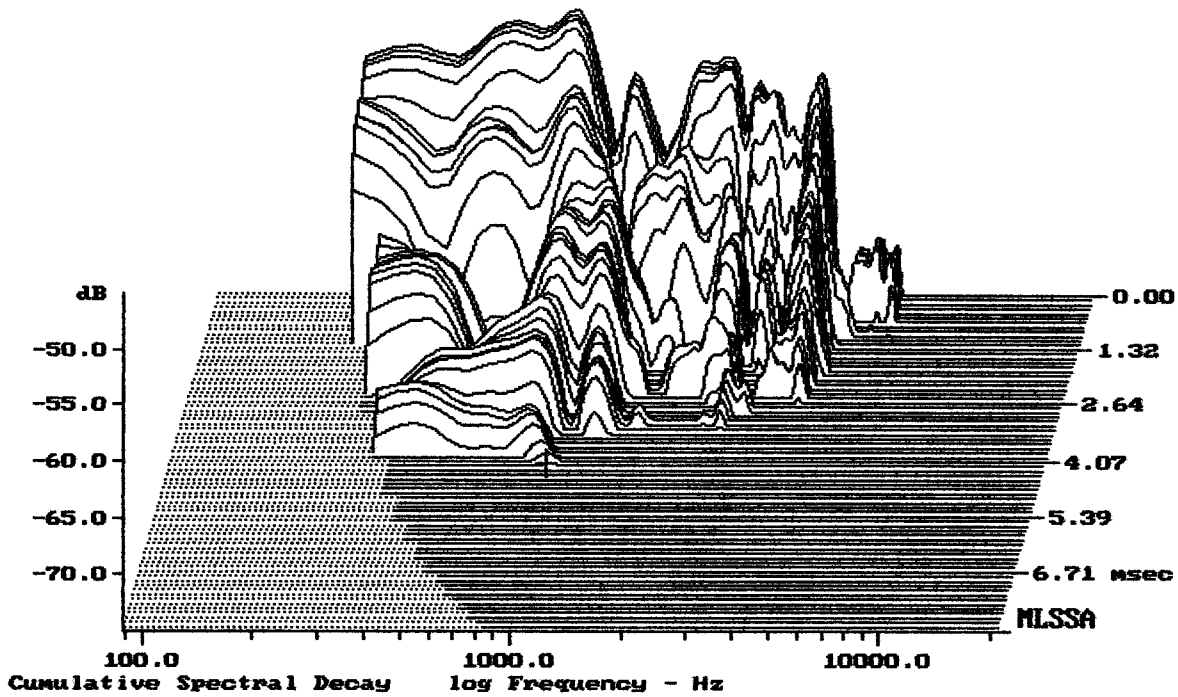

-74.82 dB, 932 Hz (21), 4.188 msec (39)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.31	Ohms
2	Fs	44.63	Hz
3	Re	5.18	Ohms[dc]
4	Res	46.11	Ohms
5	Qms	5.50	
6	Qes	0.62	
7	Qts	0.55	
8	L1	0.76	mH
9	L2	1.16	mH
10	R2	7.05	Ohms
11	RMSE-load	0.41	Ohms
12	Vas(Sd)	166.30	liters
13	Mms	78.58	grams
14	Cms	162	$\mu\text{M}/\text{Newton}$
15	B1	13.59	Tesla-M
16	SPLref(Sd)	95.6	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.12 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -29.4% (-20% to -50% is recommended).

15FHX76

MLSSA: Parameters

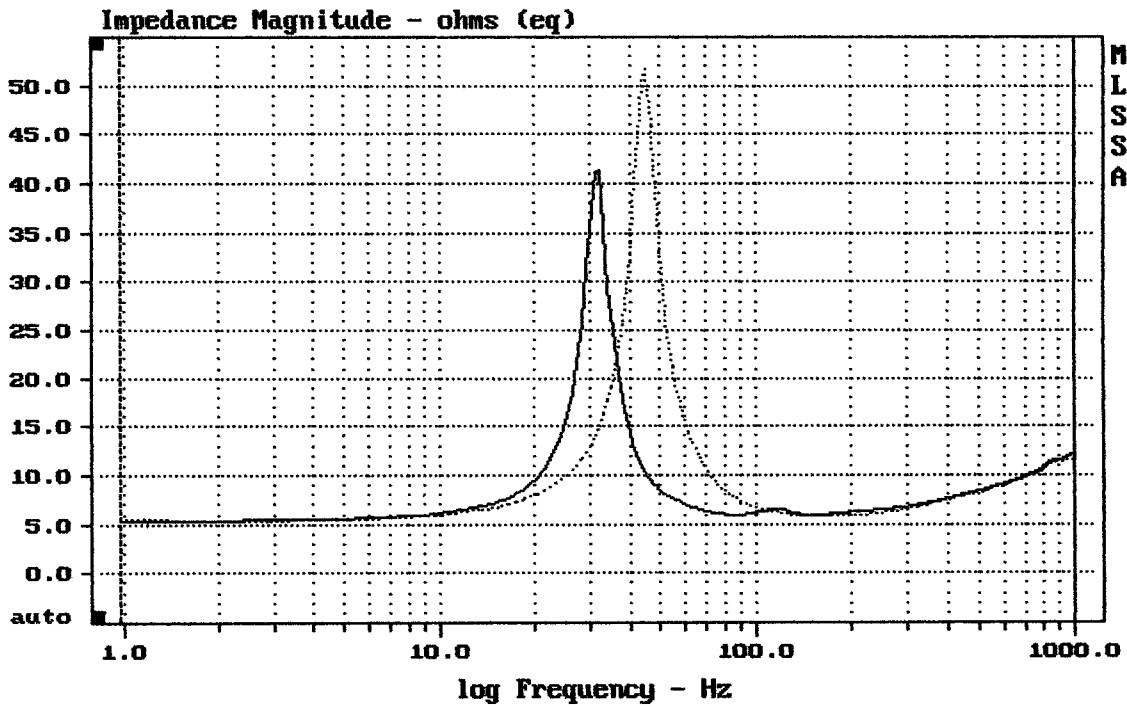

mean: 9.244, rms: 10.24, std: 4.411, max: 51.71, min: 5.326

DTTO

MLSSA: Frequency Domain