


Level (100:2009 Hz) = 96.16 dB SPL/watt (8 ohms, @1.50 meters)

18NBX100

MLSSA: Frequency Domain

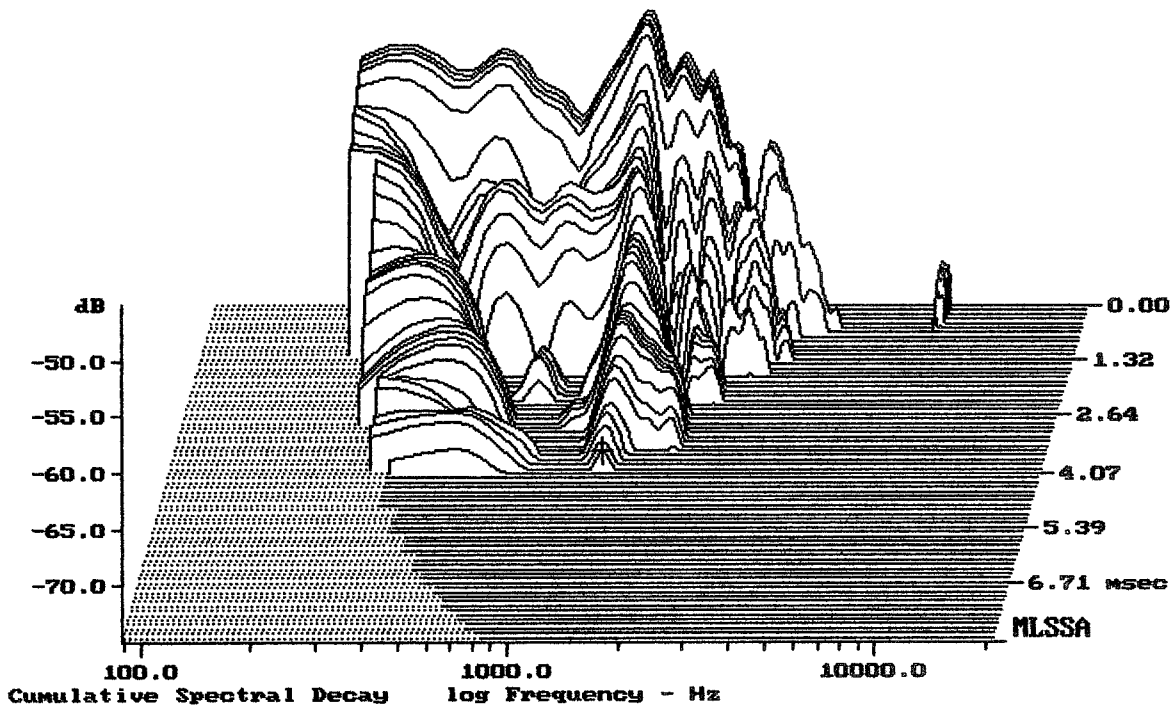

-73.46 dB, 1332 Hz (30), 3.960 msec (37)

DITO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.72	Ohms
2	Fs	43.75	Hz
3	Re	5.10	Ohms[dc]
4	Res	101.25	Ohms
5	Qms	10.45	
6	Qes	0.53	
7	Qts	0.50	
8	L1	1.21	mH
9	L2	1.60	mH
10	R2	9.55	Ohms
11	RMSE-load	0.62	Ohms
12	Vas(Sd)	131.07	liters
13	Mms	212.95	grams
14	Cms	62	$\mu\text{M}/\text{Newton}$
15	B1	23.81	Tesla-M
16	SPLref(Sd)	95.0	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (120.00 grams)

Area (Sd): 1225.42 sq cm


DCR mode: Measure (-0.17 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -20.4% (-20% to -50% is recommended).

18NBX100

MLSSA: Parameters

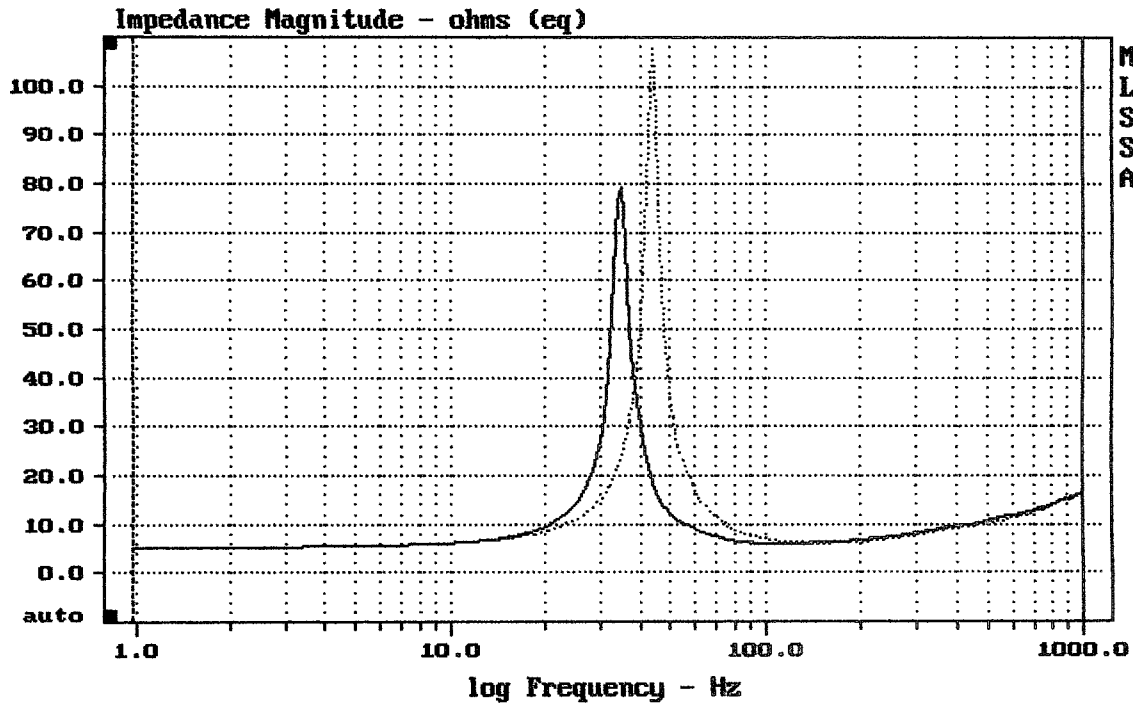

mean: 11.57, rms: 13.74, std: 7.405, max: 107.5, min: 5.239

MLSSA: Frequency Domain