


Level (100:5005 Hz) = 99.02 dB SPL/watt (4 ohms, @1.00 meters)

BEHRINGER BUGERA 12G50J4 FROM 4x12

MLSSA: Frequency Domain.

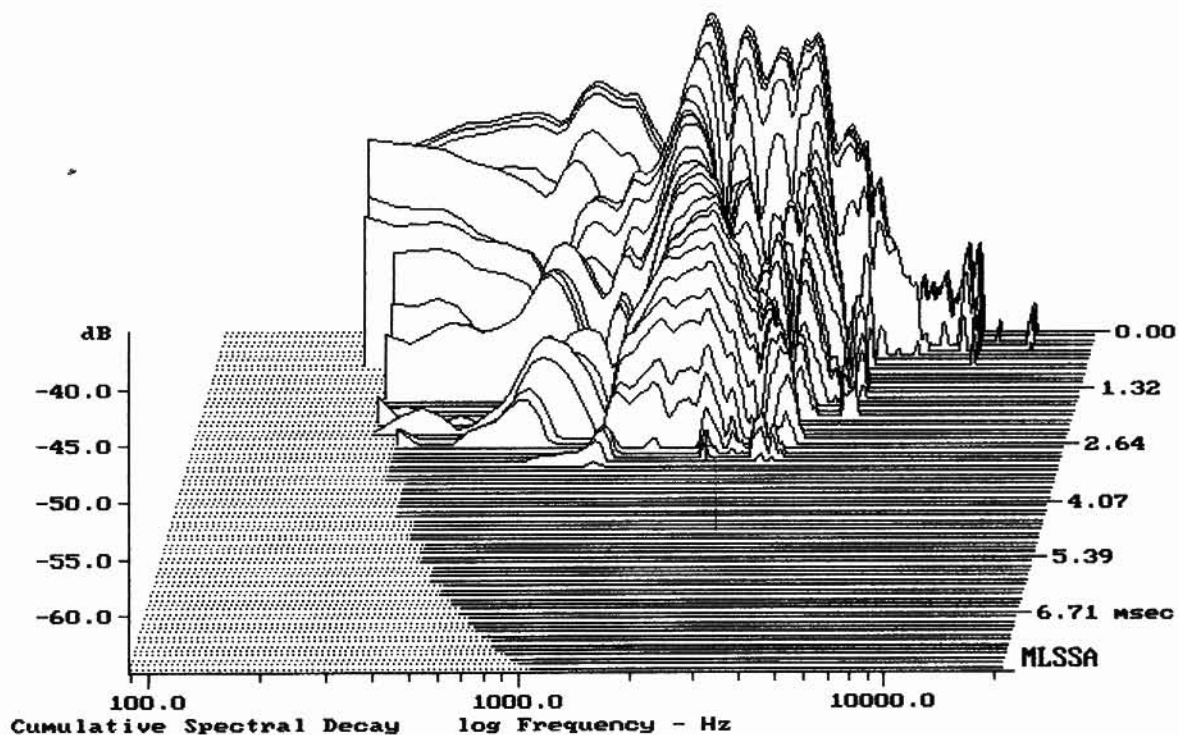

-64.03 dB, 2219 Hz (50), 2.970 msec (28)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.17	Ohms
2	Fs	66.78	Hz
3	Re	3.35	Ohms[dc]
4	Res	79.63	Ohms
5	Qms	23.25	
6	Qes	0.98	
7	Qts	0.94	
8	L1	0.27	mH
9	L2	0.46	mH
10	R2	2.63	Ohms
11	RMSE-load	0.26	Ohms
12	Vas(Sd)	86.07	liters
13	Mms	28.20	grams
14	Cms	201	$\mu\text{M}/\text{Newton}$
15	B1	6.37	Tesla-M
16	SPLref(Sd)	96.0	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (20.00 grams)

Area (Sd): 551.55 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -22.2% (-20% to -50% is recommended).

BEHRINGER BUGERA 12G50J4 FROM 4x12

MLSSA: Parameters

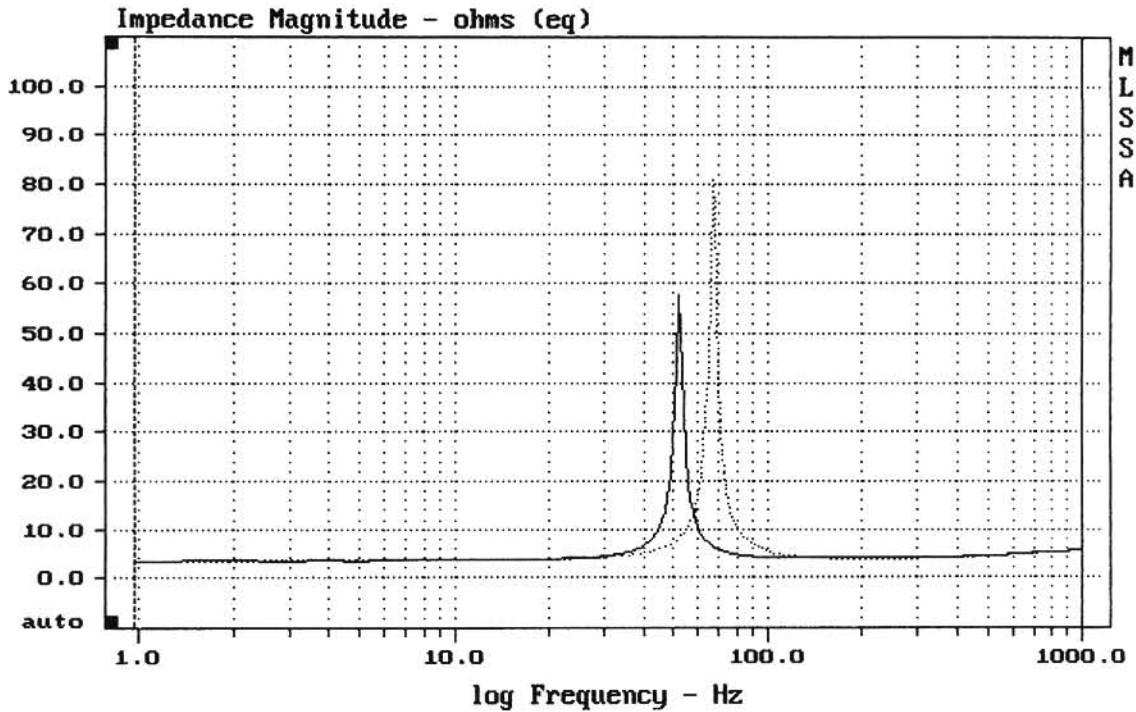

mean: 5.193, rms: 7.109, std: 4.855, max: 80.67, min: 3.399

MLSSA: Frequency Domain