

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.22	Ohms
2	Fs	31.25	Hz
3	Re	6.29	Ohms[dc]
4	Res	161.21	Ohms
5	Qms	12.57	
6	Qes	0.49	
7	Qts	0.47	
8	L1	0.77	mH
9	L2	1.88	mH
10	R2	13.44	Ohms
11	RMSE-load	1.12	Ohms
12	Vas(Sd)	385.34	liters
13	Mms	156.95	grams
14	Cms	165	$\mu\text{M}/\text{Newton}$
15	B1	19.87	Tesla-M
16	SPLref(Sd)	95.6	dB[Re]
17	Rub-index	0.02	

Method: Mass-loaded (140.00 grams)

Area (Sd): 1288.25 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -24.7% (-20% to -50% is recommended).

BEYMA 18LX60


MLSSA: Parameters

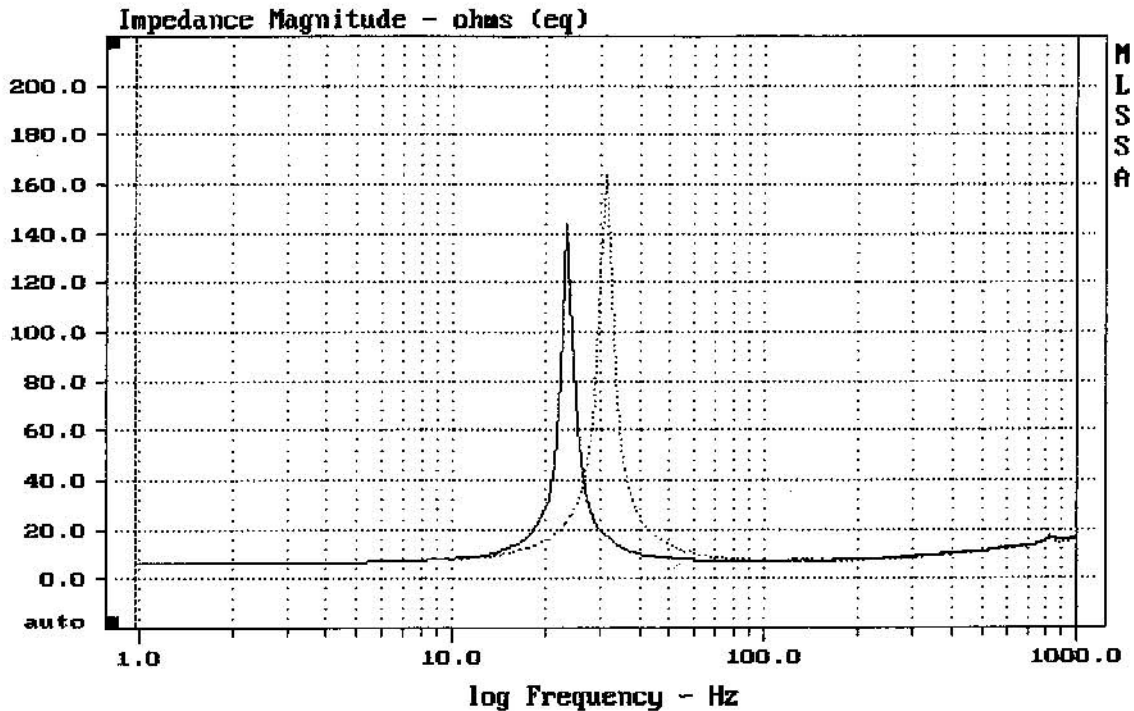

Concurrent pre-average 1 cycles

BEYMA 18LX60


MLSSA: Frequency Domain

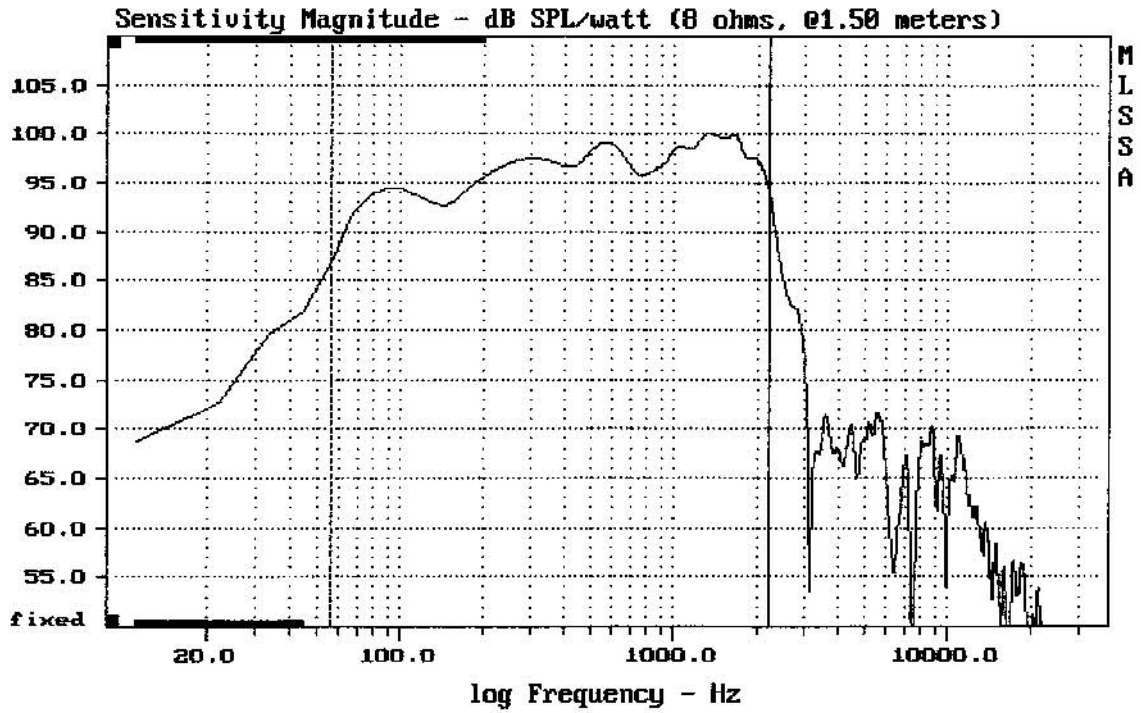

Level (55:2197 Hz) = 96.67 dB SPL/watt (8 ohms, @1.50 meters)

BEYMA 18LX60

MLSSA: Frequency Domain

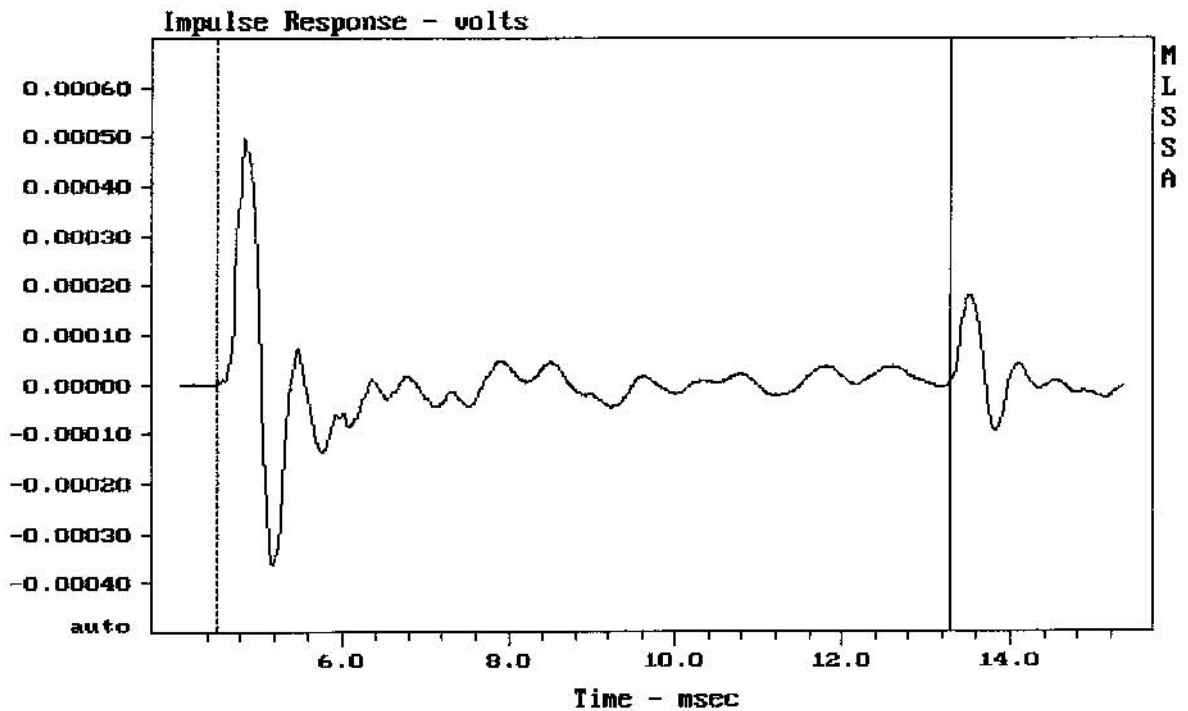

mean: $-5.774e-007$, rms: $9.189e-005$, std: $9.189e-005$, max: 0.0004993 , min: -0.0

BEYMA 18LX60