


Level (67:2009 Hz) = 95.16 dB SPL/watt (8 ohms, @1.50 meters)

15" BEYMA FROM MACH 15

MLSSA: Frequency Domain

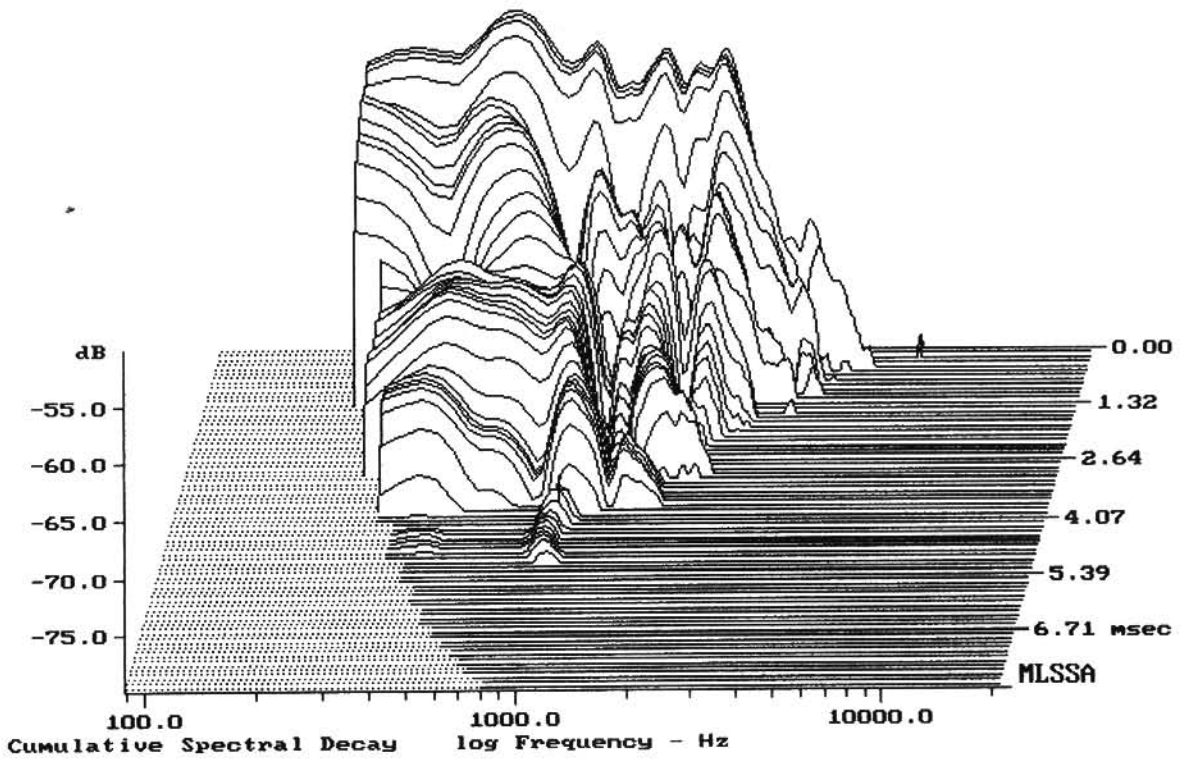

-77.35 dB, 977 Hz (22), 4.070 msec (38)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.83	Ohms
2	Fs	37.00	Hz
3	Re	5.74	Ohms[dc]
4	Res	97.38	Ohms
5	Qms	8.03	
6	Qes	0.47	
7	Qts	0.45	
8	L1	0.39	mH
9	L2	1.98	mH
10	R2	19.68	Ohms
11	RMSE-load	0.98	Ohms
12	Vas(Sd)	185.62	liters
13	Mms	115.44	grams
14	Cms	160	$\mu\text{M}/\text{Newton}$
15	B1	18.04	Tesla-M
16	SPLref(Sd)	94.8	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 907.92 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -22.0% (-20% to -50% is recommended).

15" BEYMA FROM MACH 15

MLSSA: Parameters

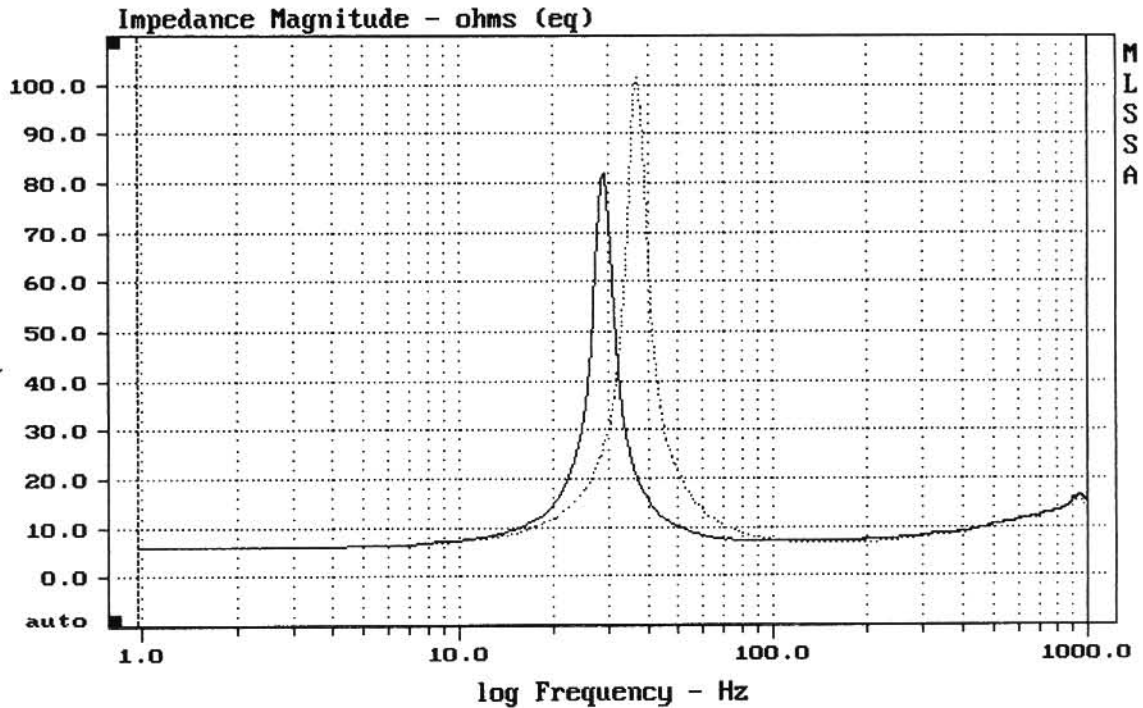

mean: 11.58, rms: 13.74, std: 7.402, max: 101.5, min: 5.825

MLSSA: Frequency Domain