



E-shop: <http://eshop.prodance.cz/cx12g251-8-ohm/d-97098/>

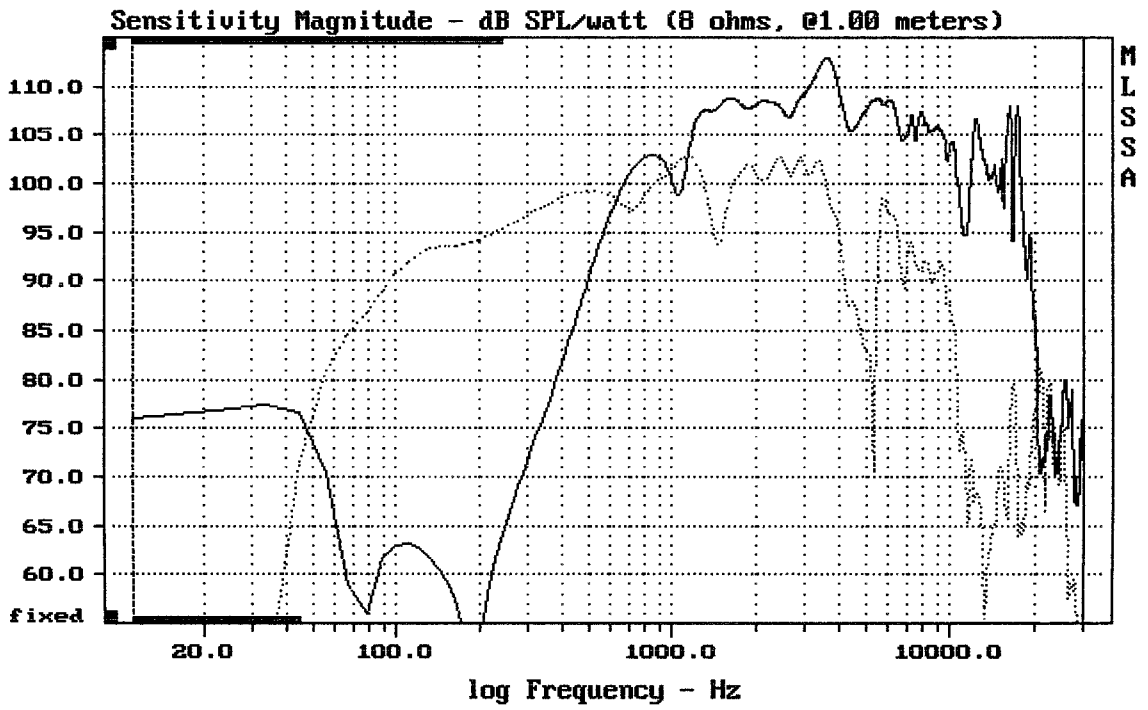

CURSOR: dy = -27.8135 x = 30007.1014 (2704)


CX12G251

MLSSA: Frequency Domain

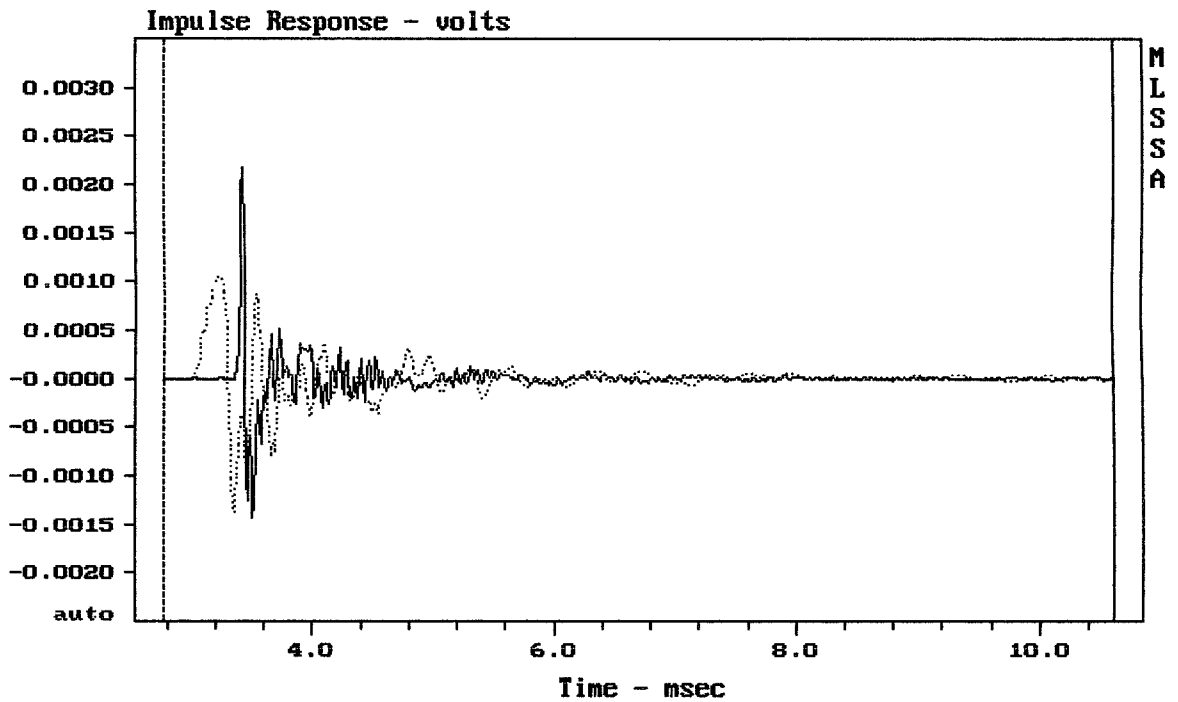

mean: 2.398e-006, rms: 0.0002267, std: 0.0002267, max: 0.001066, min: -0.001363


CX12G251

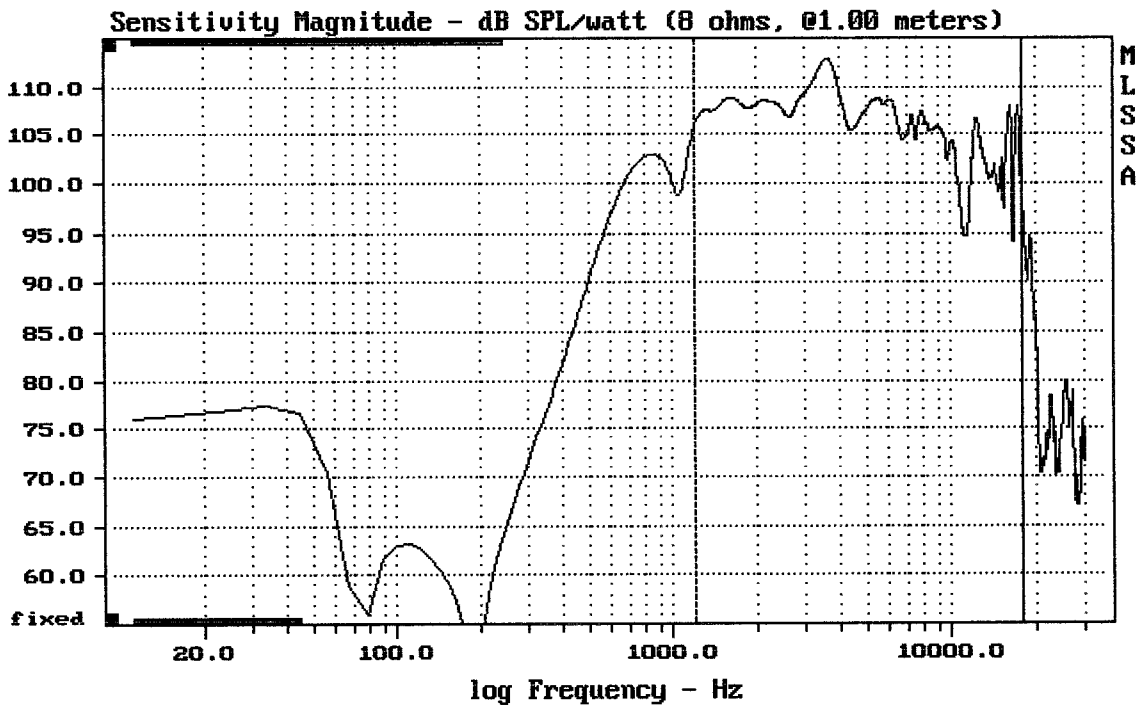


Level (1199:18100 Hz) = 107.54 dB SPL/watt (8 ohms, @1.00 meters)

CX12G251

MLSSA: Frequency Domain

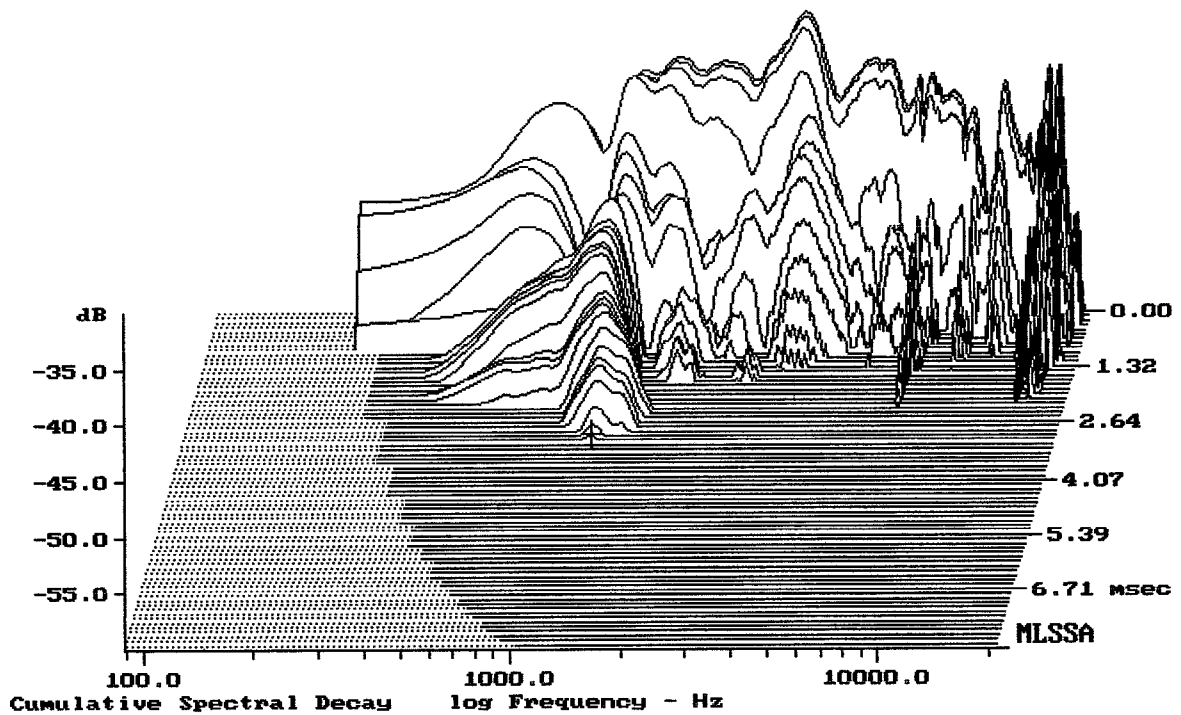

-59.42 dB, 1154 Hz (26), 3.088 msec (29)

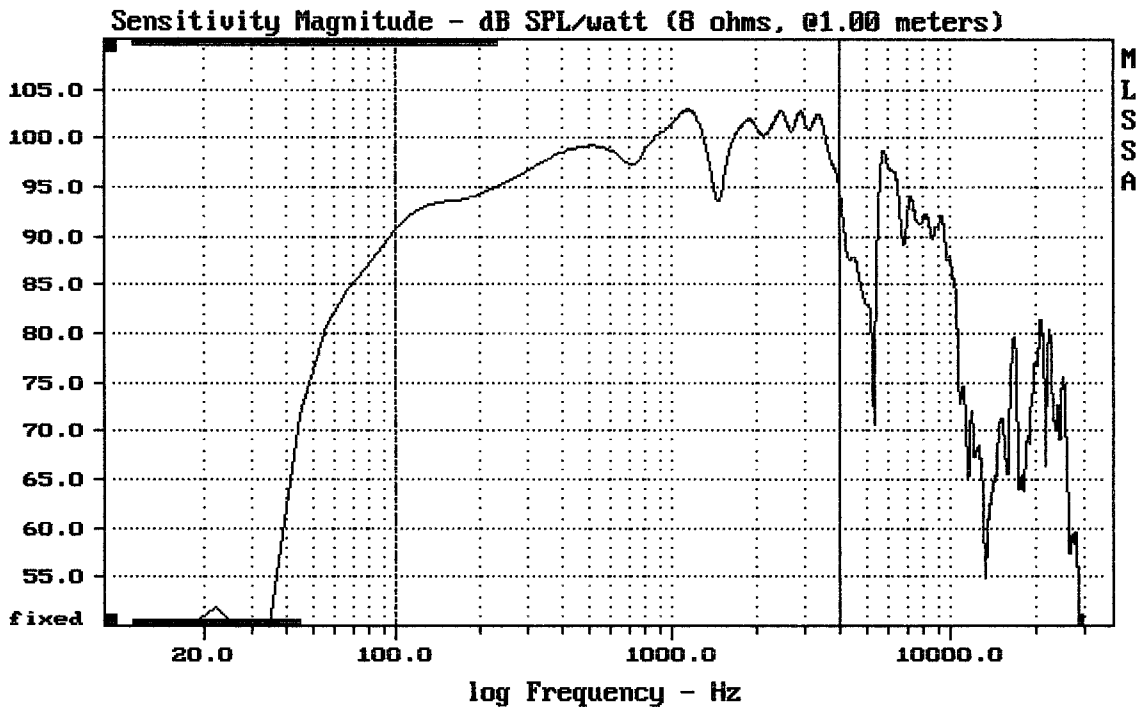


Level (100:4006 Hz) = 98.92 dB SPL/watt (8 ohms, @1.00 meters)

CX12G251

11-18-92 1:27 AM

MLSSA: Frequency Domain

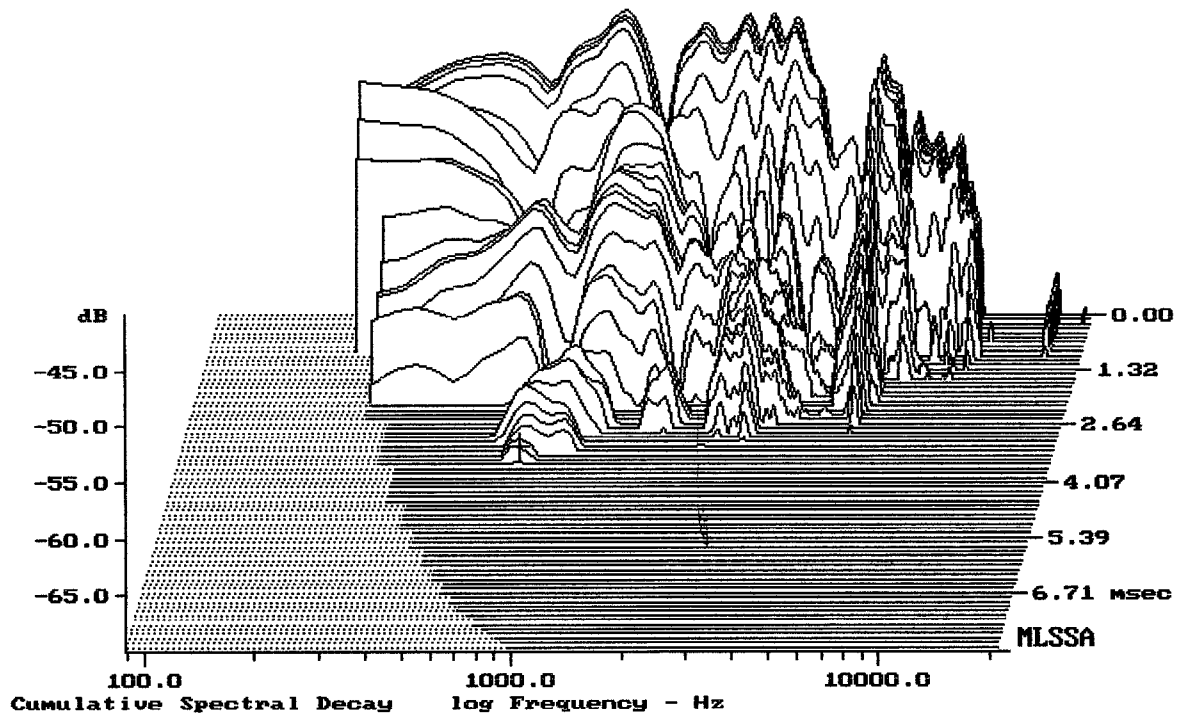

-68.75 dB, 755 Hz (17), 3.520 msec (33)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.65	Ohms
2	Fs	75.90	Hz
3	Re	5.21	Ohms[dc]
4	Res	37.73	Ohms
5	Qms	3.10	
6	Qes	0.43	
7	Qts	0.38	
8	L1	0.57	mH
9	L2	1.07	mH
10	R2	2.87	Ohms
11	RMSE-load	0.31	Ohms
12	Vas(Sd)	41.97	liters
13	Mms	36.79	grams
14	Cms	120	$\mu\text{M}/\text{Newton}$
15	B1	14.61	Tesla-M
16	SPLref(Sd)	98.2	dB[Re]
17	Rub-index	0.02	

Method: Mass-loaded (40.00 grams)

Area (Sd): 500.00 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -30.6% (-20% to -50% is recommended).

CX12G251

MLSSA: Parameters

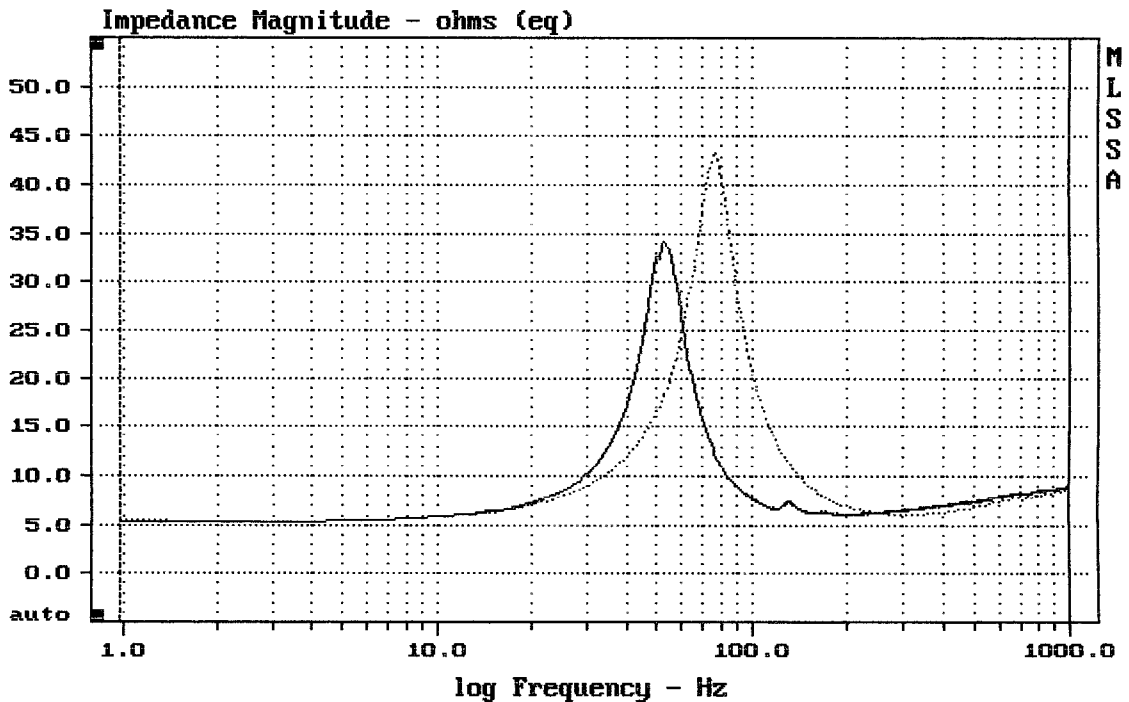

mean: 8.882, rms: 10.47, std: 5.553, max: 43.23, min: 5.309

MLSSA: Frequency Domain