



eShop: <http://eshop.prodance.cz/cx15g251-8-ohm/d-97099/>

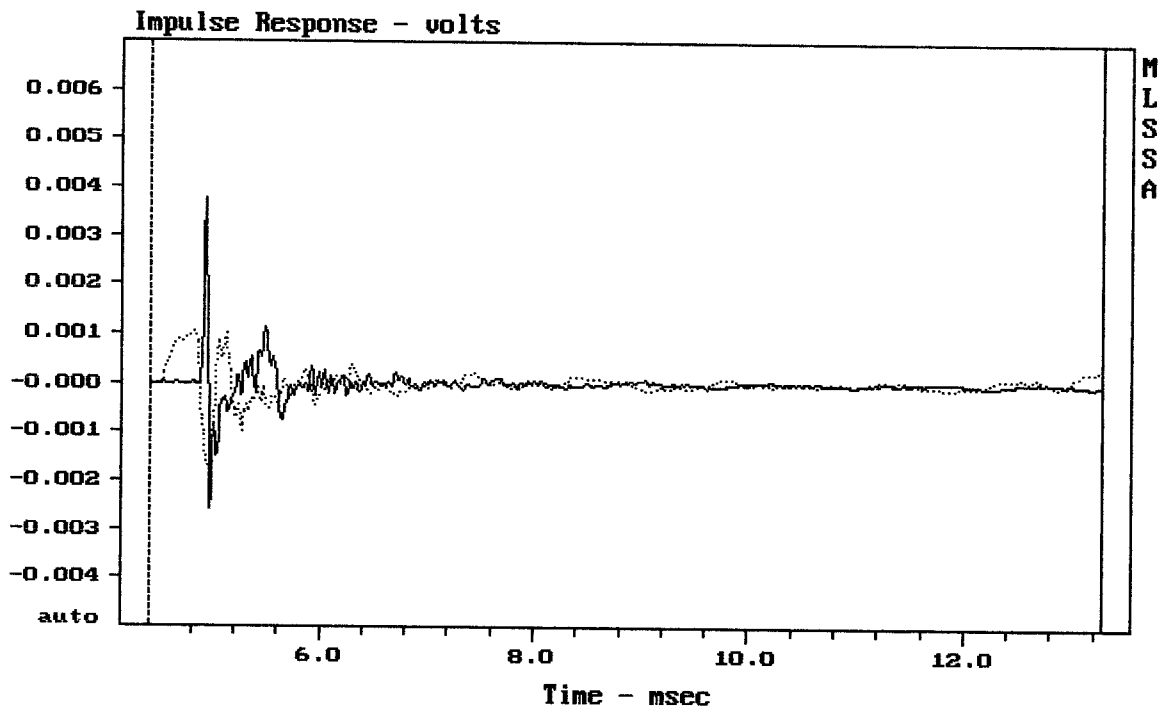

mean: 6.995e-006, rms: 0.0002773, std: 0.0002772, max: 0.001035, min: -0.001694


CX15G251

MLSSA: Time Domain

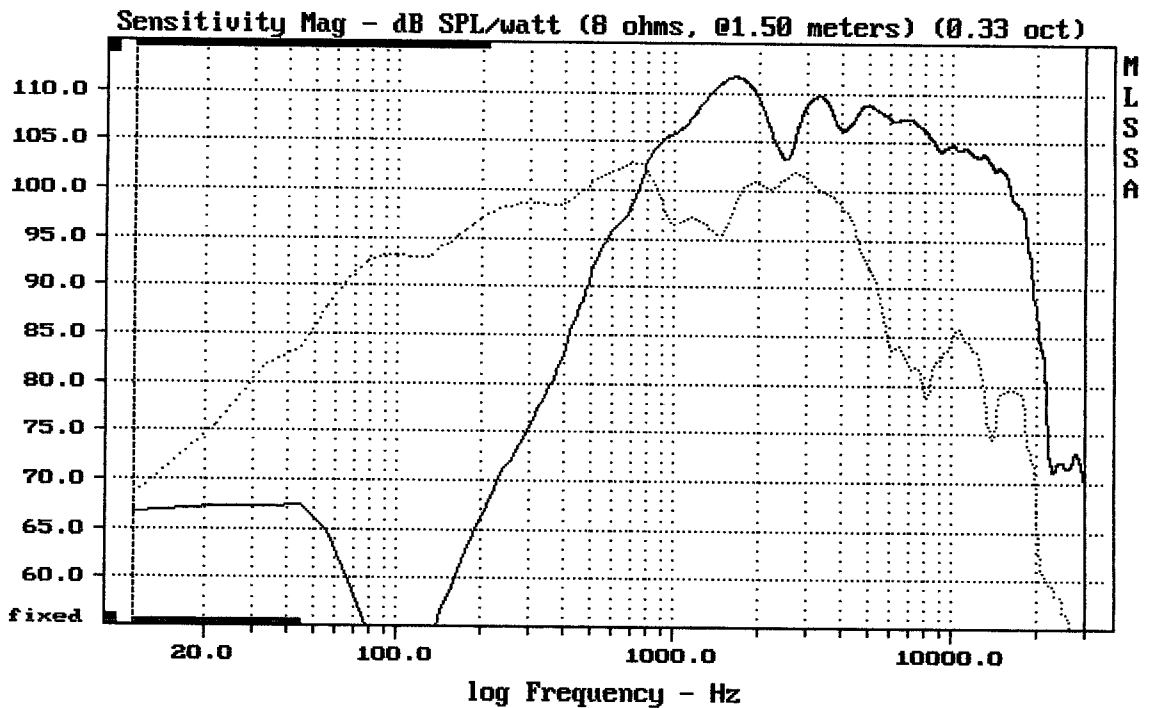

CURSOR: dy = -24.4787 x = 30007.1014 (2704)


CX15G251

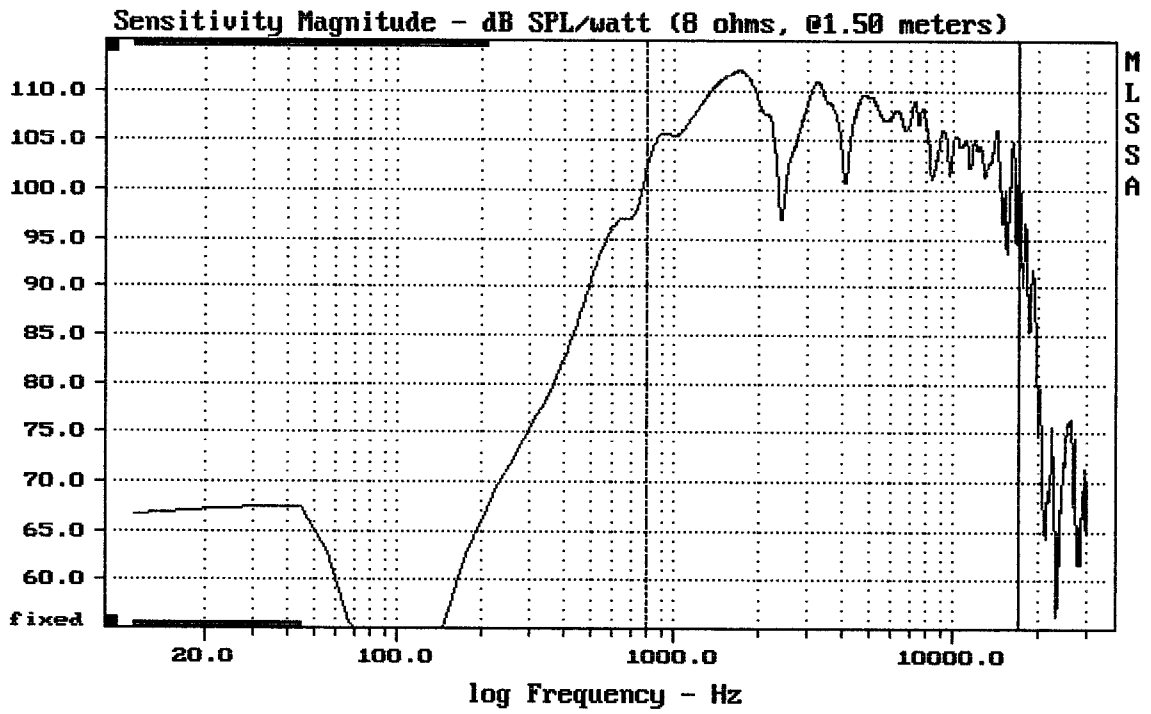


Level (799:17201 Hz) = 107.51 dB SPL/watt (8 ohms, @1.50 meters)

CX156251

MLSSA: Frequency Domain

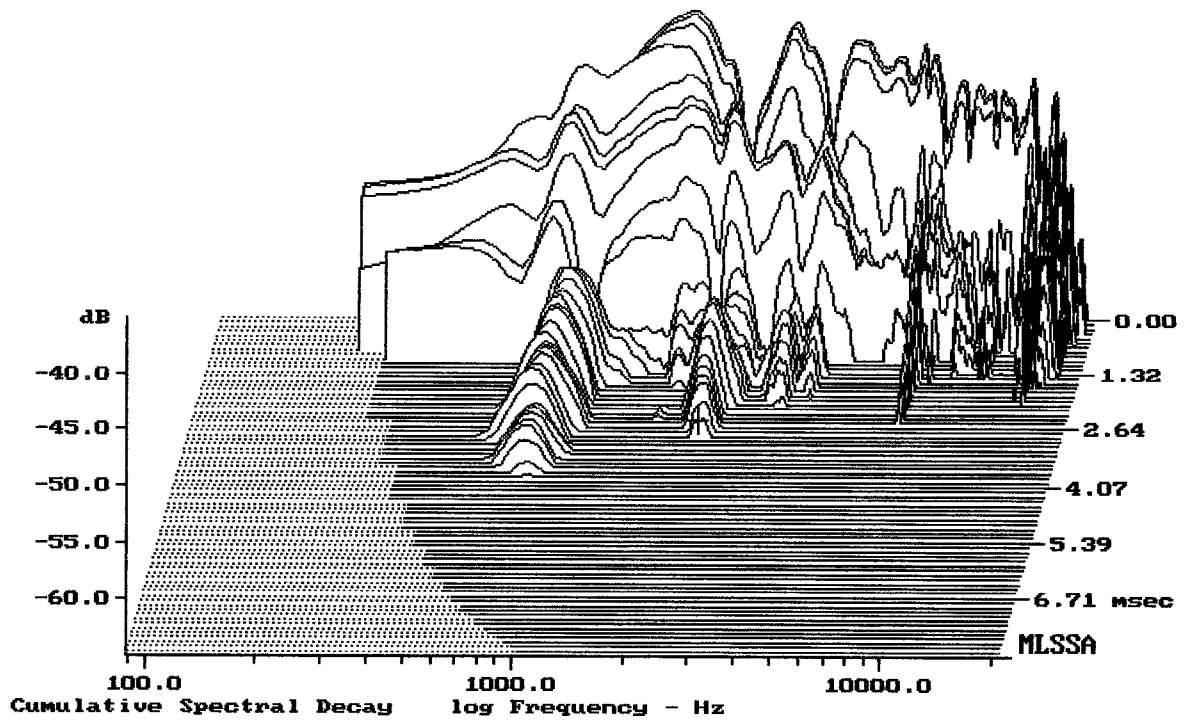


-63.53 dB, 2175 Hz (49), 2.860 msec (27)

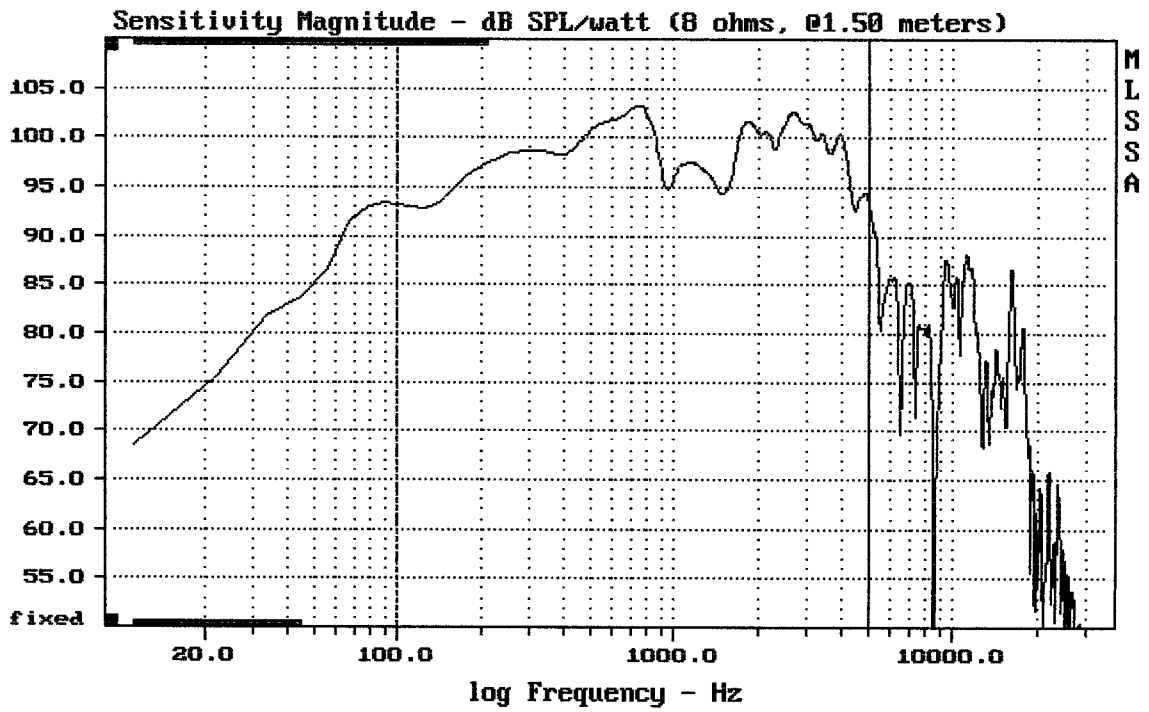

Level (100:5005 Hz) = 99.03 dB SPL/watt (8 ohms, @1.50 meters)

CX15G251

MLSSA: Frequency Domain

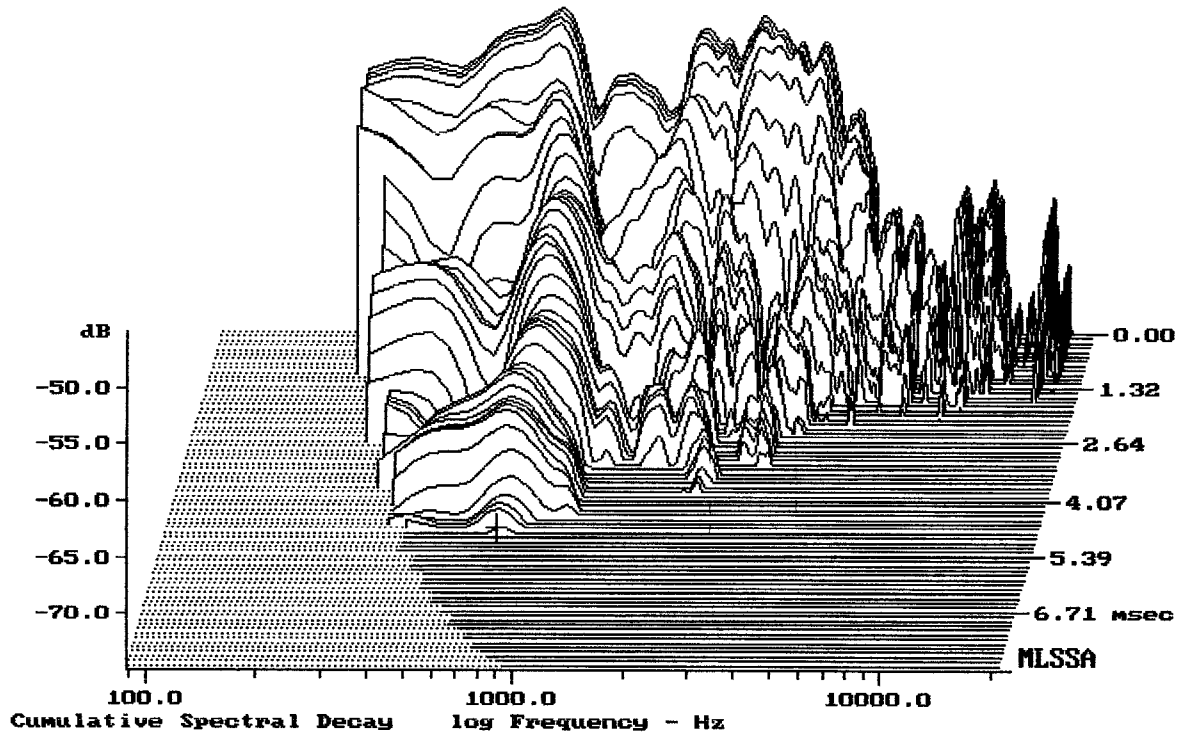

-74.60 dB, 710 Hz (16), 4.840 msec (45)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.51	Ohms
2	Fs	47.49	Hz
3	Re	5.24	Ohms[dc]
4	Res	94.58	Ohms
5	Qms	9.27	
6	Qes	0.51	
7	Qts	0.49	
8	L1	0.39	mH
9	L2	0.92	mH
10	R2	5.20	Ohms
11	RMSE-load	0.68	Ohms
12	Vas(Sd)	200.11	liters
13	Mms	55.61	grams
14	Cms	202	$\mu\text{M}/\text{Newton}$
15	B1	13.01	Tesla-M
16	SPLref(Sd)	98.0	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (40.00 grams)

Area (Sd): 840.00 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -21.1% (-20% to -50% is recommended).

CX15G251

MLSSA: Parameters

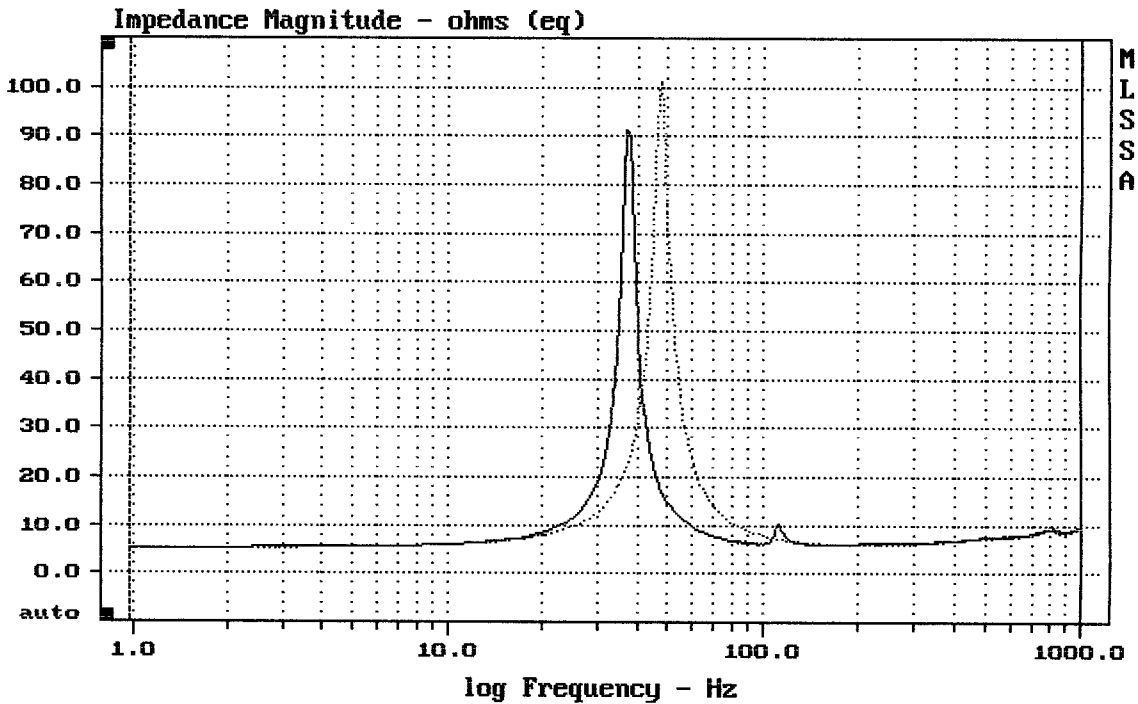

mean: 8.71, rms: 11.47, std: 7.461, max: 100.9, min: 5.249

MLSSA: Frequency Domain