


Level (100:2907 Hz) = 98.54 dB SPL/watt (8 ohms, @1.50 meters)

CIARE 15.00NdW FROM SEEBURG LINE AB SUB

MLSSA: Frequency Domain

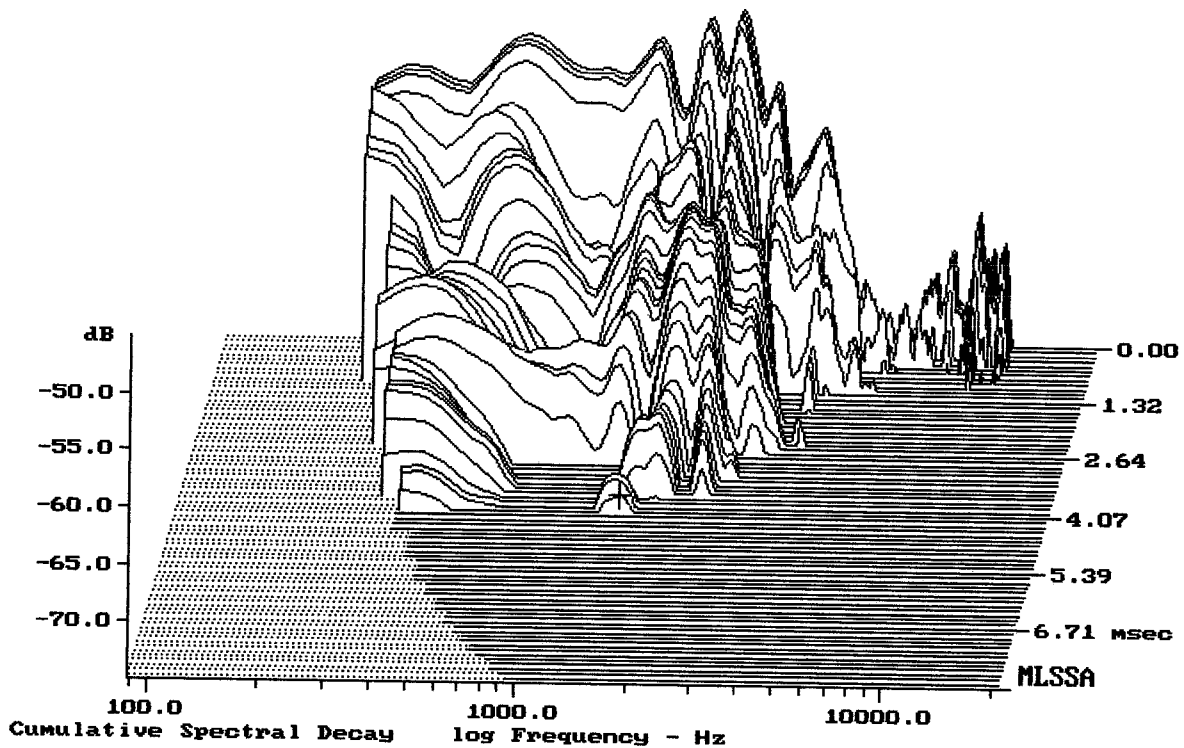

-73.53 dB, 1420 Hz (32), 4.070 msec (38)

Measured Data				QC Limits
Line	Parameter	Value	Units	
1	RMSE-free	1.15	Ohms	
2	Fs	45.65	Hz	
3	Re	5.58	Ohms[dc]	
4	Res	161.93	Ohms	
5	Qms	13.15		
6	Qes	0.45		
7	Qts	0.44		
8	L1	0.29	mH	
9	L2	1.03	mH	
10	R2	5.51	Ohms	
11	RMSE-load	0.63	Ohms	
12	Vas(Sd)	105.01	liters	
13	Mms	111.89	grams	
14	Cms	109	μ M/Newton	
15	B1	19.88	Tesla-M	
16	SPLref(Sd)	95.3	dB[Re]	
17	Rub-index	0.02		

Method: Mass-loaded (80.00 grams)

Area (Sd): 829.58 sq cm


DCR mode: Measure (-0.14 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -23.9% (-20% to -50% is recommended).

CIARE 15.00NdW FROM SEEBURG LINE A8 SUB

MLSSA: Parameters

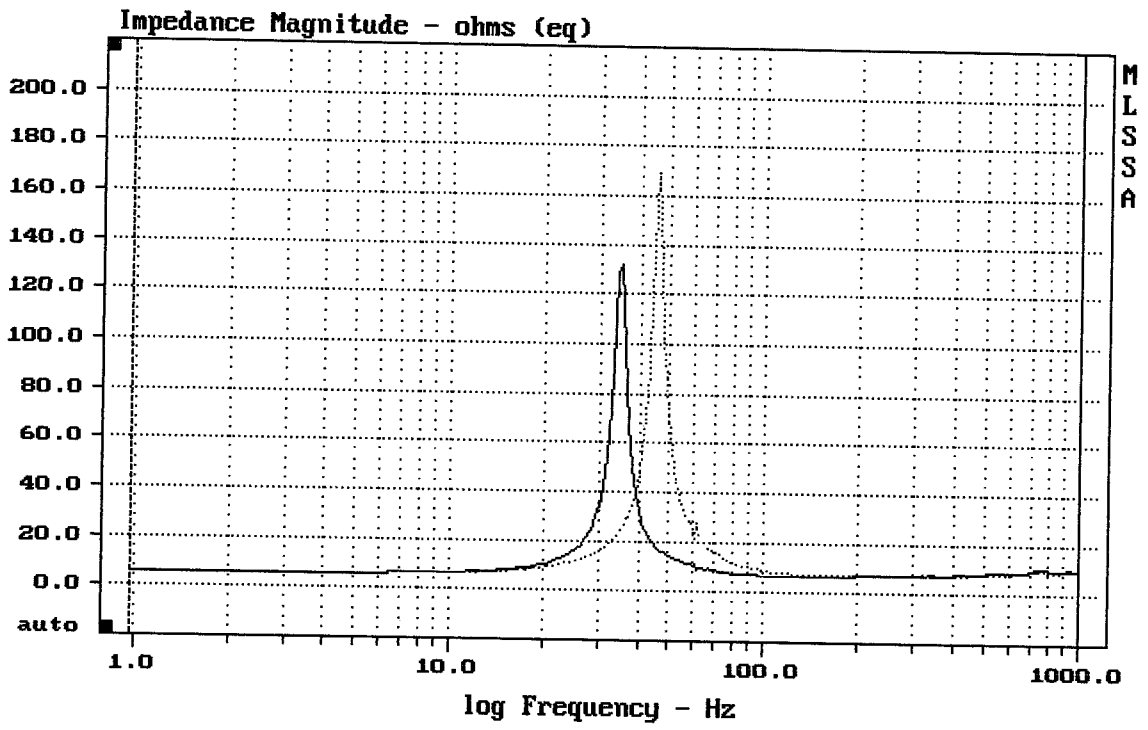

mean: 9.918, rms: 14.72, std: 10.88, max: 169.6, min: 5.722

MLSSA: Frequency Domain