


Level (67:2608 Hz) = 89.17 dB SPL/watt (8 ohms, @1.00 meters)

DAP AB-12

MLSSA: Frequency Domain

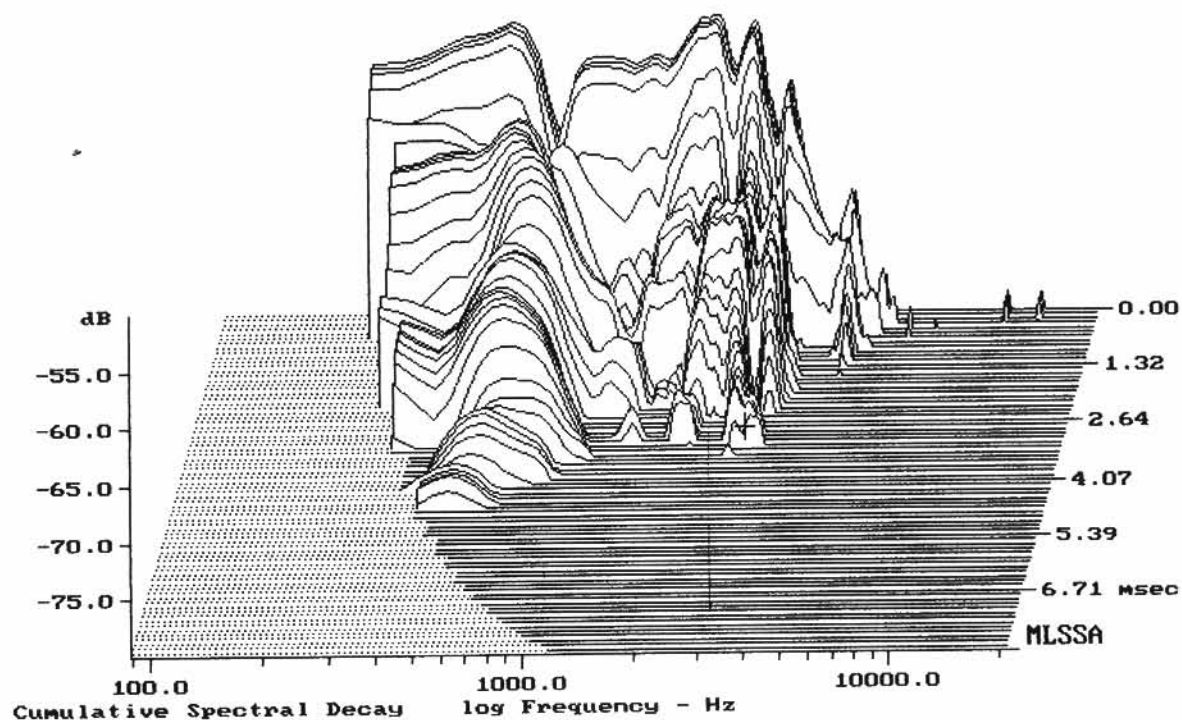

-78.36 dB, 2041 Hz (64), 3.190 msec (30)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.33	Ohms
2	Fs	59.30	Hz
3	Re	7.13	Ohms[dc]
4	Res	35.26	Ohms
5	Qms	6.10	
6	Qes	1.23	
7	Qts	1.03	
8	L1	0.92	mH
9	L2	1.21	mH
10	R2	5.76	Ohms
11	RMSE-load	0.87	Ohms
12	Vas(Sd)	54.56	liters
13	Mms	44.68	grams
14	Cms	161	$\mu\text{M}/\text{Newton}$
15	B1	9.81	Tesla-M
16	SPLref(Sd)	91.5	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 490.87 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -37.0% (-20% to -50% is recommended).

DAP AB-12

MLSSA: Parameters

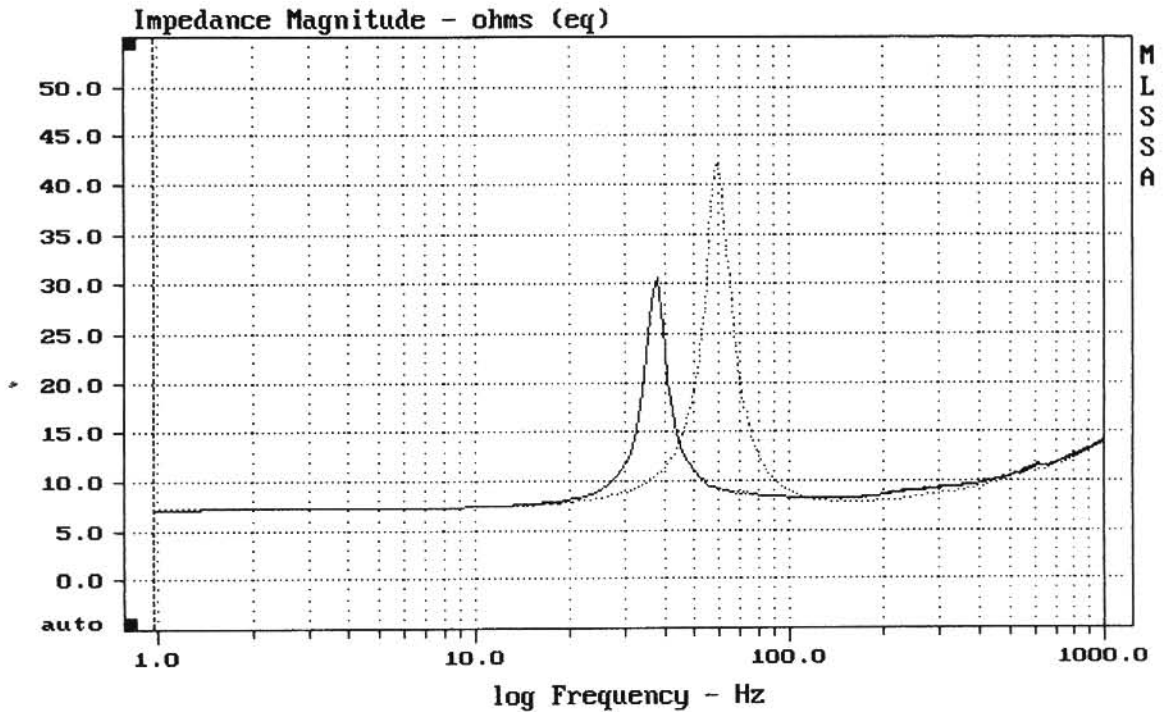

mean: 11.04, rms: 11.62, std: 3.617, max: 42.39, min: 7.182

DAP AB-12

MLSSA: Frequency Domain