

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.20	Ohms
2	Fs	45.12	Hz
3	Re	5.49	Ohms[dc]
4	Res	152.69	Ohms
5	Qms	6.39	
6	Qes	0.23	
7	Qts	0.22	
8	L1	0.59	mH
9	L2	1.45	mH
10	R2	6.84	Ohms
11	RMSE-load	0.49	Ohms
12	Vas(Sd)	151.62	liters
13	Mms	79.33	grams
14	Cms	157	$\mu\text{M}/\text{Newton}$
15	Bl	23.19	Tesla-M
16	SPLref(Sd)	99.7	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 829.58 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -29.0% (-20% to -50% is recommended).

D.A.S. 15-BN


MLSSA: Parameters

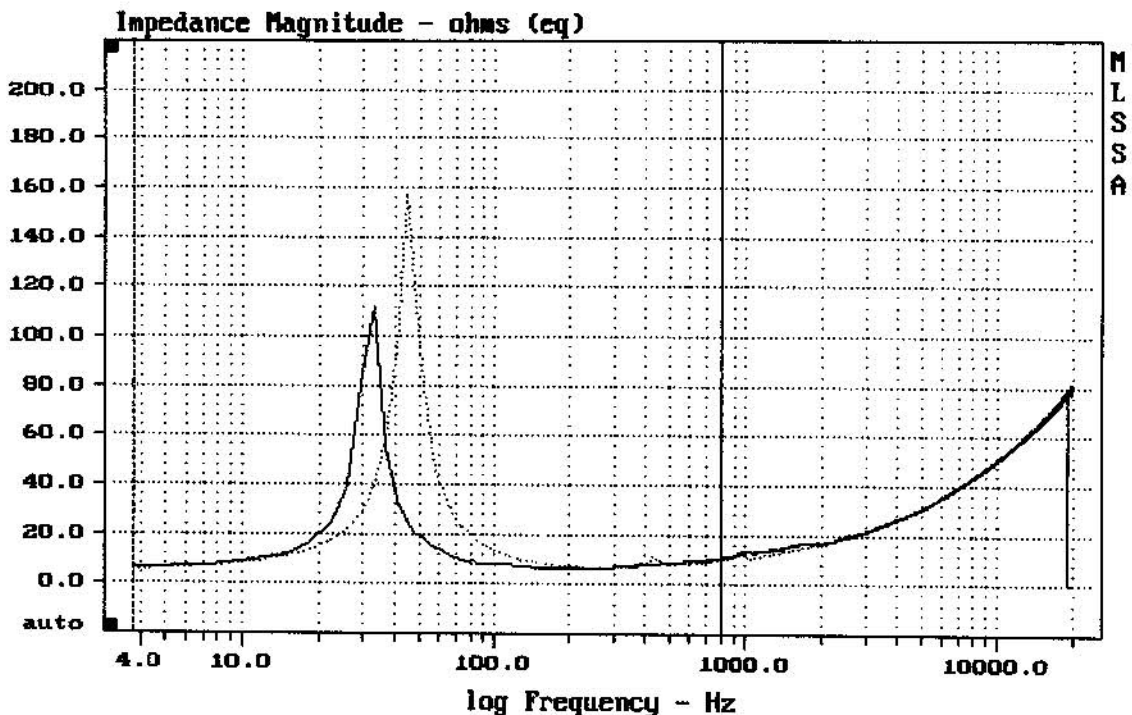

CURSOR: dy = -0.545185 x = 799.0057 (216)

DTTO


MLSSA: Frequency Domain

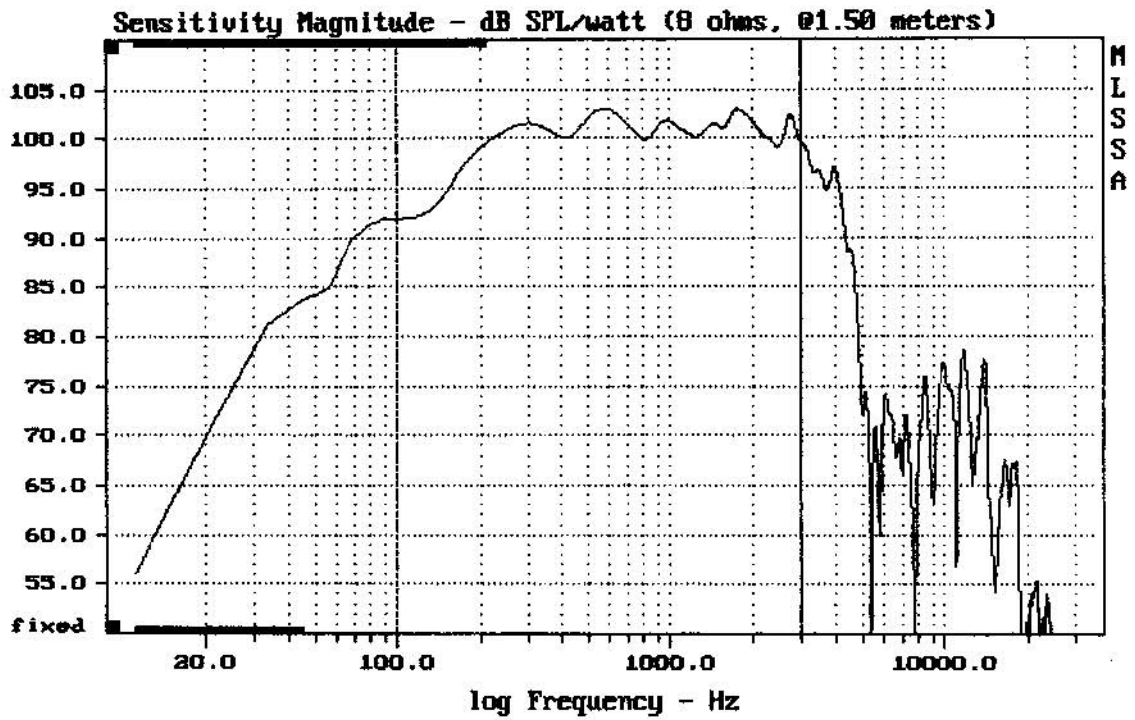

Level (100:2996 Hz) = 100.42 dB SPL/watt (8 ohms, @1.50 meters)

D.A.S. 15BN

MLSSA: Frequency Domain

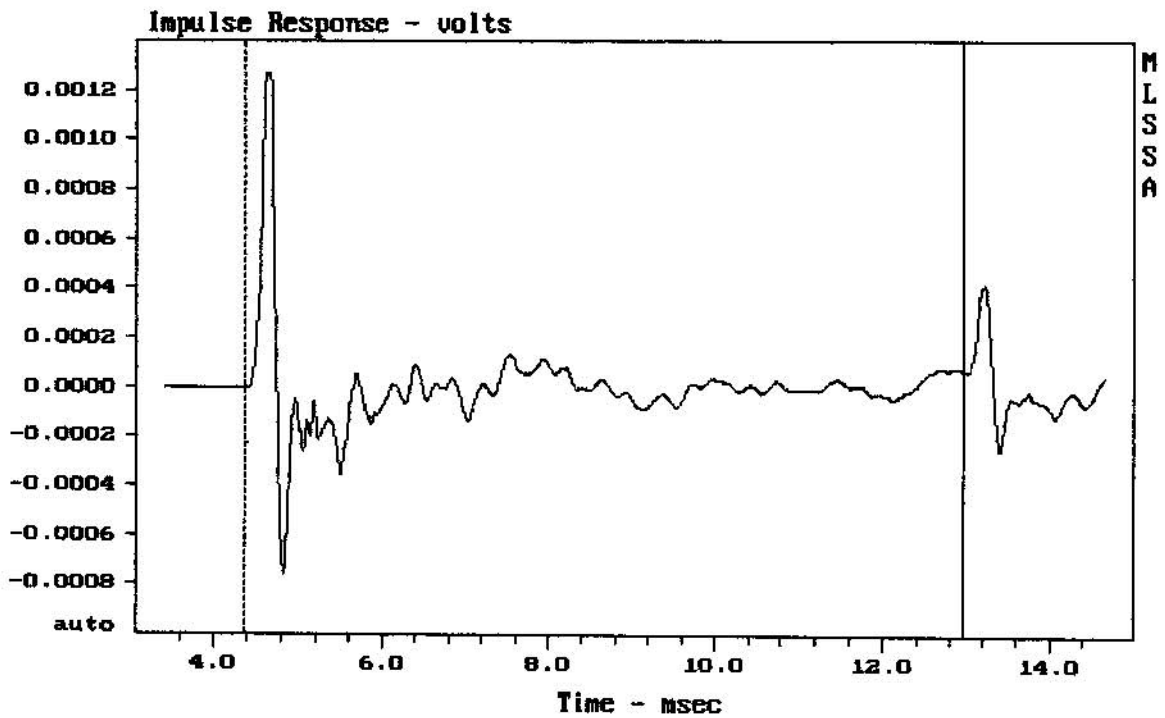

mean: 1.216e-007, rms: 0.000185, std: 0.000185, max: 0.001269, min: -0.0007546

D.A.S. 15BN