

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.86	Ohms
2	Fs	41.16	Hz
3	Re	5.98	Ohms[dc]
4	Res	159.98	Ohms
5	Qms	7.34	
6	Qes	0.27	
7	Qts	0.26	
8	L1	1.20	mH
9	L2	1.63	mH
10	R2	5.68	Ohms
11	RMSE-load	0.53	Ohms
12	Vas(Sd)	123.70	liters
13	Mms	116.84	grams
14	Cms	128	$\mu\text{M}/\text{Newton}$
15	B1	25.67	Tesla-M
16	SPLref(Sd)	96.8	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 829.58 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -24.9% (-20% to -50% is recommended).

D.A.S. 15-GN


MLSSA: Parameter:

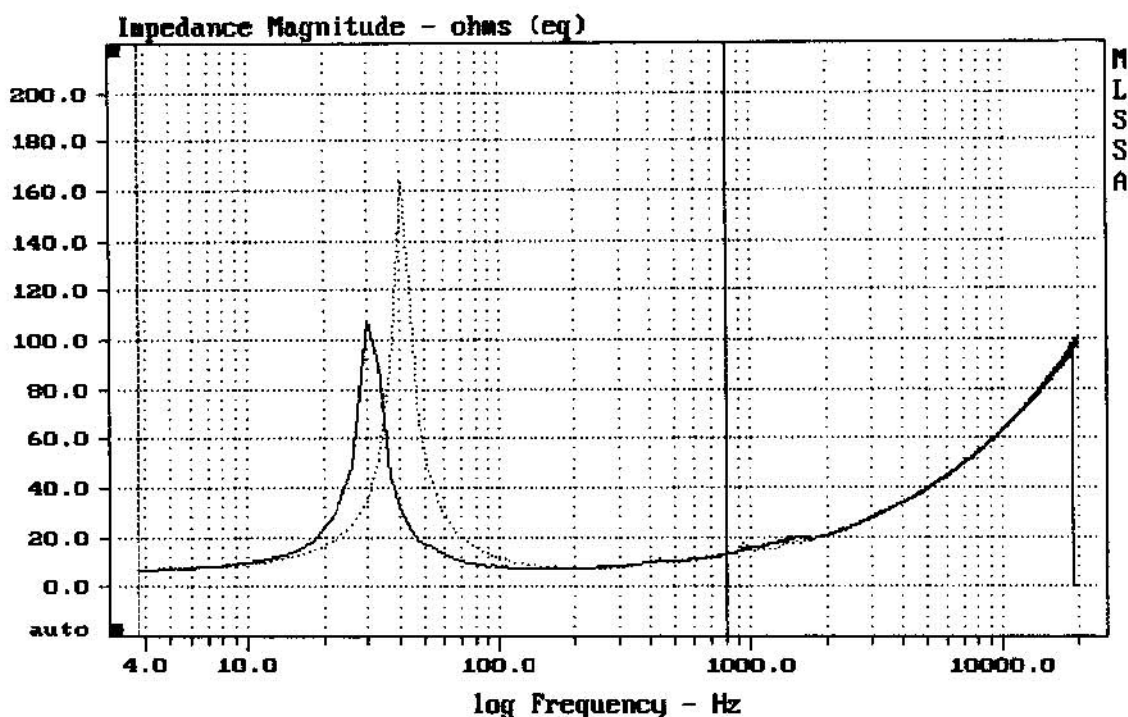

CURSOR: dy = -0.0118246 x = 799.8857 (216)

DTTO


MLSSA: Frequency Domain

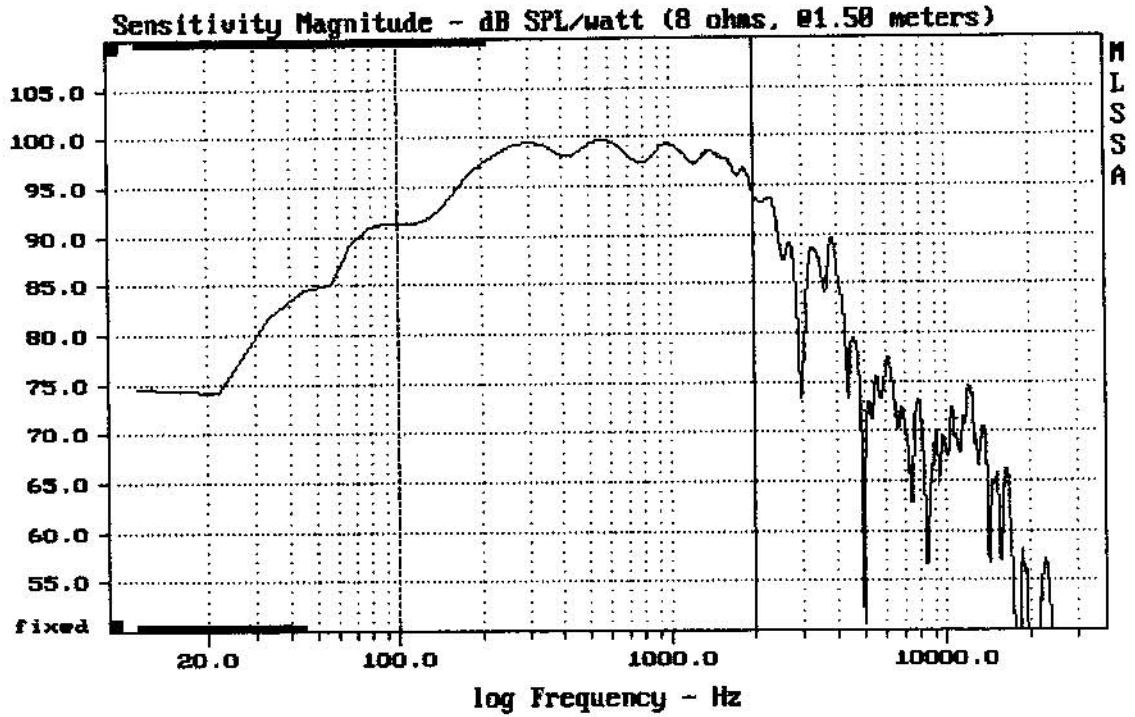

Level (100:1998 Hz) = 97.68 dB SPL/watt (8 ohms, @1.50 meters)

D.A.S. 15GN

MLSSA: Frequency Domain

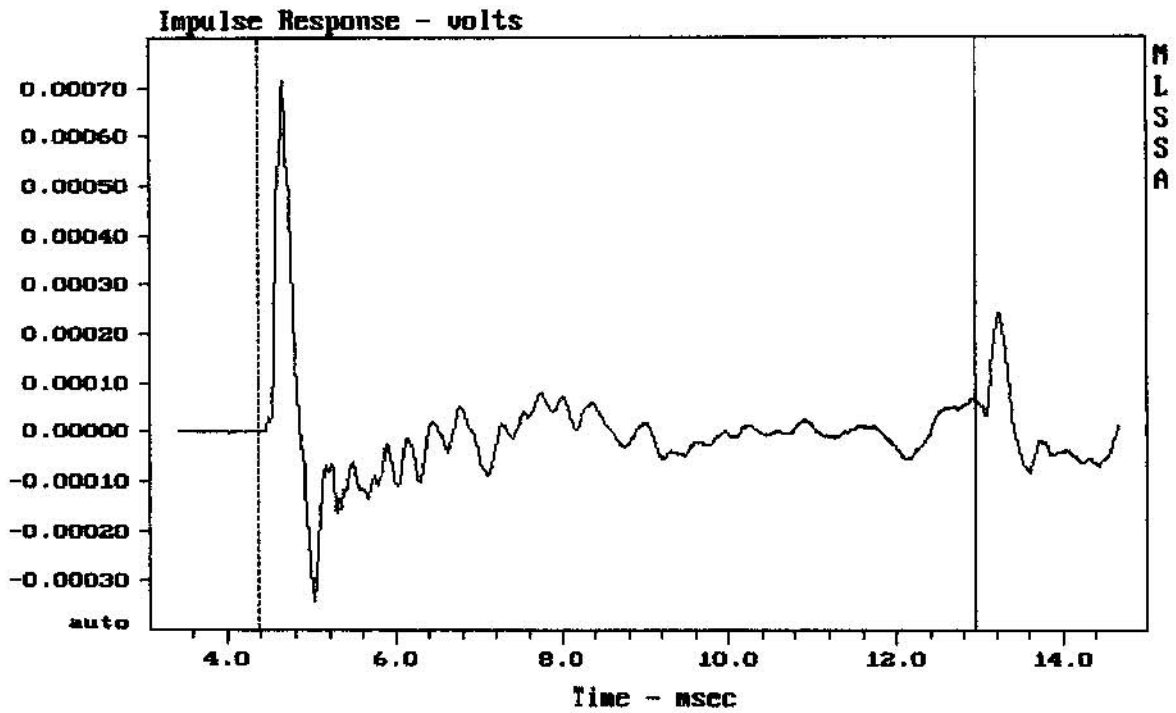

CURSOR: y = 6.31721e-005 x = 12.9588 (1178)

D.A.S. 15GN