


Level (100:5005 Hz) = 97.74 dB SPL/watt (8 ohms, @1.50 meters)

DAS15L

MLSSA: Frequency Domain

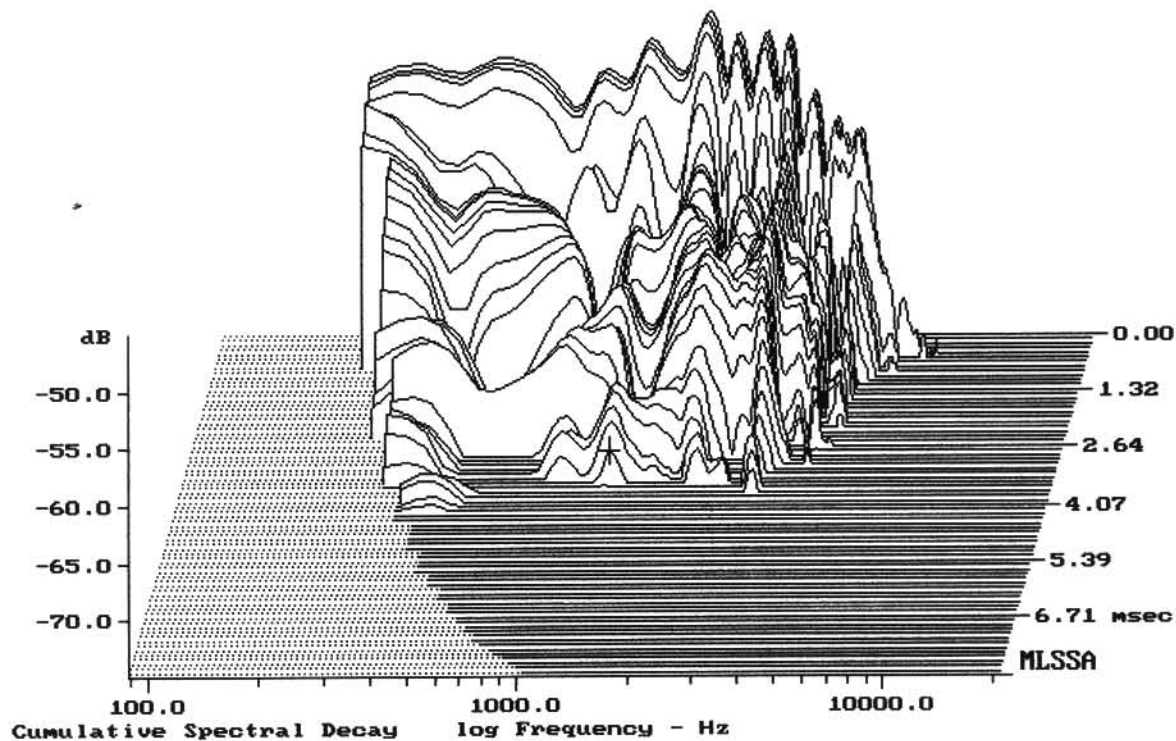

-72.20 dB, 1287 Hz (29), 3.520 msec (33)

## Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.52	Ohms
2	Fs	37.12	Hz
3	Re	6.21	Ohms[dc]
4	Res	64.63	Ohms
5	Qms	4.79	
6	Qes	0.46	
7	Qts	0.42	
8	L1	0.80	mH
9	L2	0.93	mH
10	R2	3.87	Ohms
11	RMSE-load	0.44	Ohms
12	Vas(Sd)	240.13	liters
13	Mms	78.65	grams
14	Cms	234	$\mu\text{M}/\text{Newton}$
15	Bl	15.73	Tesla-M
16	SPLref(Sd)	96.1	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -30.4% (-20% to -50% is recommended).

DAS15L

MLSSA: Parameters

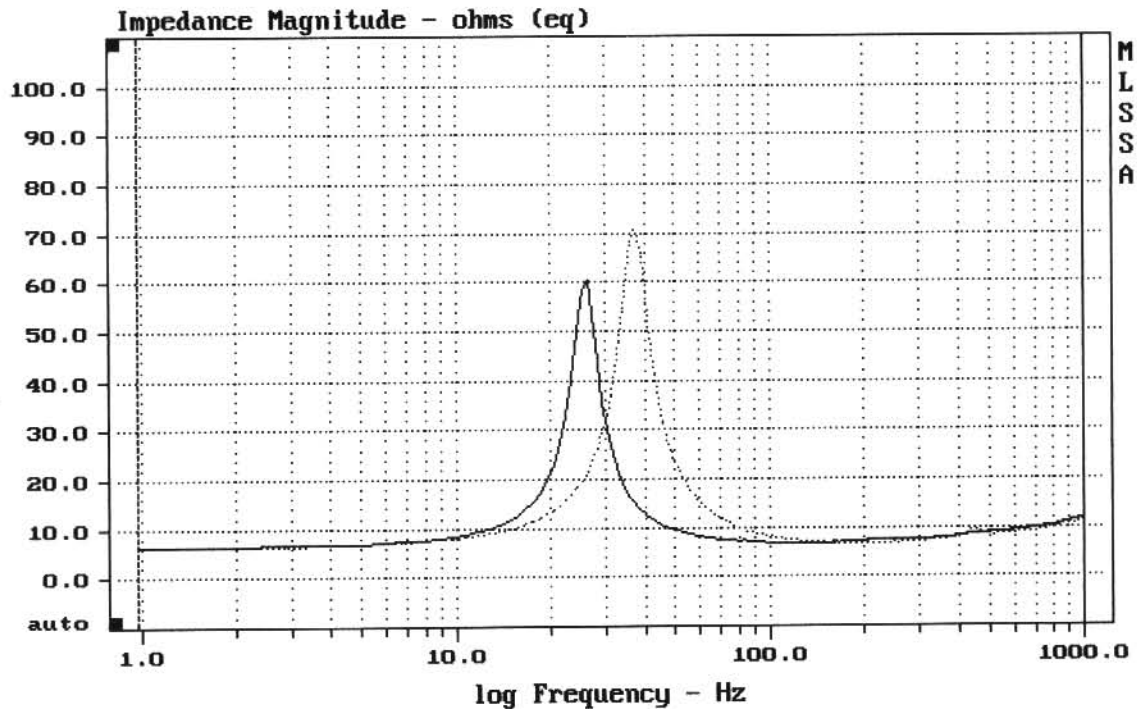


---

mean: 9.814, rms: 11.49, std: 5.969, max: 70.57, min: 6.337

---

DTTO

MLSSA: Frequency Domain