

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.08	Ohms
2	Fs	38.95	Hz
3	Re	5.99	Ohms[dc]
4	Res	137.21	Ohms
5	Qms	7.55	
6	Qes	0.33	
7	Qts	0.32	
8	L1	0.81	mH
9	L2	1.73	mH
10	R2	10.60	Ohms
11	RMSE-load	1.18	Ohms
12	Vas(Sd)	222.49	liters
13	Mms	135.54	grams
14	Cms	123	$\mu\text{M}/\text{Newton}$
15	B1	24.56	Tesla-M
16	SPLref(Sd)	97.8	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 1134.11 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -20.6% (-20% to -50% is recommended).

D.A.S. 18GN


MLSSA: Parameters

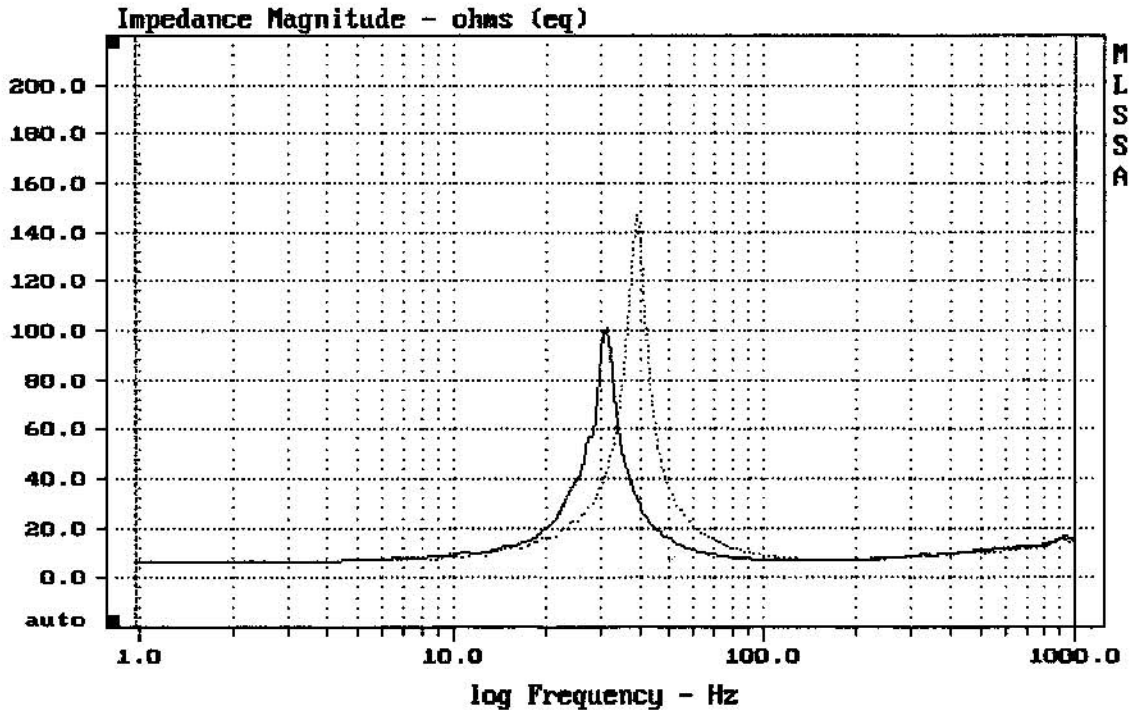

CURSOR: dy = -1.89227 x = 1000.9766 (1025)

DTTO


MLSSA: Frequency Domain

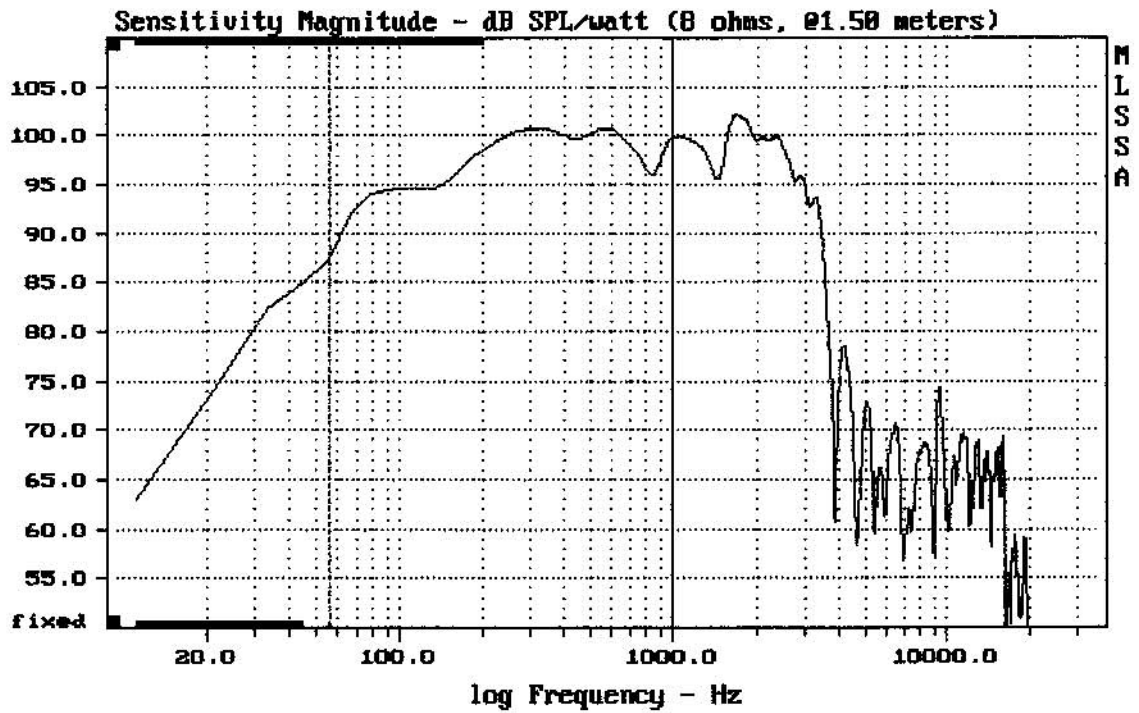

Level (55:999 Hz) = 98.03 dB SPL/watt (8 ohms, @1.50 meters)

D.A.S. 18GN

MLSSA: Frequency Domain

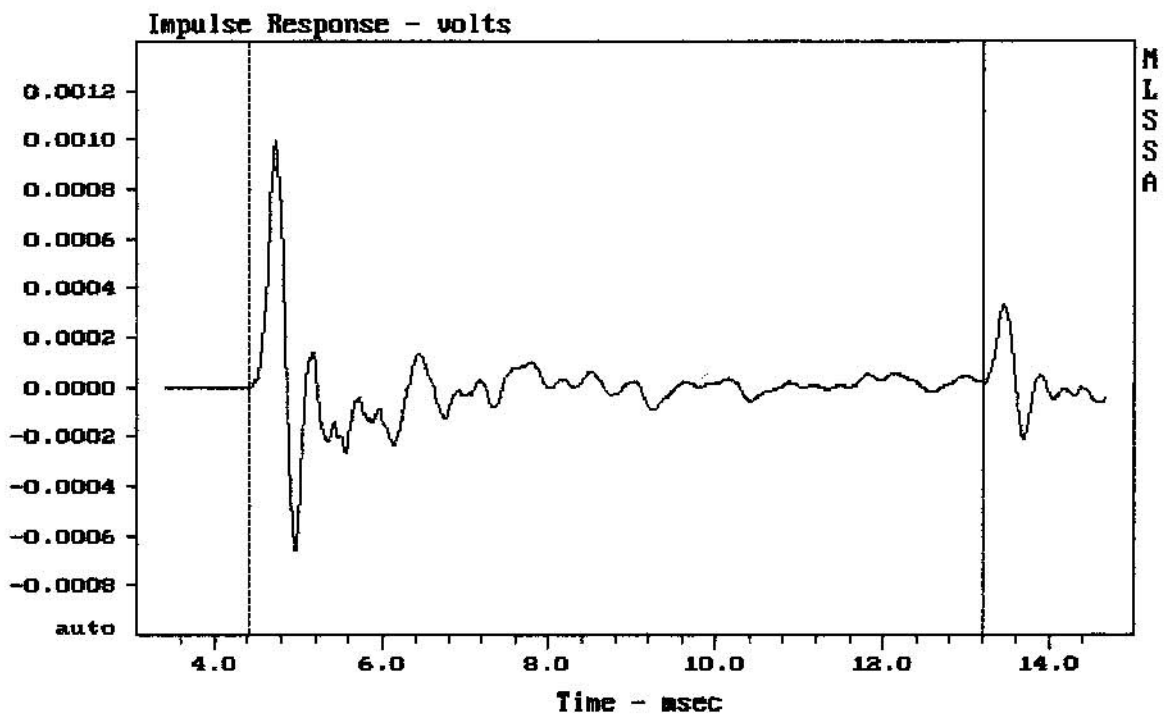

mean: 3.055e-007, rms: 0.0001577, std: 0.0001577, max: 0.000995, min: -0.00065

D.A.S. 18GN