


Level (100:2600 Hz) = 93.94 dB SPL/watt (4 ohms, @1.50 meters)

DELTA 15LF/4

MLSSA: Frequency Domain

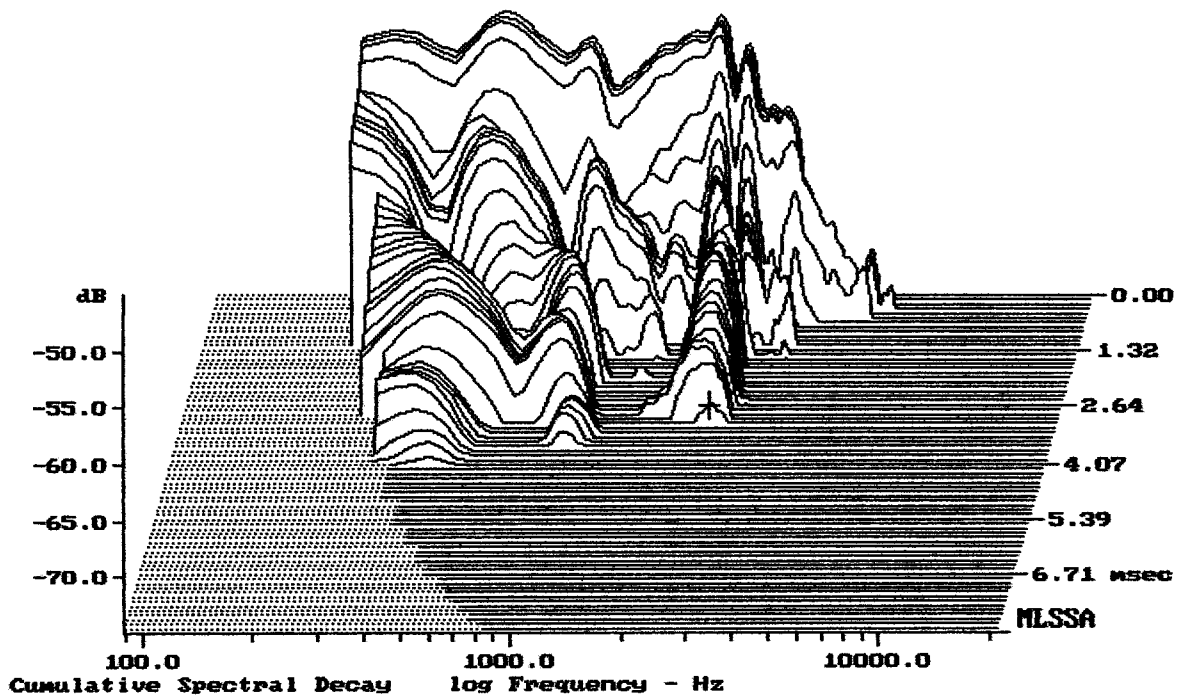

-73.48 dB, 2397 Hz (54), 3.000 msec (29)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.26	Ohms
2	Fs	38.74	Hz
3	Re	3.19	Ohms[dc]
4	Res	84.04	Ohms
5	Qms	12.69	
6	Qes	0.48	
7	Qts	0.46	
8	L1	0.87	mH
9	L2	1.22	mH
10	R2	3.86	Ohms
11	RMSE-load	0.27	Ohms
12	Vas(Sd)	241.05	liters
13	Mms	71.94	grams
14	Cms	235	$\mu\text{M}/\text{Newton}$
15	B1	10.77	Tesla-M
16	SPLref(Sd)	96.5	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.12 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -30.3% (-20% to -50% is recommended).

DELTA15LF/4

MLSSA: Parameters

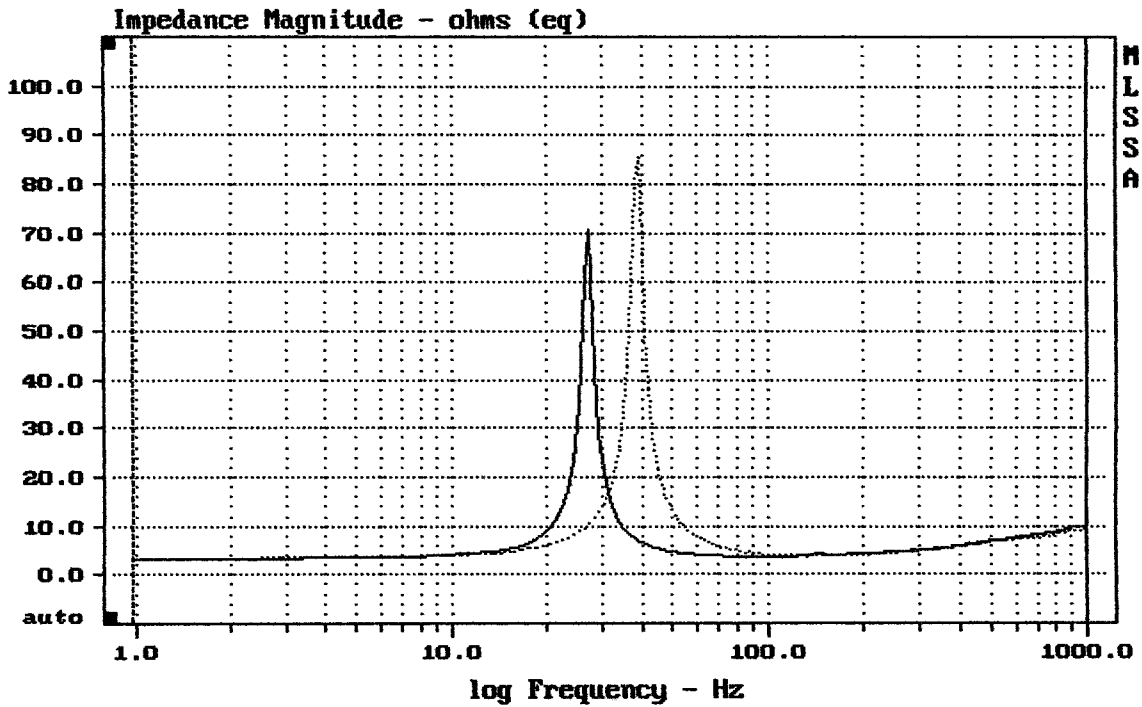

mean: 7.267, rms: 8.973, std: 5.264, max: 85.42, min: 3.265

DELTA 15LF/4

MLSSA: Frequency Domain