


Level (67:2188 Hz) = 97.97 dB SPL/watt (4 ohms, @1.50 meters)

EMINENCE BASSLITE C2515 - 40hm

MLSSA: Frequency Domain

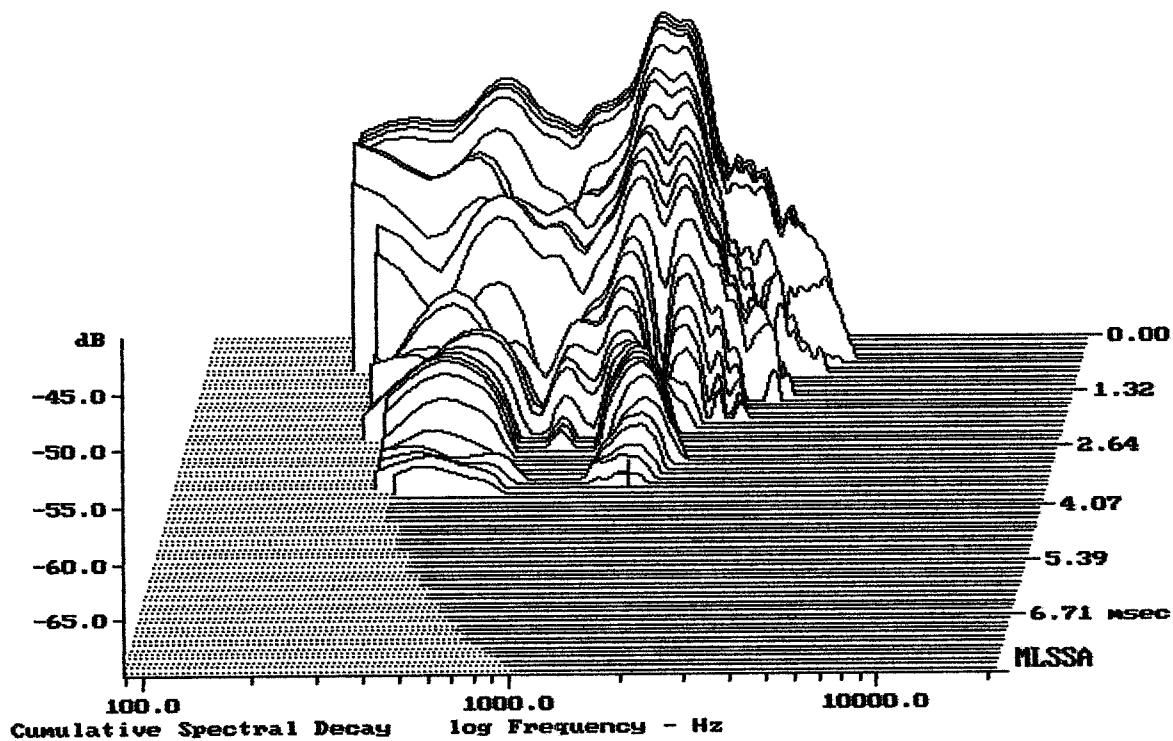

-69.18 dB, 1509 Hz (34), 3.520 msec (33)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.30	Ohms
2	Fs	44.25	Hz
3	Re	3.69	Ohms[dc]
4	Res	75.33	Ohms
5	Qms	13.38	
6	Qes	0.66	
7	Qts	0.62	
8	L1	0.42	mH
9	L2	0.62	mH
10	R2	4.02	Ohms
11	RMSE-load	0.20	Ohms
12	Vas(Sd)	162.82	liters
13	Mms	81.64	grams
14	Cms	158	$\mu\text{M}/\text{Newton}$
15	B1	11.30	Tesla-M
16	SPLref(Sd)	95.2	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -28.4% (-20% to -50% is recommended).

EMINENCE BASSLITE C2515

MLSSA: Parameters

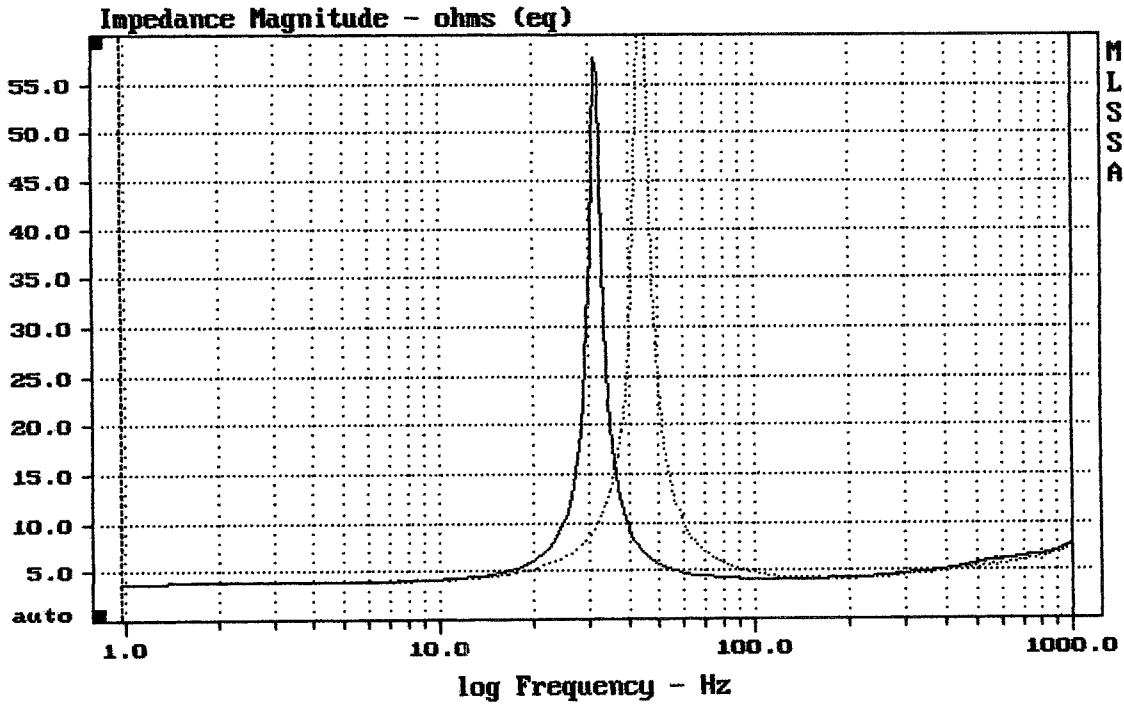

mean: 6.166, rms: 7.854, std: 4.864, max: 77.75, min: 3.769

MLSSA: Frequency Domain