


Level (100:4705 Hz) = 98.10 dB SPL/watt (16 ohms, @1.00 meters)

EMINENCE BETA 12B

MLSSA: Frequency Domain

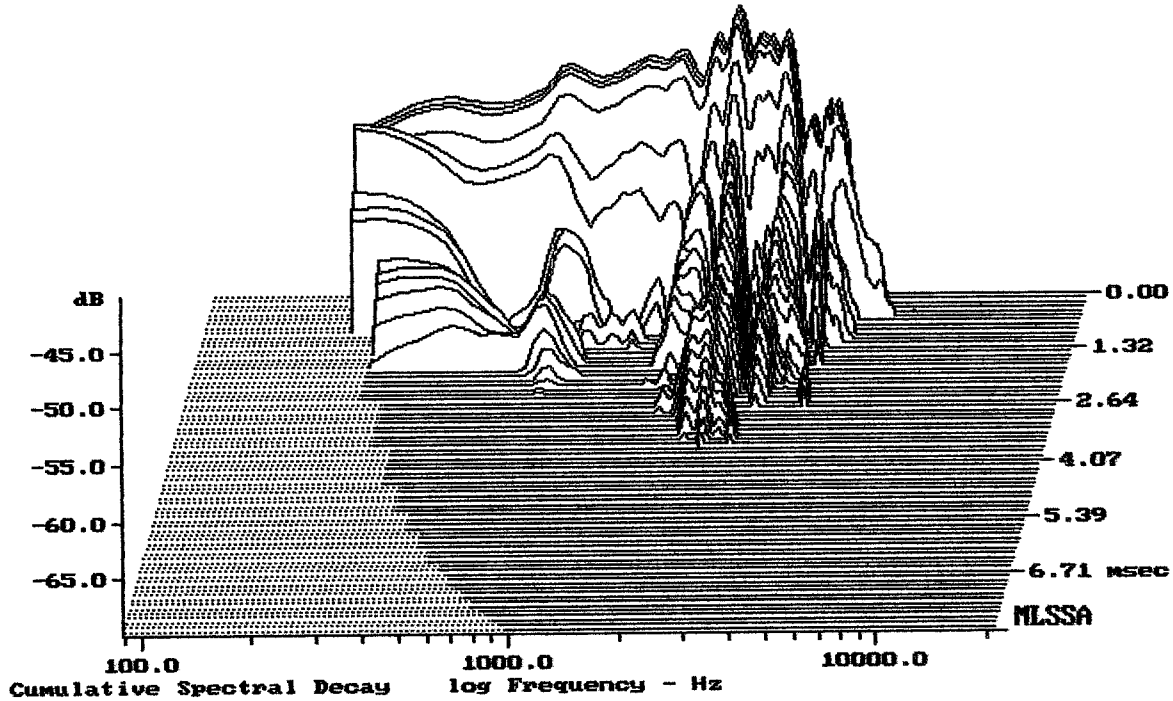

-69.12 dB, 2397 Hz (54), 3.630 msec (34)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.39	Ohms
2	Fs	52.54	Hz
3	Re	9.79	Ohms[dc]
4	Res	126.32	Ohms
5	Qms	8.78	
6	Qes	0.68	
7	Qts	0.63	
8	L1	1.22	mH
9	L2	1.59	mH
10	R2	6.35	Ohms
11	RMSE-load	0.46	Ohms
12	Vas(Sd)	96.86	liters
13	Mms	40.48	grams
14	Cms	227	$\mu\text{M}/\text{Newton}$
15	B1	13.87	Tesla-M
16	SPLref(Sd)	95.0	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (40.00 grams)

Area (Sd): 551.55 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -28.9% (-20% to -50% is recommended).

EMINENCE BETA 12B

MLSSA: Parameters

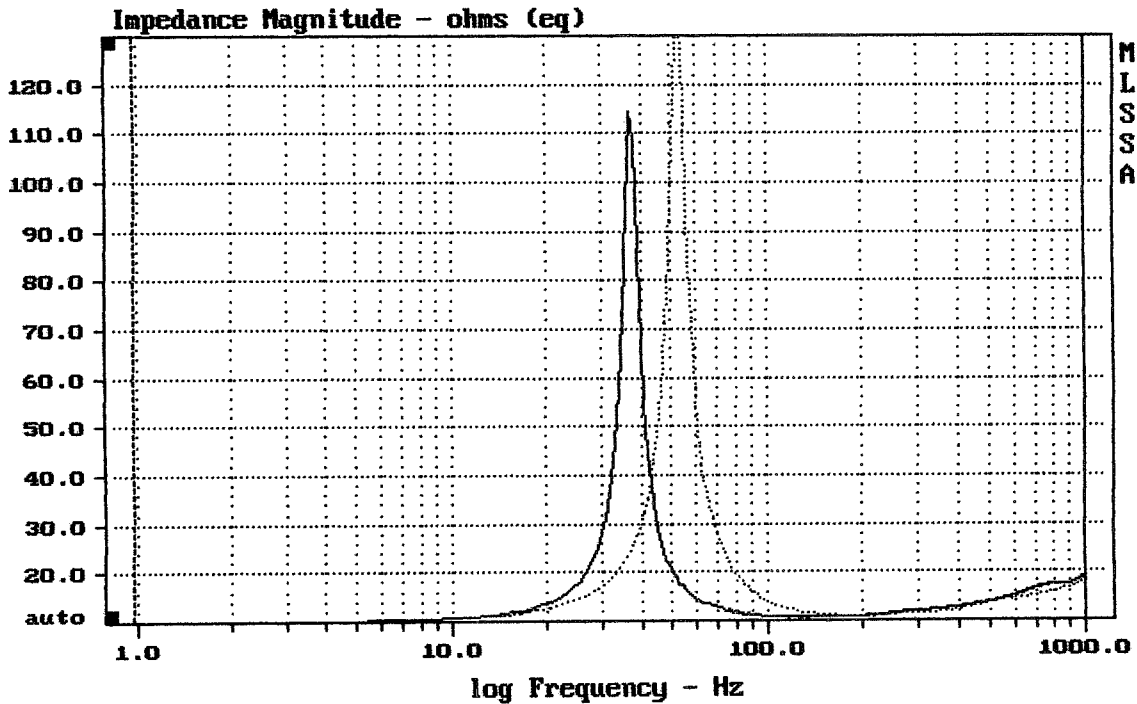

mean: 15.67, rms: 18.85, std: 18.48, max: 136.6, min: 9.89

MLSSA: Frequency Domain