


Level (100:4506 Hz) = 96.86 dB SPL/watt (4 ohms, @1.00 meters)

EMINENCE BETA12C

MLSSA: Frequency Domain

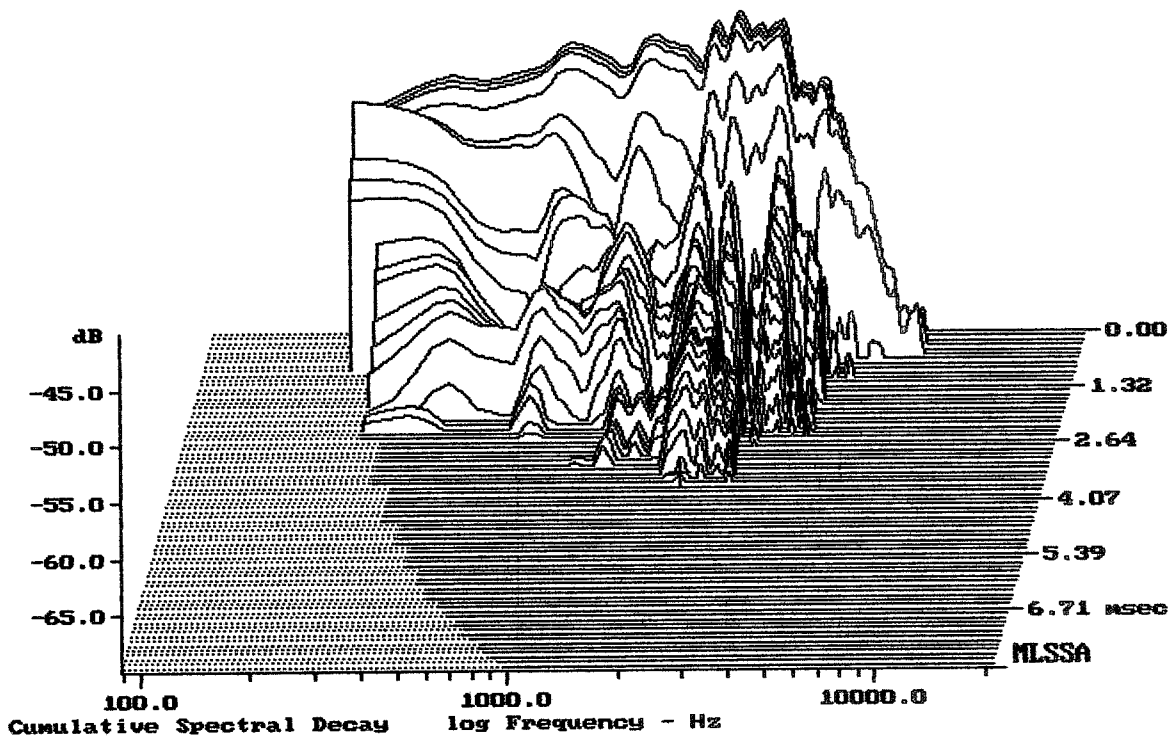

-69.08 dB, 2131 Hz (48), 3.630 msec (34)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.18	Ohms
2	Fs	52.46	Hz
3	Re	3.77	Ohms[dc]
4	Res	32.06	Ohms
5	Qms	4.60	
6	Qes	0.54	
7	Qts	0.48	
8	L1	0.42	mH
9	L2	0.61	mH
10	R2	3.56	Ohms
11	RMSE-load	0.20	Ohms
12	Vas(Sd)	102.44	liters
13	Mms	35.58	grams
14	Cms	259	μ M/Newton
15	B1	9.04	Tesla-M
16	SPLref(Sd)	96.2	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (40.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -32.0% (-20% to -50% is recommended).

EMINENCE BETA12C

MLSSA: Parameters

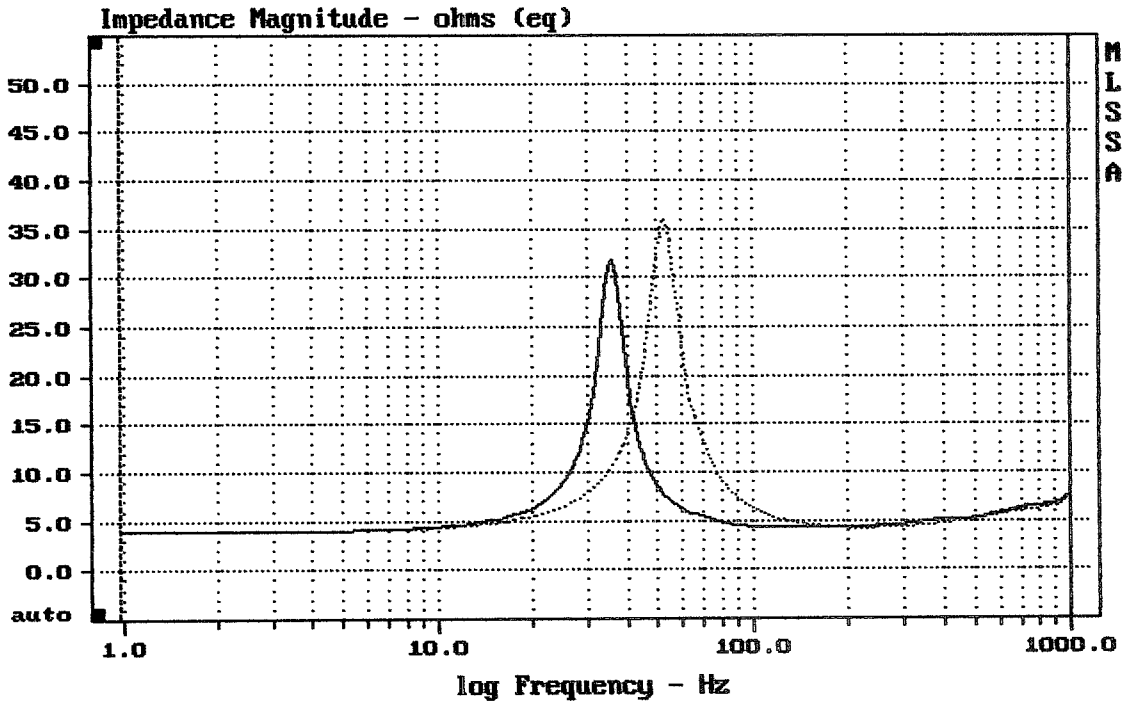

mean: 6.15, rms: 7.869, std: 3.486, max: 35.93, min: 3.878

MLSSA: Frequency Domain