


Level (100:12507 Hz) = 96.88 dB SPL/watt (16 ohms, @1.00 meters)

EMINENCE BETA 12LTB

MLSSA: Frequency Domain

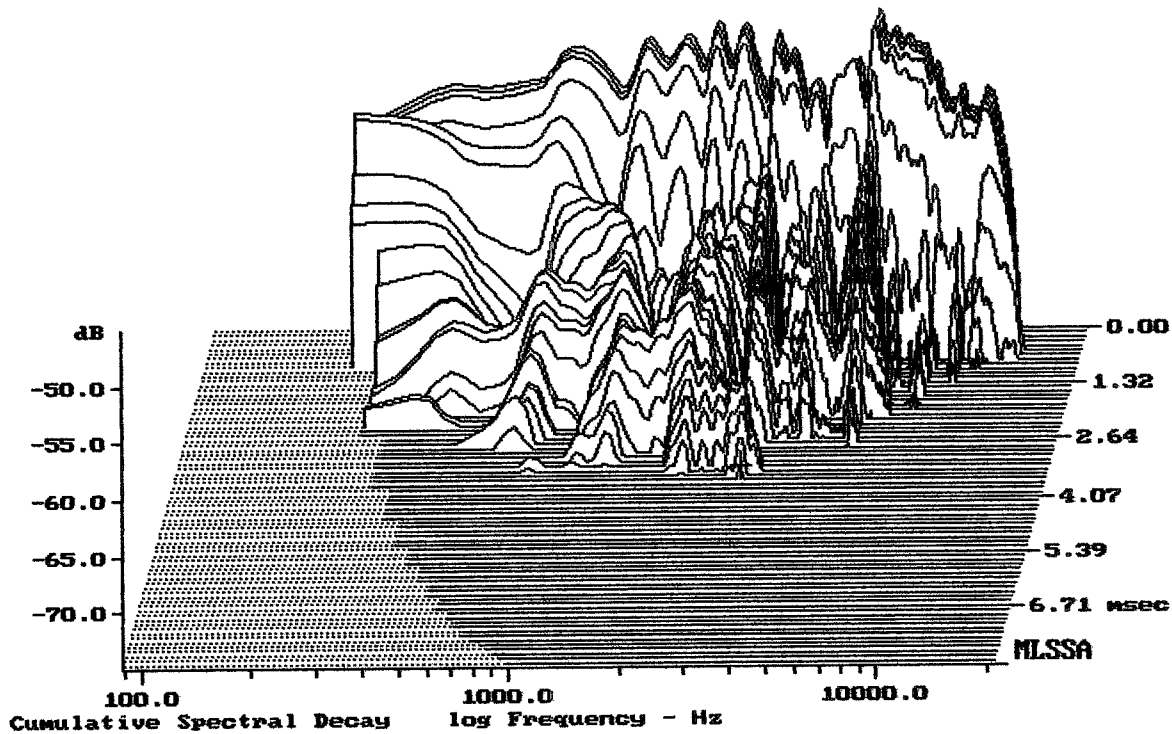

-73.67 dB, 3187 Hz (70), 3.630 msec (34)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.43	Ohms
2	Fs	55.96	Hz
3	Re	14.89	Ohms[dc]
4	Res	119.82	Ohms
5	Qms	6.33	
6	Qes	0.79	
7	Qts	0.70	
8	L1	1.07	mH
9	L2	1.74	mH
10	R2	8.30	Ohms
11	RMSE-load	0.49	Ohms
12	Vas(Sd)	94.68	liters
13	Mms	36.51	grams
14	Cms	222	$\mu\text{M}/\text{Newton}$
15	B1	15.59	Tesla-M
16	SPLref(Sd)	95.1	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (40.00 grams)

Area (Sd): 551.55 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -30.6% (-20% to -50% is recommended).

EMINENCE BETA 12LTB

MLSSA: Parameters

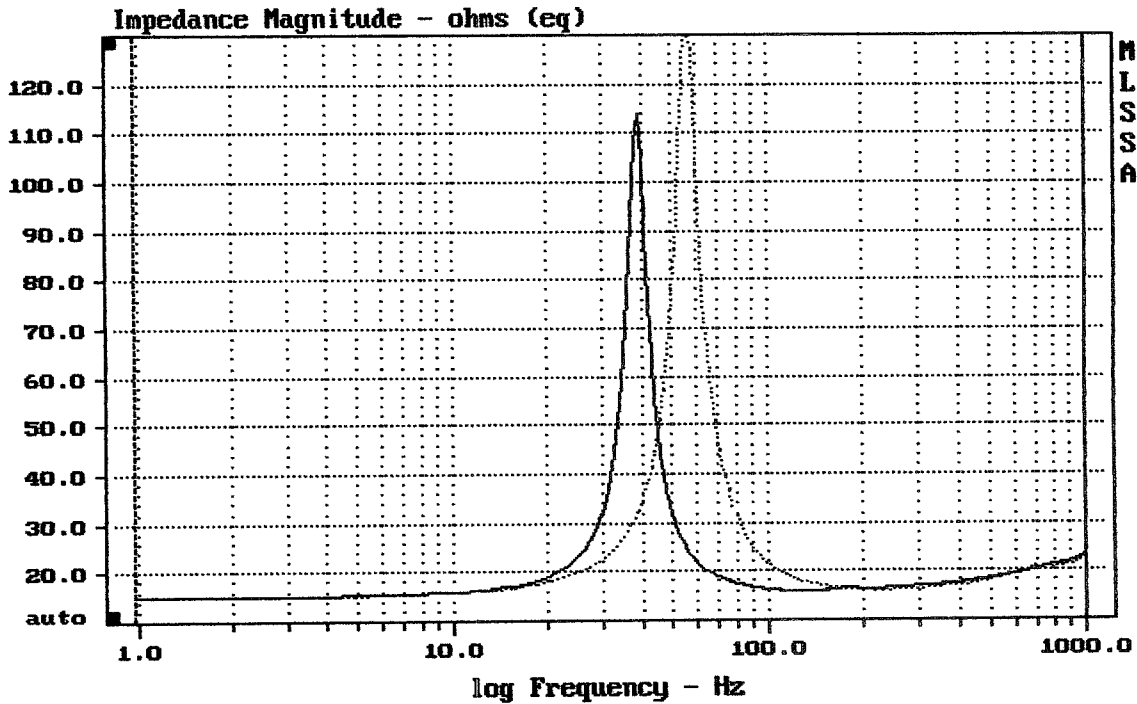

mean: 21.08, rms: 24.1, std: 11.68, max: 135.7, min: 15.02

MLSSA: Frequency Domain