


Level (100:5205 Hz) = 98.34 dB SPL/watt (16 ohms, @1.00 meters)

EMINENCE DELTA 12B

MLSSA: Frequency Domain

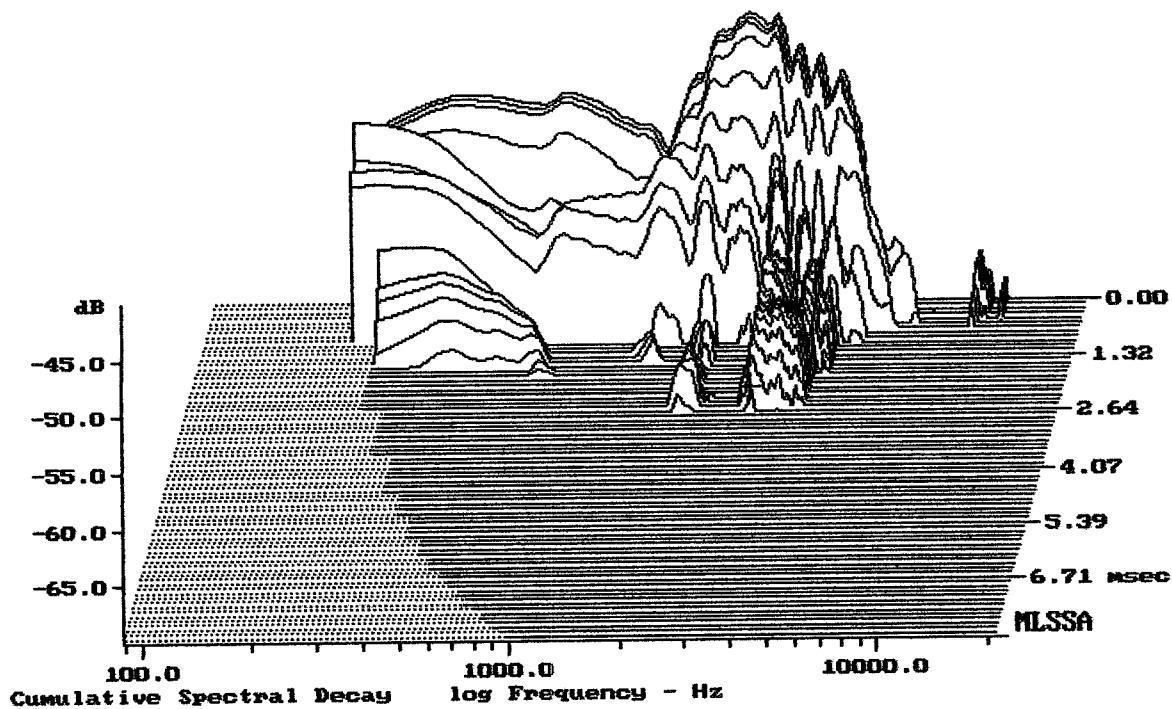

-67.93 dB, 3063 Hz (69), 2.640 msec (25)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.47	Ohms
2	Fs	52.16	Hz
3	Re	11.51	Ohms[dc]
4	Res	139.80	Ohms
5	Qms	5.30	
6	Qes	0.44	
7	Qts	0.40	
8	L1	1.20	mH
9	L2	1.93	mH
10	R2	6.79	Ohms
11	RMSE-load	0.66	Ohms
12	Vas(Sd)	99.42	liters
13	Mms	37.08	grams
14	Cms	251	$\mu\text{M}/\text{Newton}$
15	B1	17.90	Tesla-M
16	SPLref(Sd)	96.9	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (40.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -30.1% (-20% to -50% is recommended).

EMINENCE DELTA 12B

MLSSA: Parameters

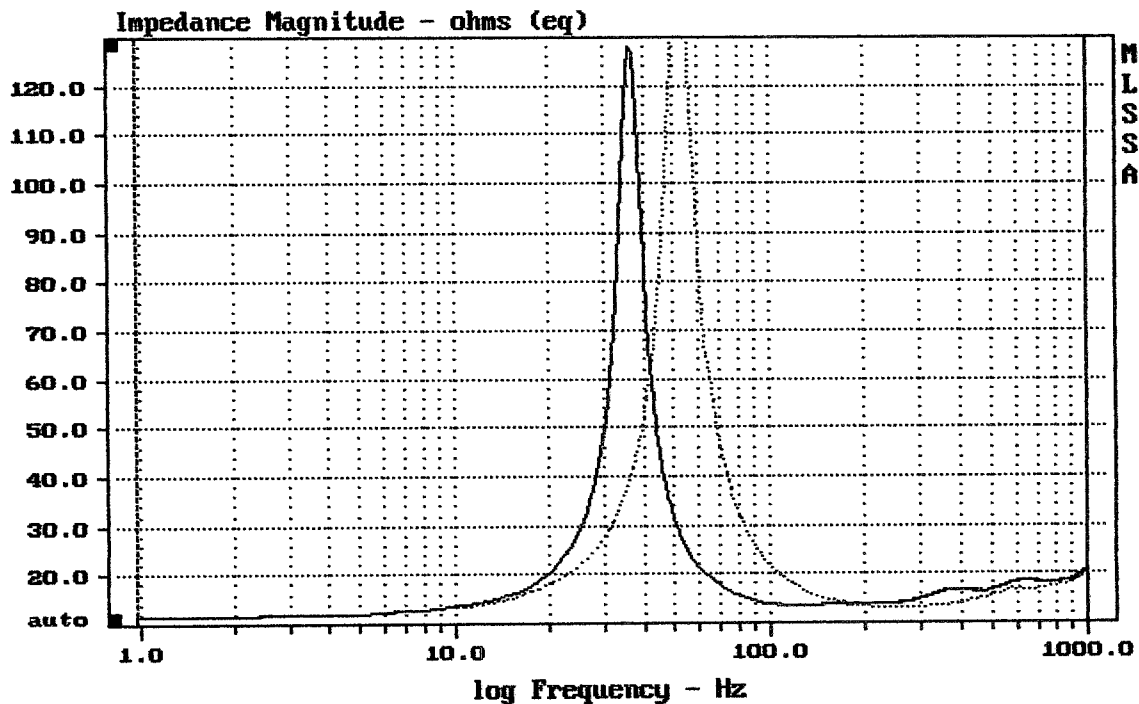

mean: 18.97, rms: 23.9, std: 14.54, max: 150.7, min: 11.65

MLSSA: Frequency Domain