


Level (100:5604 Hz) = 97.85 dB SPL/watt (8 ohms, @1.00 meters)

EMINENCE LE12-35

MLSSA: Frequency Domain

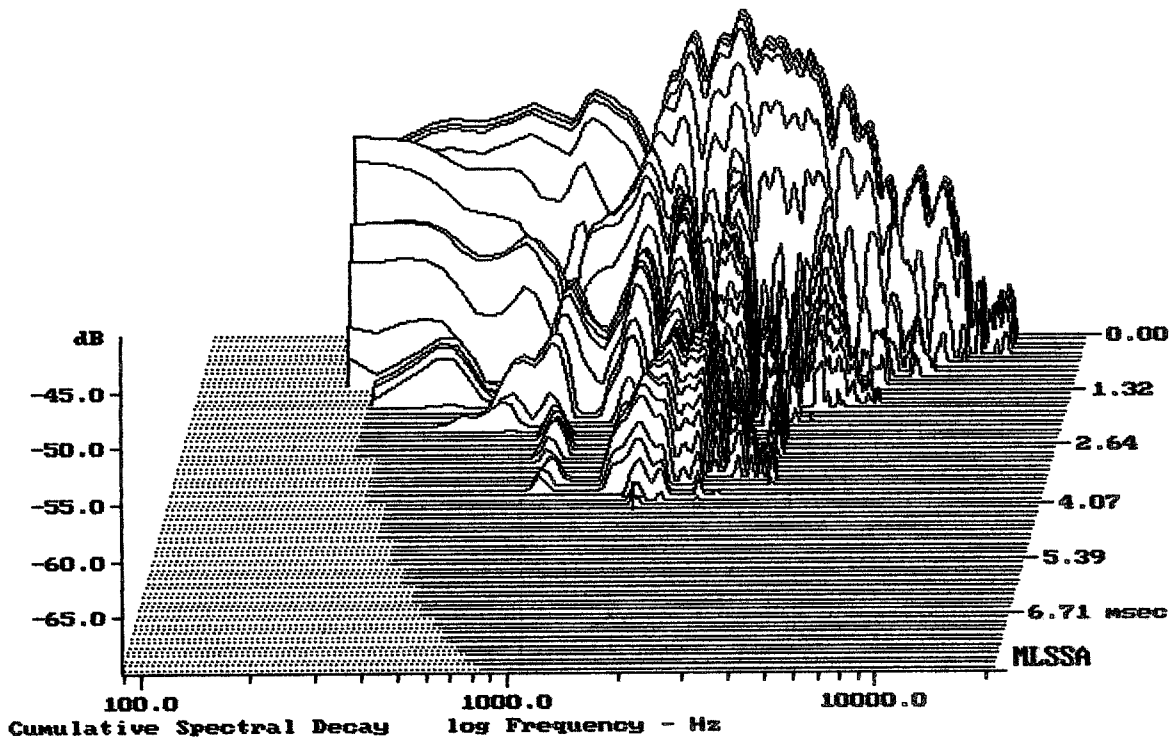

-69.30 dB, 1642 Hz (37), 4.070 msec (38)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.25	Ohms
2	Fs	78.31	Hz
3	Re	5.69	Ohms[dc]
4	Res	56.68	Ohms
5	Qms	22.47	
6	Qes	2.26	
7	Qts	2.05	
8	L1	0.43	mH
9	L2	0.57	mH
10	R2	2.63	Ohms
11	RMSE-load	0.15	Ohms
12	Vas(Sd)	72.92	liters
13	Mms	22.43	grams
14	Cms	184	$\mu\text{M}/\text{Newton}$
15	B1	5.28	Tesla-M
16	SPLref(Sd)	93.7	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (30.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -32.8% (-20% to -50% is recommended).

EMINENCE LE12-35

MLSSA: Parameters

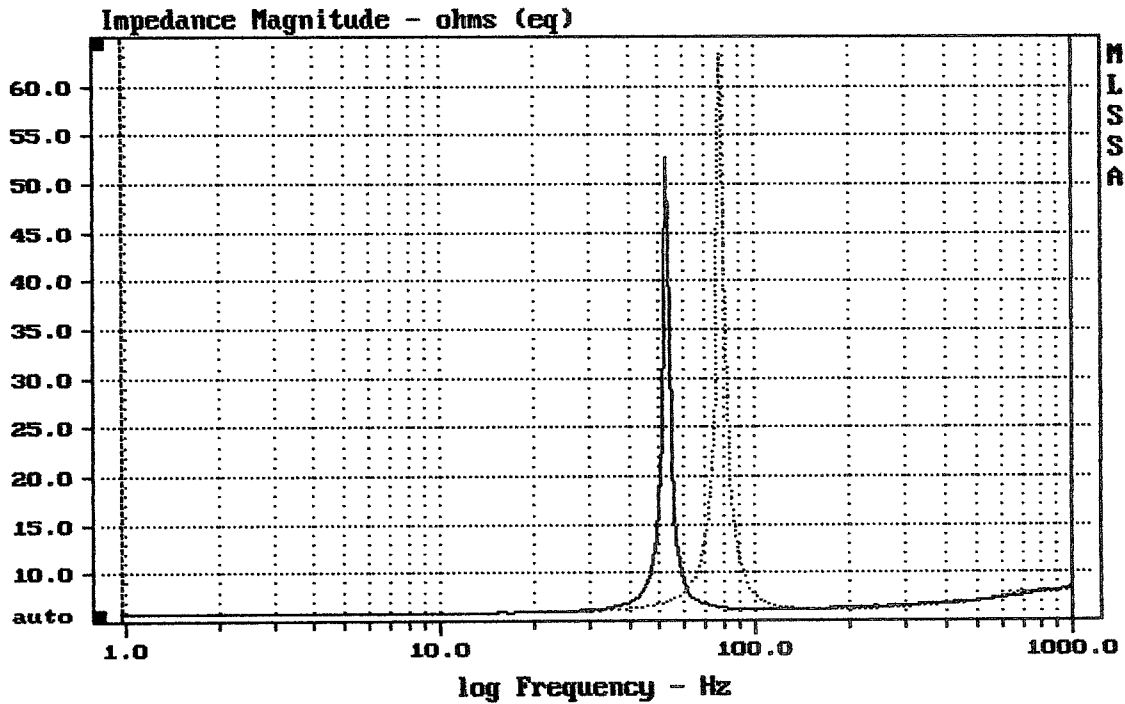

mean: 7.62, rms: 8.446, std: 3.645, max: 63.26, min: 5.741

MLSSA: Frequency Domain