


Level (100:6503 Hz) = 101.15 dB SPL/watt (16 ohms, @1.00 meters)

EMINENCE MAN O WAR

MLSSA: Frequency Domain

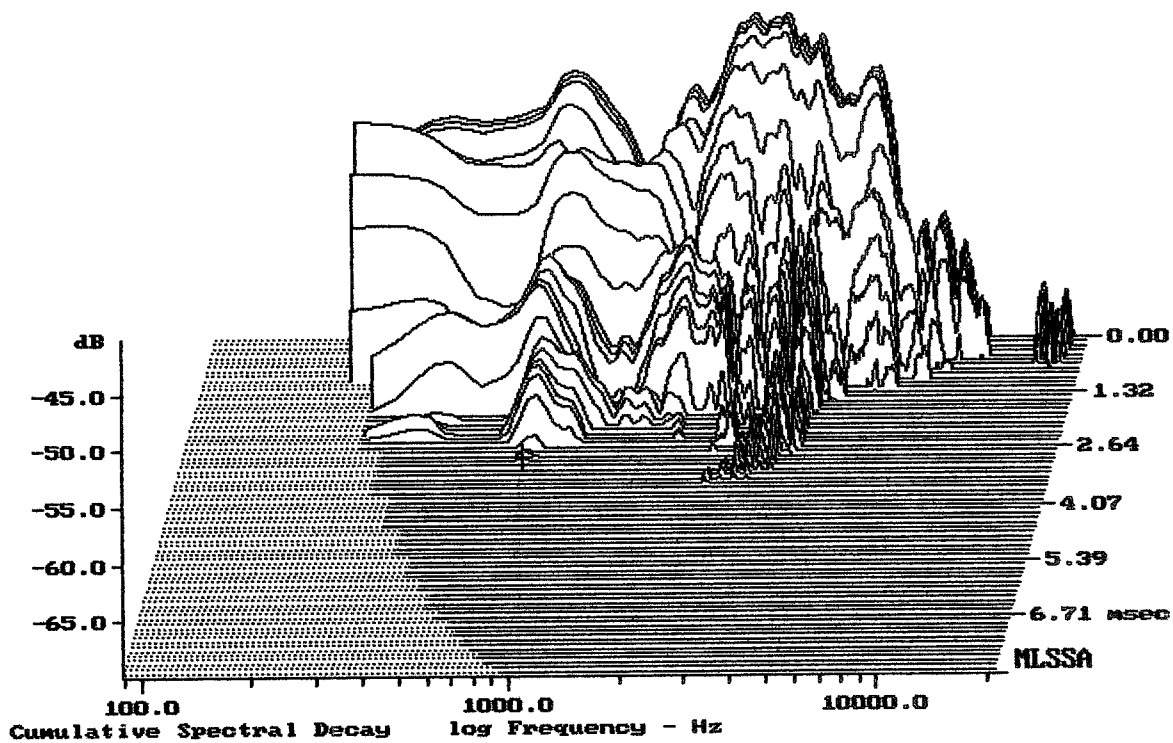

-69.61 dB, 755 Hz (17), 2.970 msec (28)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.78	Ohms
2	Fs	95.77	Hz
3	Re	13.28	Ohms[dc]
4	Res	275.45	Ohms
5	Qms	20.91	
6	Qes	1.01	
7	Qts	0.96	
8	L1	-0.10	mH
9	L2	2.15	mH
10	R2	23.08	Ohms
11	RMSE-load	1.04	Ohms
12	Vas(Sd)	38.00	liters
13	Mms	26.63	grams
14	Cms	104	$\mu\text{M}/\text{Newton}$
15	B1	14.53	Tesla-M
16	SPLref(Sd)	97.0	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (40.00 grams)

Area (Sd): 510.71 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -34.7% (-20% to -50% is recommended).

EMINENCE MAN O WAR

MLSSA: Parameters

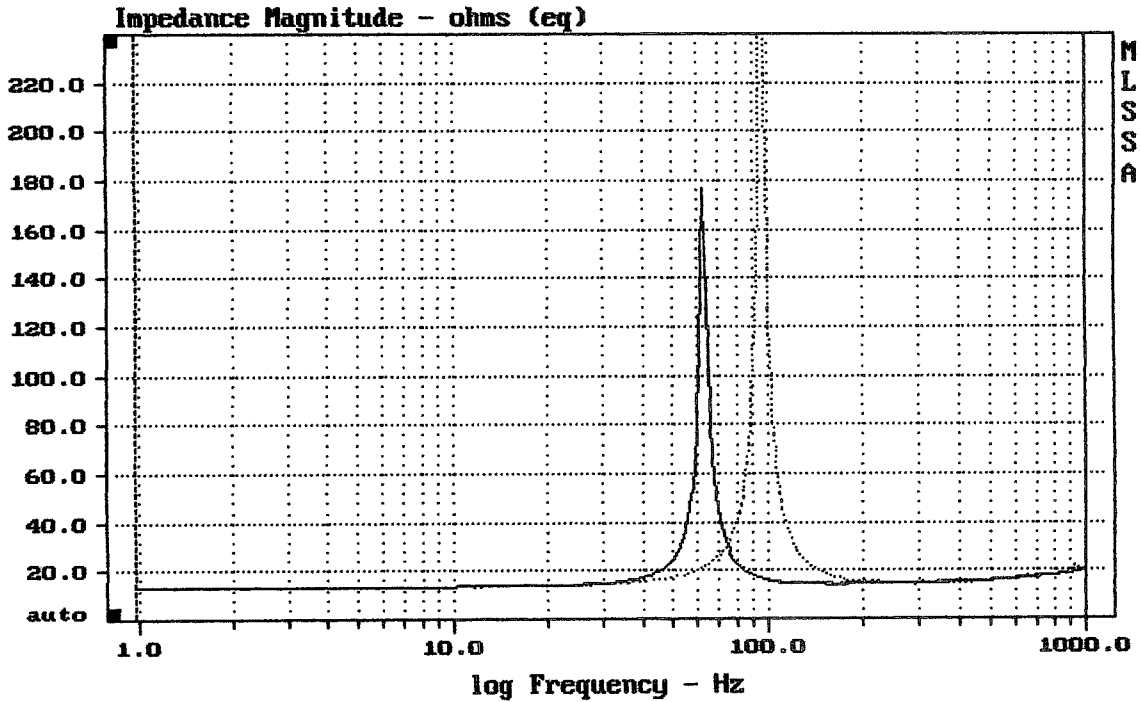

mean: 20.38, rms: 29.25, std: 20.98, max: 284.1, min: 13.37

MLSSA: Frequency Domain