



Sensitivity Magnitude - dB SPL/watt (16 ohms, @1.00 meters)

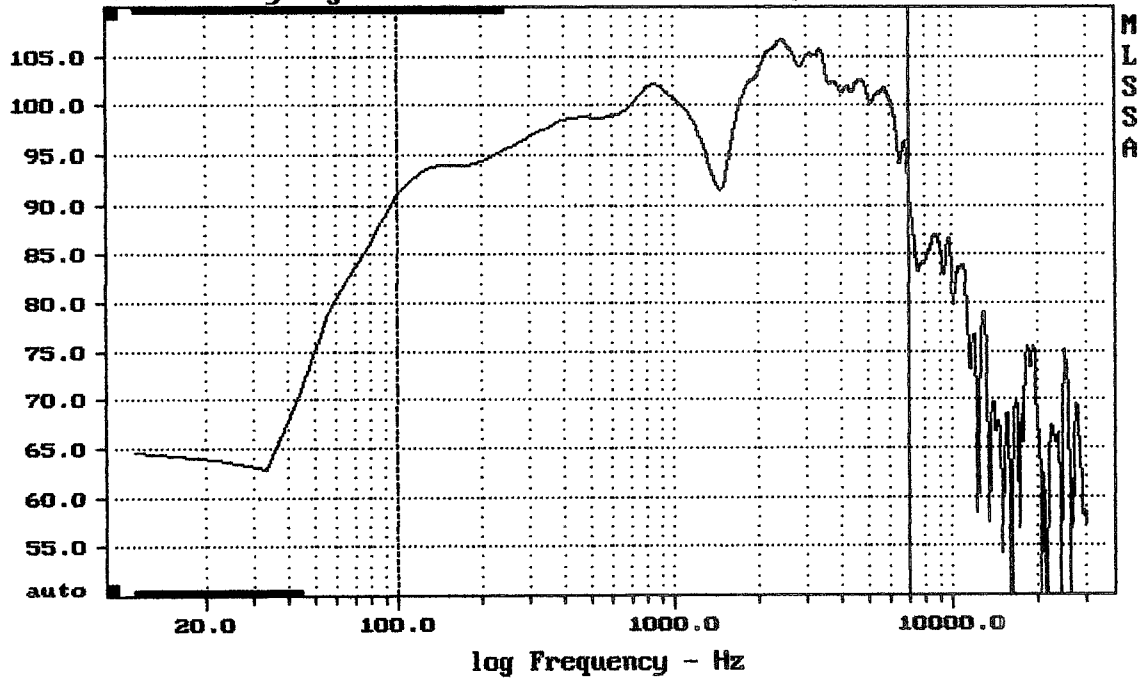

Level (100:7002 Hz) = 100.43 dB SPL/watt (16 ohms, @1.00 meters)

EMINENCE PRIVATE JACK 16

MLSSA: Frequency Domain

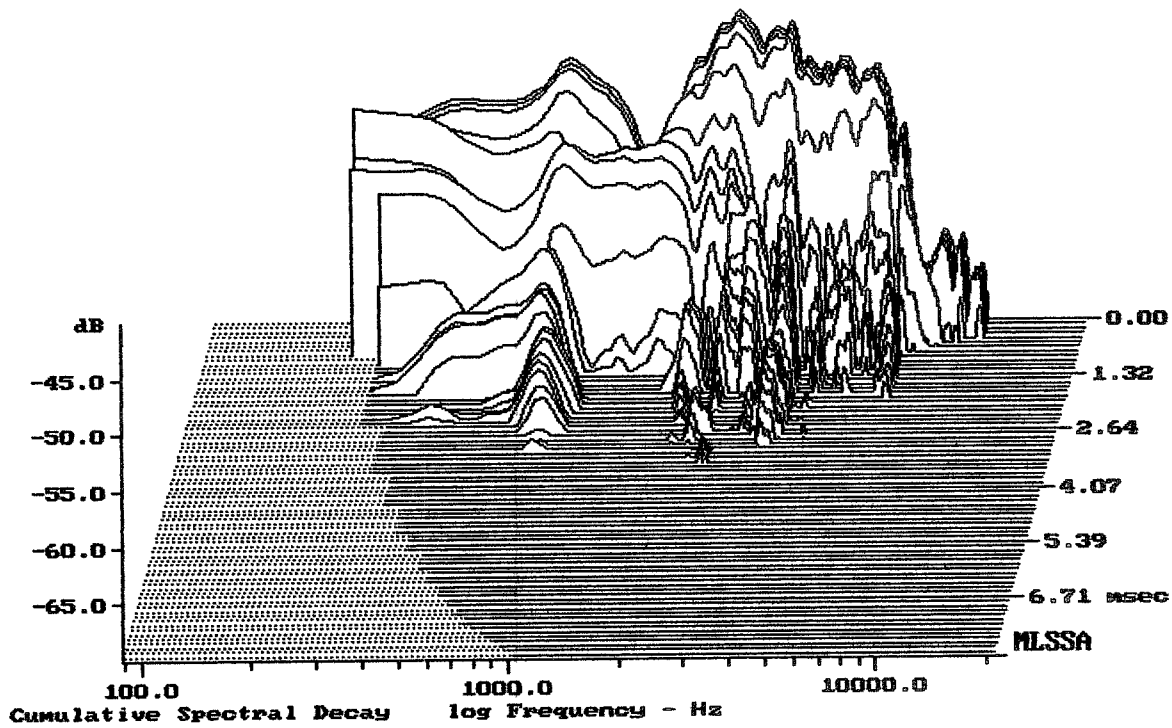

-68.82 dB, 2397 Hz (54), 3.410 msec (32)

DT10

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.83	Ohms
2	Fs	97.95	Hz
3	Re	13.97	Ohms[dc]
4	Res	309.06	Ohms
5	Qms	21.16	
6	Qes	0.96	
7	Qts	0.92	
8	L1	0.50	mH
9	L2	2.06	mH
10	R2	12.91	Ohms
11	RMSE-load	0.77	Ohms
12	Vas(Sd)	29.59	liters
13	Mms	35.32	grams
14	Cms	75	μ M/Newton
15	B1	17.82	Tesla-M
16	SPLref(Sd)	96.5	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (30.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -26.7% (-20% to -50% is recommended).

EMINENCE PRIVATE JACK 16

MLSSA: Parameters

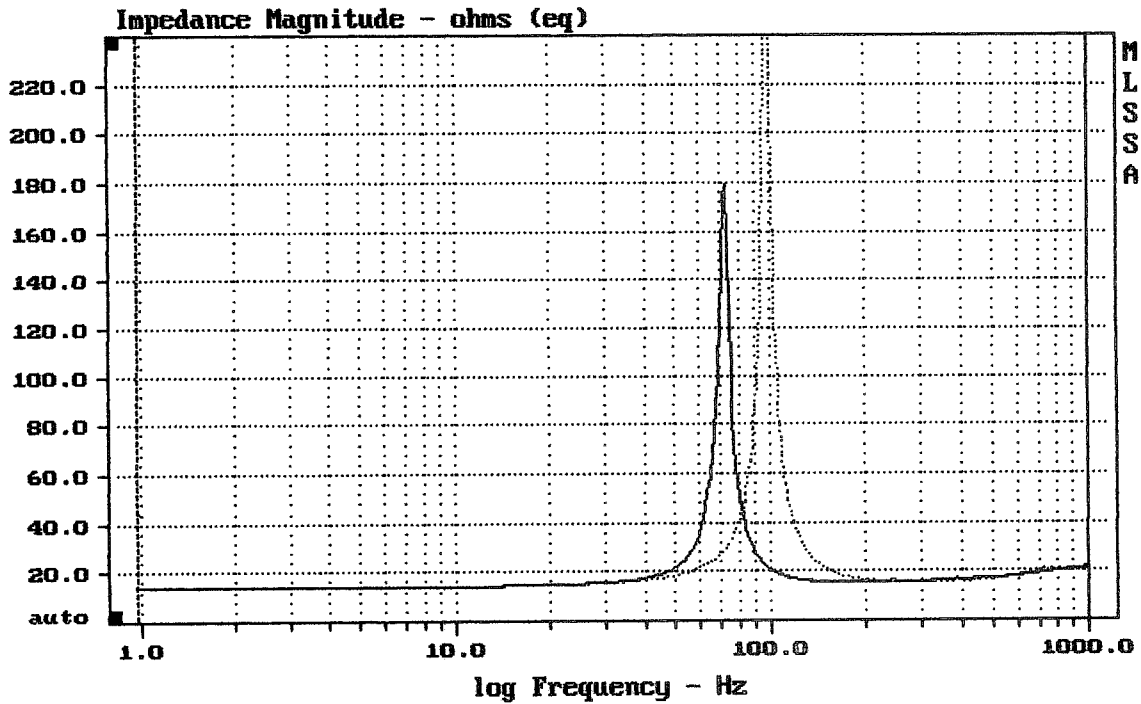

mean: 22.18, rms: 32.43, std: 23.66, max: 317.8, min: 14.06

MLSSA: Frequency Domain