


Level (100:7002 Hz) = 101.35 dB SPL/watt (8 ohms, @1.00 meters)

EMINENCE RED FANG

MLSSA: Frequency Domain

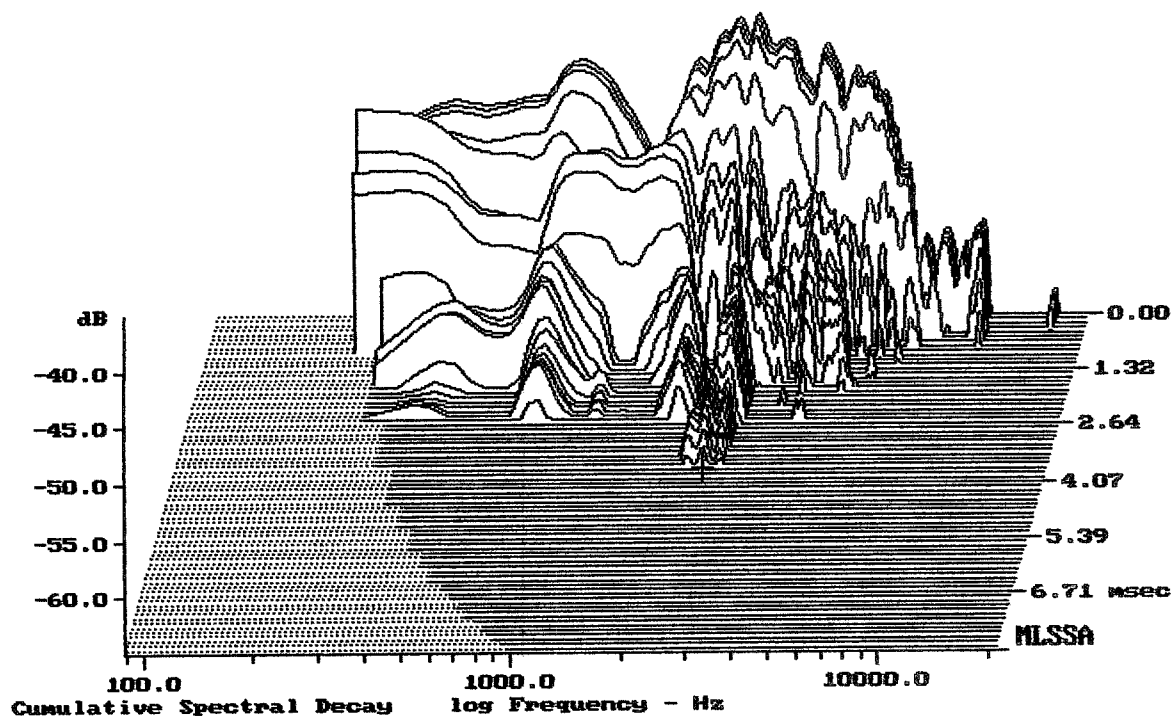

-64.79 dB, 2441 Hz (55), 3.740 msec (35)

DTTO

Measured Data

QC Limits

| Line | Parameter | Value | Units |
|------|------------|--------|-----------------------------|
| 1 | RMSE-free | 0.30 | Ohms |
| 2 | Fs | 98.49 | Hz |
| 3 | Re | 5.92 | Ohms[dc] |
| 4 | Res | 125.93 | Ohms |
| 5 | Qms | 16.63 | |
| 6 | Qes | 0.78 | |
| 7 | Qts | 0.75 | |
| 8 | L1 | 0.18 | mH |
| 9 | L2 | 1.04 | mH |
| 10 | R2 | 8.08 | Ohms |
| 11 | RMSE-load | 0.52 | Ohms |
| 12 | Vas(Sd) | 37.27 | liters |
| 13 | Mms | 27.74 | grams |
| 14 | Cms | 94 | $\mu\text{M}/\text{Newton}$ |
| 15 | B1 | 11.40 | Tesla-M |
| 16 | SPLref(Sd) | 98.4 | dB[Re] |
| 17 | Rub-index | 0.01 | |

Method: Mass-loaded (30.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -31.3% (-20% to -50% is recommended).

EMINENCE RED FANG

MLSSA: Parameters

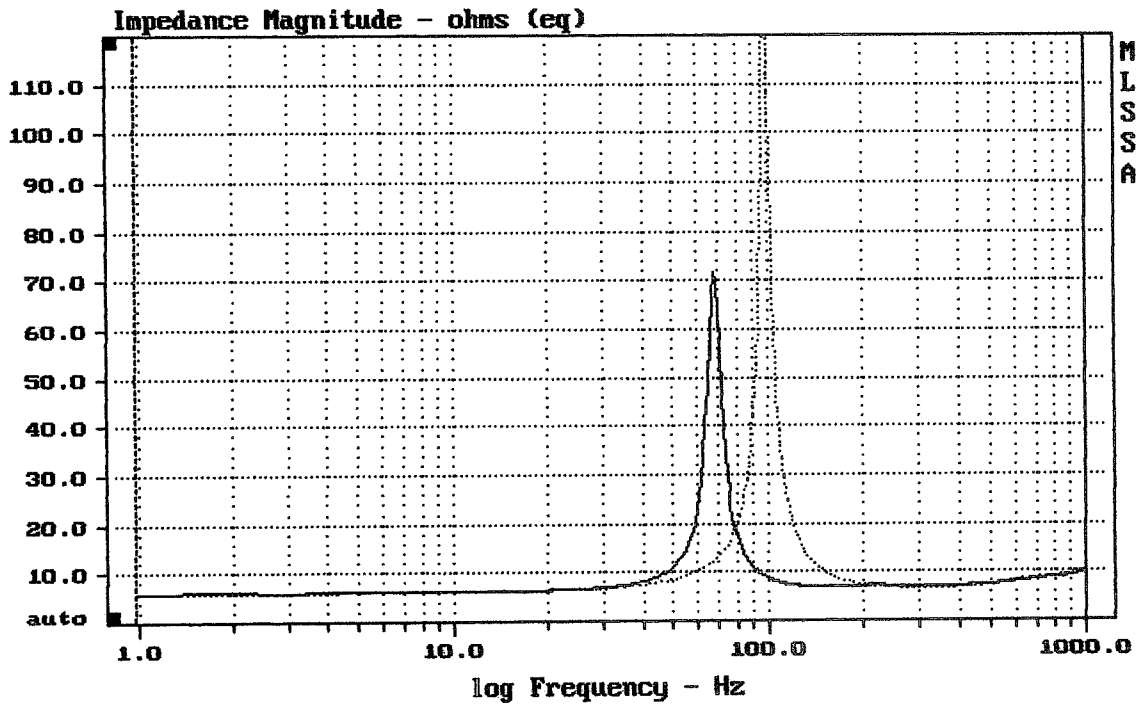

mean: 10.09, rms: 14.76, std: 10.78, max: 131.4, min: 5.976

MLSSA: Frequency Domain