


Level (100:7002 Hz) = 100.92 dB SPL/watt (16 ohms, @1.00 meters)

EMINENCE RED FANG 16

MLSSA: Frequency Domain

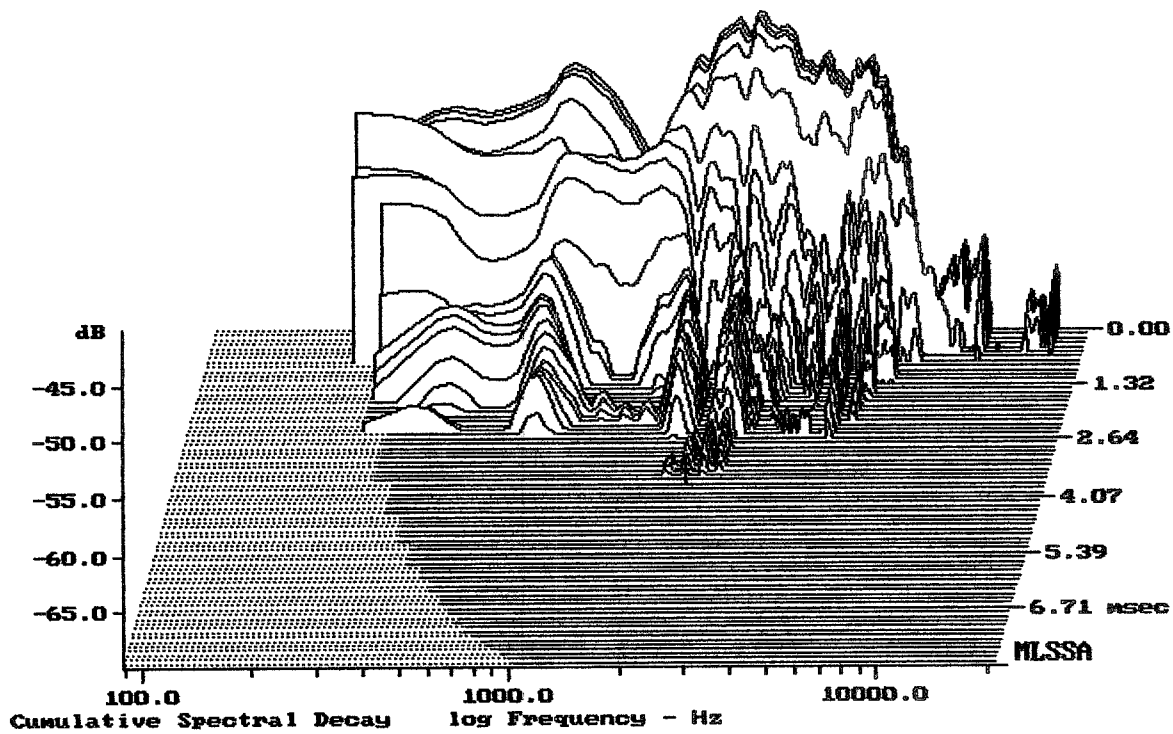

-69.45 dB, 2175 Hz (49), 3.520 msec (33)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.34	Ohms
2	Fs	89.80	Hz
3	Re	12.26	Ohms[dc]
4	Res	169.69	Ohms
5	Qms	15.29	
6	Qes	1.11	
7	Qts	1.03	
8	L1	0.58	mH
9	L2	1.35	mH
10	R2	8.57	Ohms
11	RMSE-load	0.45	Ohms
12	Vas(Sd)	43.15	liters
13	Mms	28.82	grams
14	Cms	109	$\mu\text{M}/\text{Newton}$
15	B1	13.43	Tesla-M
16	SPLref(Sd)	96.3	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (30.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -29.2% (-20% to -50% is recommended).

EMINENCE RED FANG 16

MLSSA: Parameters

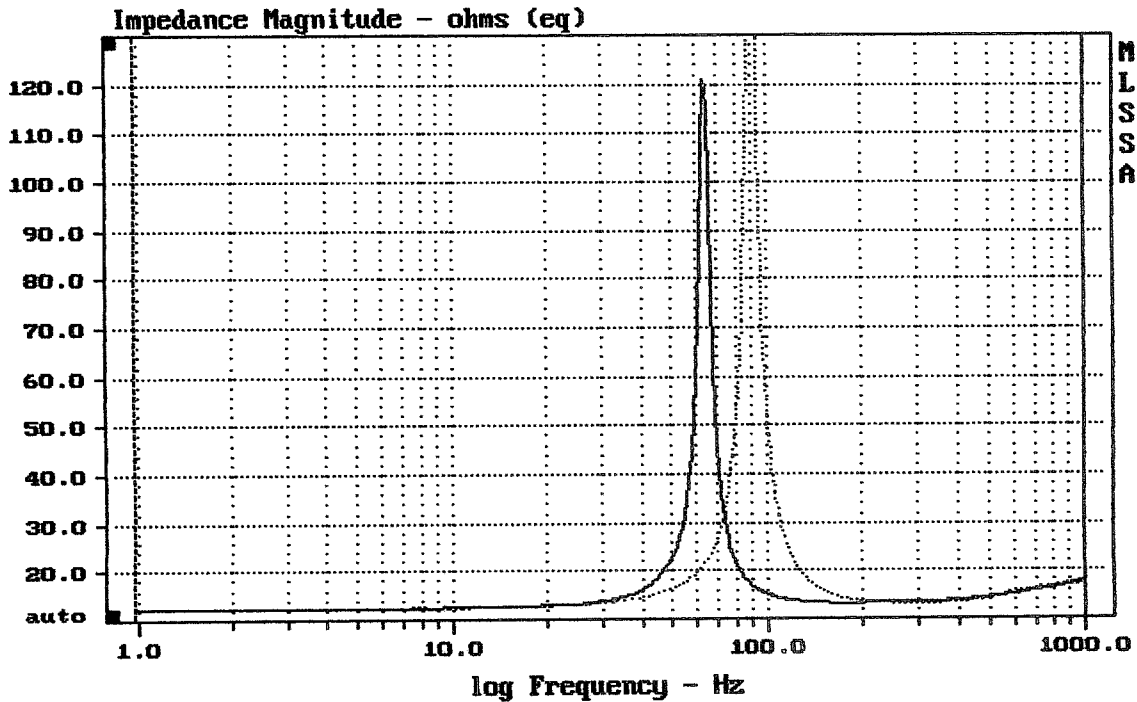

mean: 17.67, rms: 22.69, std: 14.23, max: 183.9, min: 12.31

MLSSA: Frequency Domain