


Level (100:5504 Hz) = 100.69 dB SPL/watt (8 ohms, @1.00 meters)

EVM12L SERIES II OPR.

MLSSA: Frequency Domain

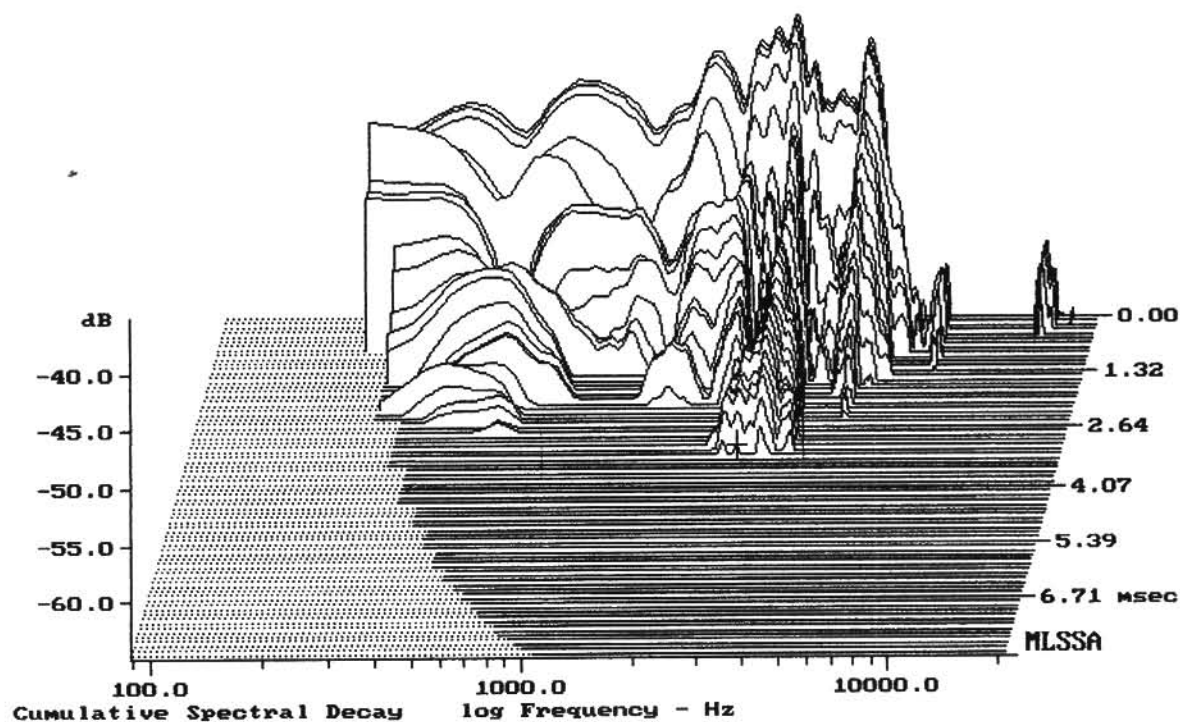

-64.18 dB, 2708 Hz (61), 3.300 msec (31)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.73	Ohms
2	Fs	39.53	Hz
3	Re	5.32	Ohms[dc]
4	Res	140.77	Ohms
5	Qms	4.73	
6	Qes	0.18	
7	Qts	0.17	
8	L1	0.61	mH
9	L2	1.39	mH
10	R2	4.02	Ohms
11	RMSE-load	0.78	Ohms
12	Vas(Sd)	179.21	liters
13	Mms	35.82	grams
14	Cms	453	$\mu\text{M}/\text{Newton}$
15	B1	16.27	Tesla-M
16	SPLref(Sd)	99.7	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -42.0% (-20% to -50% is recommended).

EVM12L SERIES II OPR.

MLSSA: Parameters

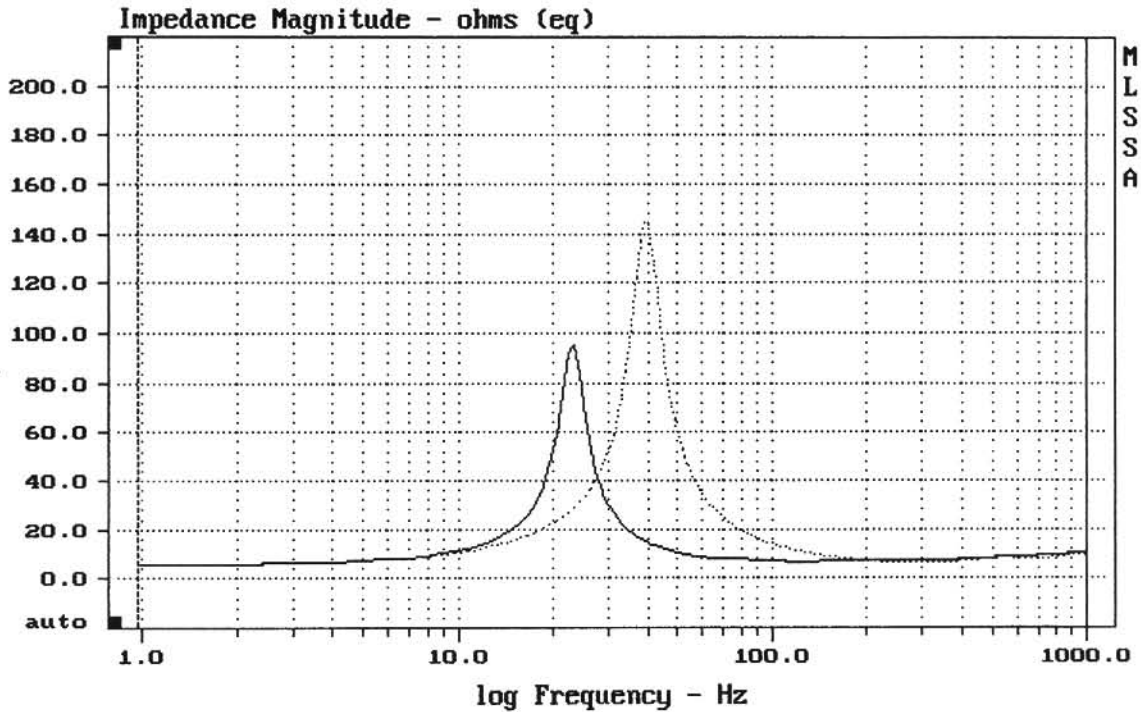

mean: 11.24, rms: 18.05, std: 14.12, max: 146.2, min: 5.481

MLSSA: Frequency Domain