


Level (100:3496 Hz) = 101.31 dB SPL/watt (8 ohms, @1.00 meters)

EUM12S OEM

MLSSA: Frequency Domain

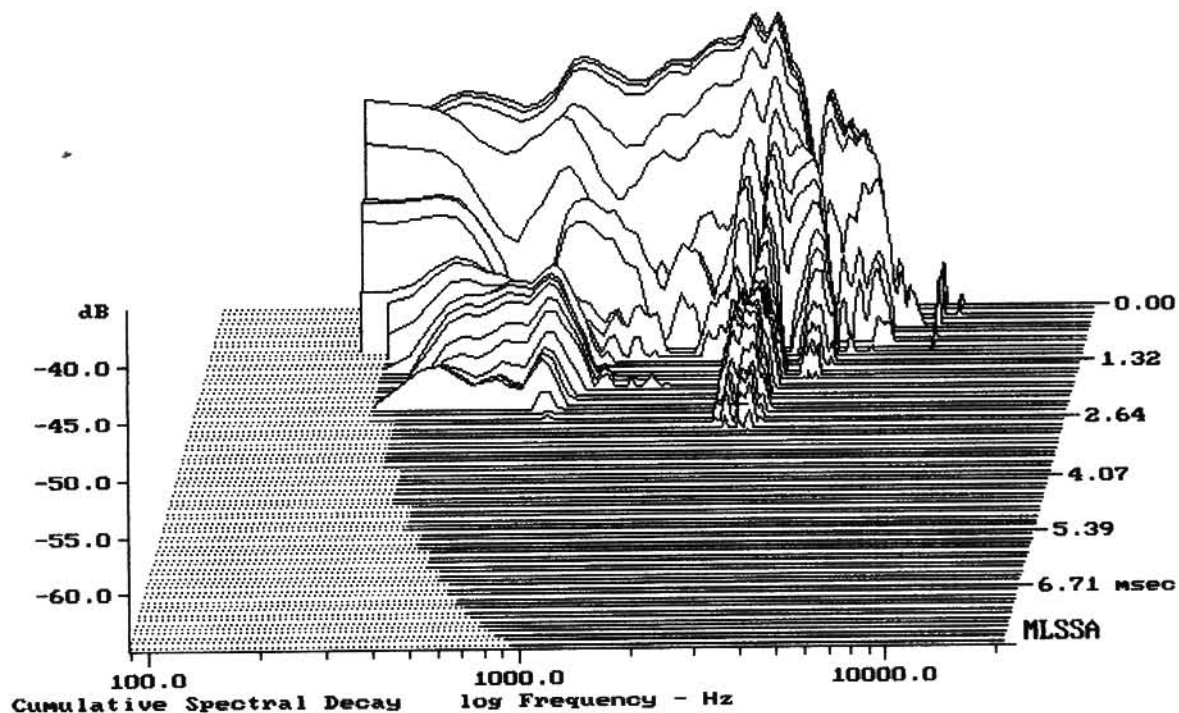

-63.50 dB, 2663 Hz (60), 2.750 msec (26)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.61	Ohms
2	Fs	56.99	Hz
3	Re	5.47	Ohms[dc]
4	Res	86.94	Ohms
5	Qms	3.86	
6	Qes	0.24	
7	Qts	0.23	
8	L1	0.53	mH
9	L2	1.41	mH
10	R2	7.00	Ohms
11	RMSE-load	1.13	Ohms
12	Vas(Sd)	97.74	liters
13	Mms	31.59	grams
14	Cms	247	$\mu\text{M}/\text{Newton}$
15	B1	15.96	Tesla-M
16	SPLref(Sd)	100.6	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -44.4% (-20% to -50% is recommended).

EVM12S OEM

MLSSA: Parameters

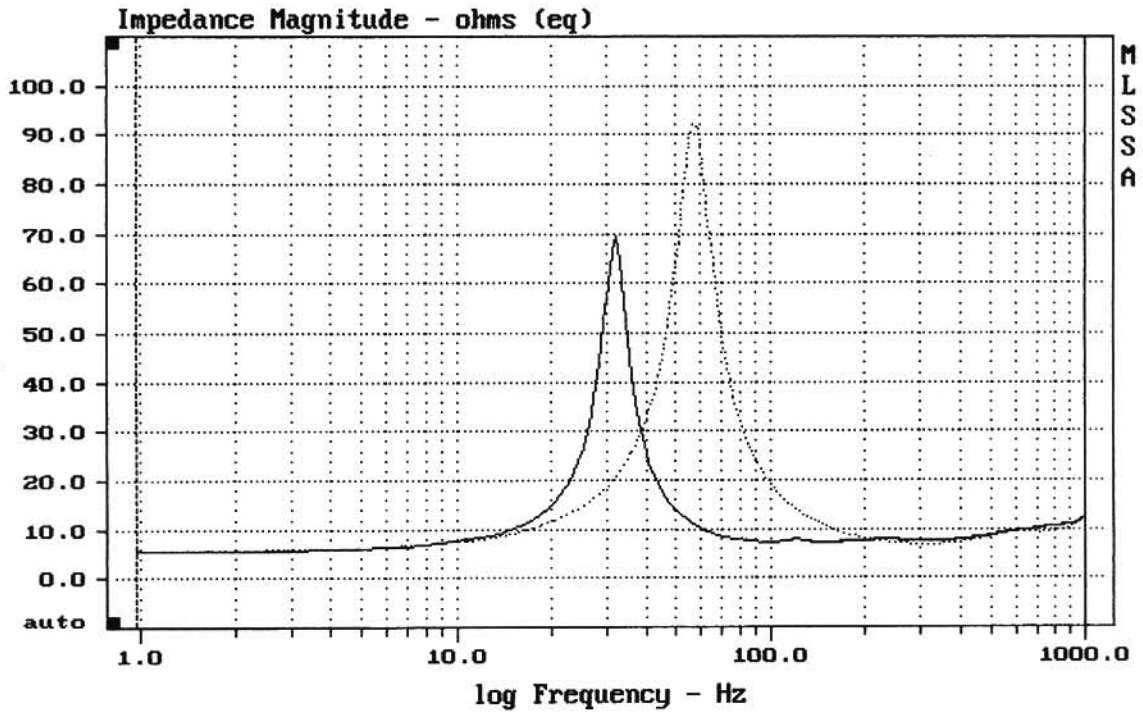

mean: 11.66, rms: 15.97, std: 10.91, max: 92.26, min: 5.574