

Measured Data

Line	Parameter	Value	Units
1	RMSE-free	0.56	Ohms
2	Fs	39.09	Hz
3	Re	5.64	Ohms[dc]
4	Res	94.55	Ohms
5	Qms	5.45	
6	Qes	0.33	
7	Qts	0.31	
8	L1	0.75	mH
9	L2	1.21	mH
10	R2	5.52	Ohms
11	RMSE-load	0.58	Ohms
12	Vas(Sd)	331.63	liters
13	Mms	51.36	grams
14	Cms	323	$\mu\text{M}/\text{Newton}$
15	B1	14.79	Tesla-M
16	SPLref(Sd)	99.7	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -27.0% (-20% to -50% is recommended).

EV 15B OEM 1998

MLSSA: Parameters

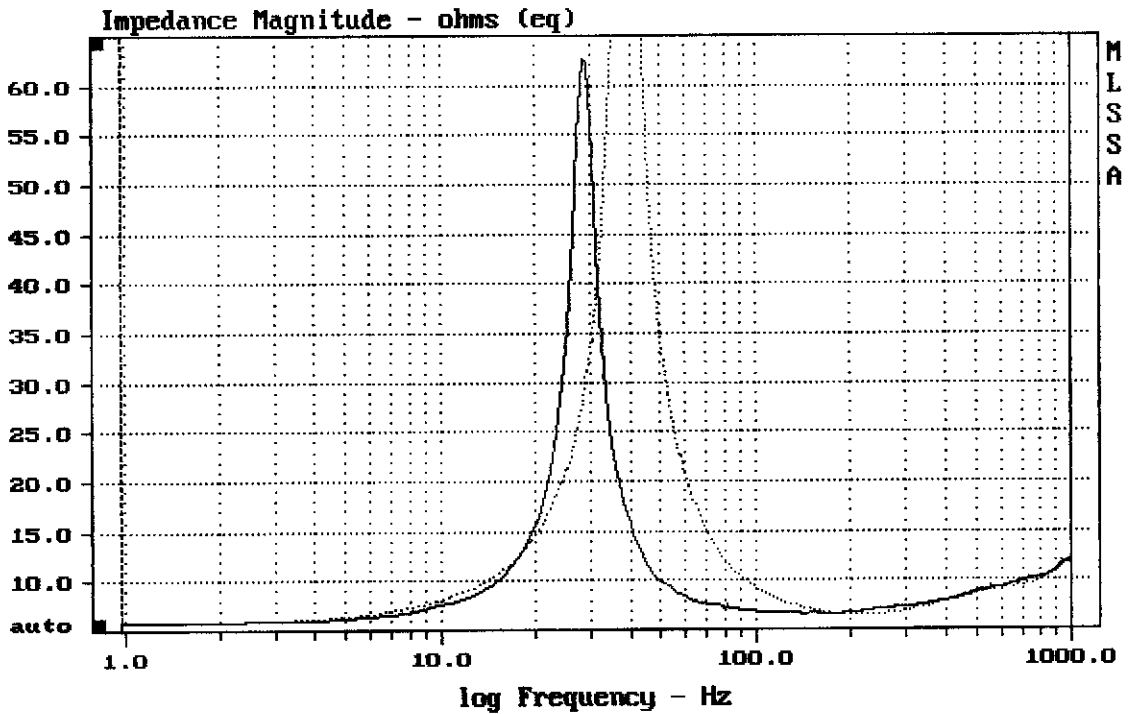

mean: 10.45, rms: 13.54, std: 8.609, max: 101, min: 5.743

MLSSA: Frequency Domain