


Level (89:4685 Hz) = 97.99 dB SPL/watt (8 ohms, @1.00 meters)

EMINENCE BASSLITE S2012

MLSSA: Frequency Domain

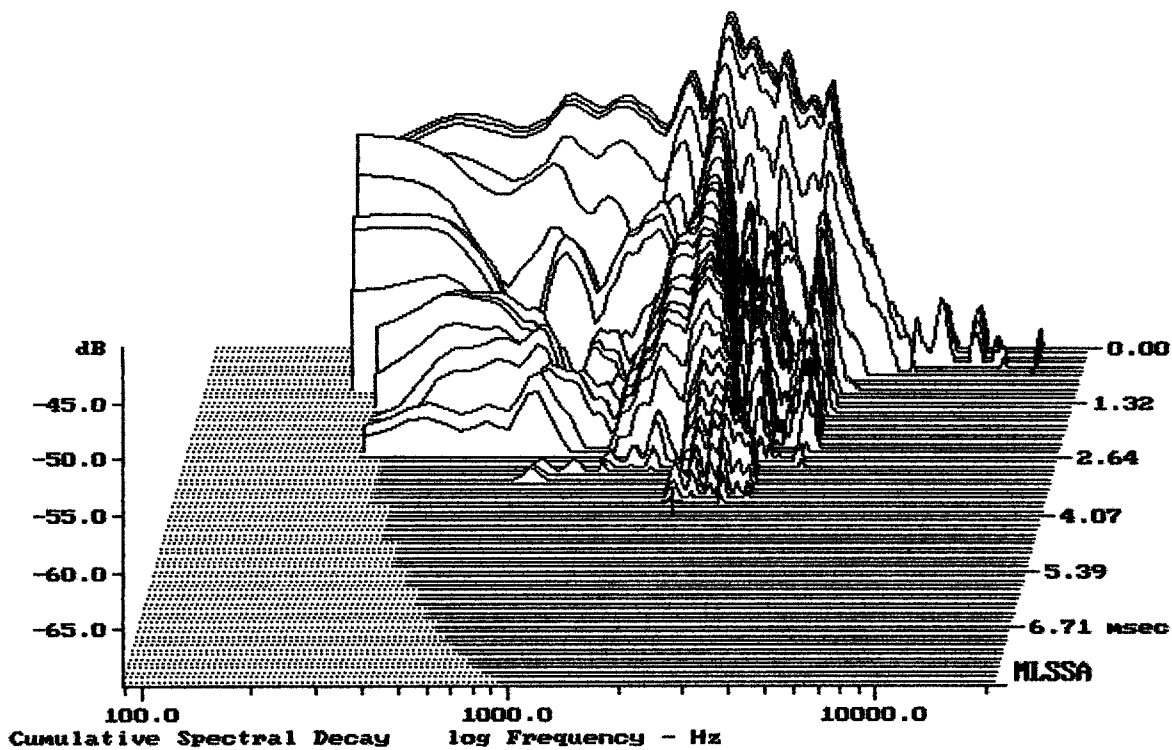

-69.79 dB, 2042 Hz (46), 3.740 msec (35)

DTTO

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.22	Ohms
2	Fs	52.18	Hz
3	Re	5.17	Ohms[dc]
4	Res	80.26	Ohms
5	Qms	9.16	
6	Qes	0.59	
7	Qts	0.55	
8	L1	0.53	mH
9	L2	0.72	mH
10	R2	3.23	Ohms
11	RMSE-load	0.24	Ohms
12	Vas(Sd)	87.25	liters
13	Mms	42.22	grams
14	Cms	220	$\mu\text{M}/\text{Newton}$
15	B1	11.01	Tesla-M
16	SPLref(Sd)	95.1	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (40.00 grams)

Area (Sd): 530.93 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -27.9% (-20% to -50% is recommended).

BASSLITE S2012

MLSSA: Parameters

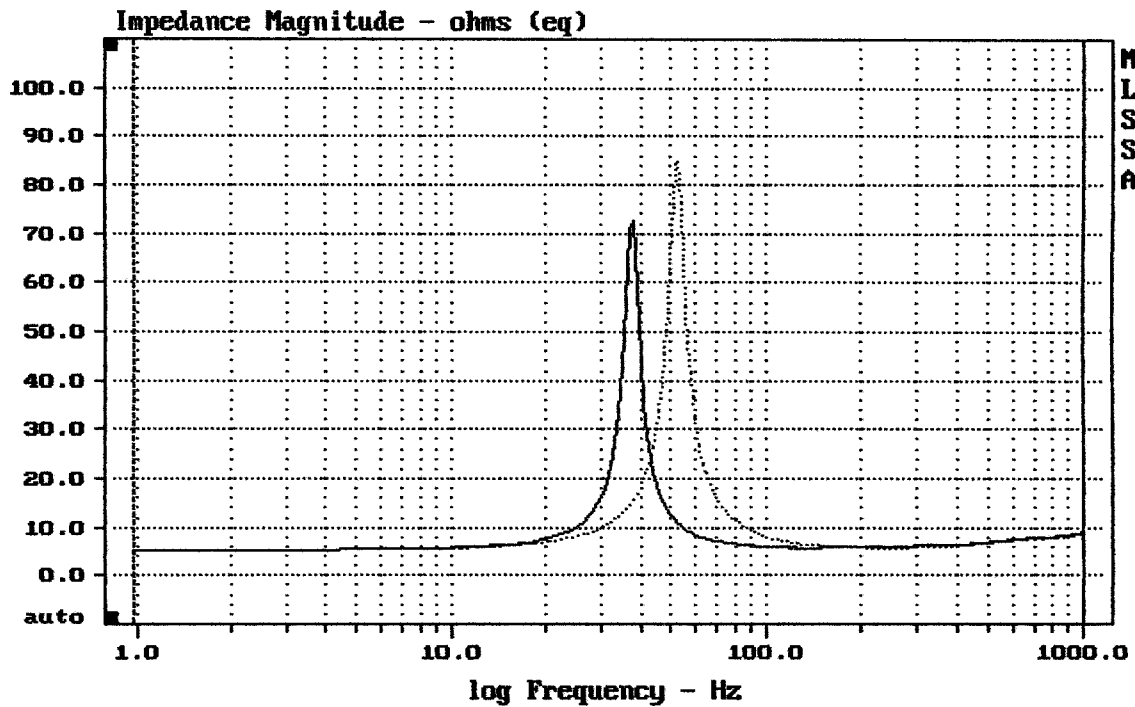

mean: 8.184, rms: 10.52, std: 6.608, max: 84.76, min: 5.277

MLSSA: Frequency Domain