


Level (100:2996 Hz) = 97.93 dB SPL/watt (4 ohms, @1.50 meters)

EMINENCE KAPPA15C

MLSSA: Frequency Domain

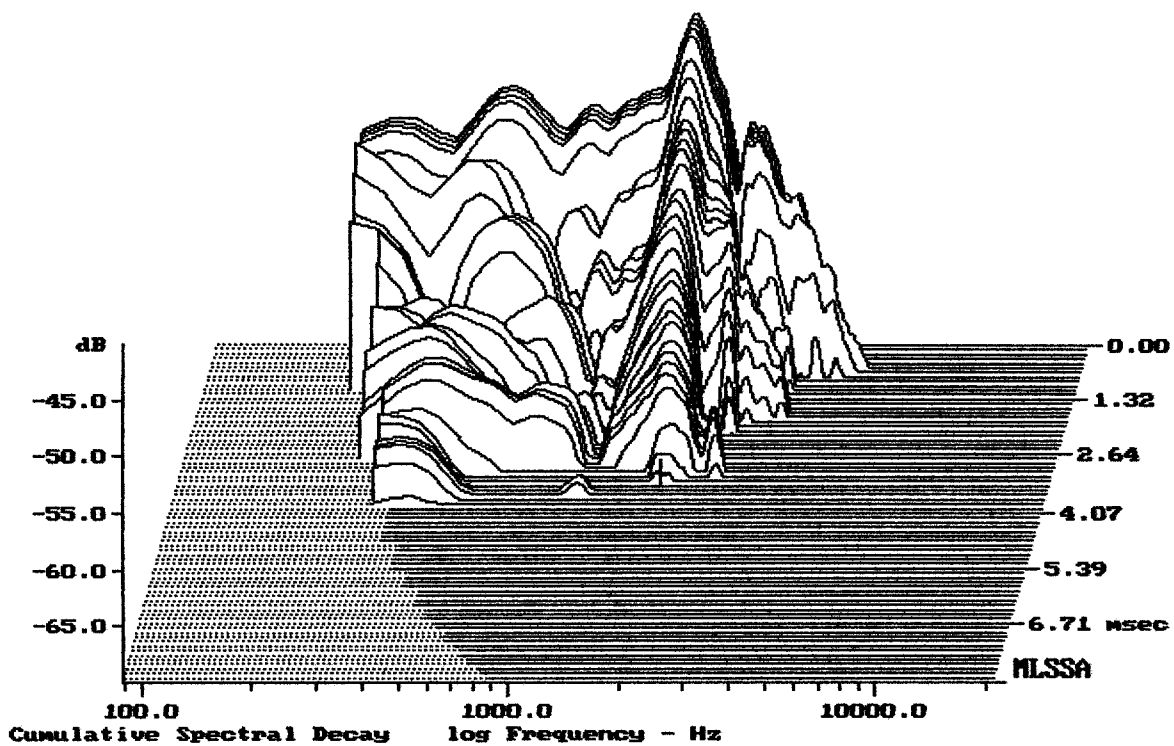

-69.27 dB, 1820 Hz (41), 3.300 msec (31)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.47	Ohms
2	Fs	33.62	Hz
3	Re	3.67	Ohms[dc]
4	Res	103.55	Ohms
5	Qms	8.23	
6	Qes	0.29	
7	Qts	0.28	
8	L1	0.45	mH
9	L2	1.15	mH
10	R2	7.21	Ohms
11	RMSE-load	0.38	Ohms
12	Vas(Sd)	307.78	liters
13	Mms	74.83	grams
14	Cms	300	$\mu\text{M}/\text{Newton}$
15	B1	14.10	Tesla-M
16	SPLref(Sd)	97.9	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -28.0% (-20% to -50% is recommended).

KAPPA15C

MLSSA: Parameters

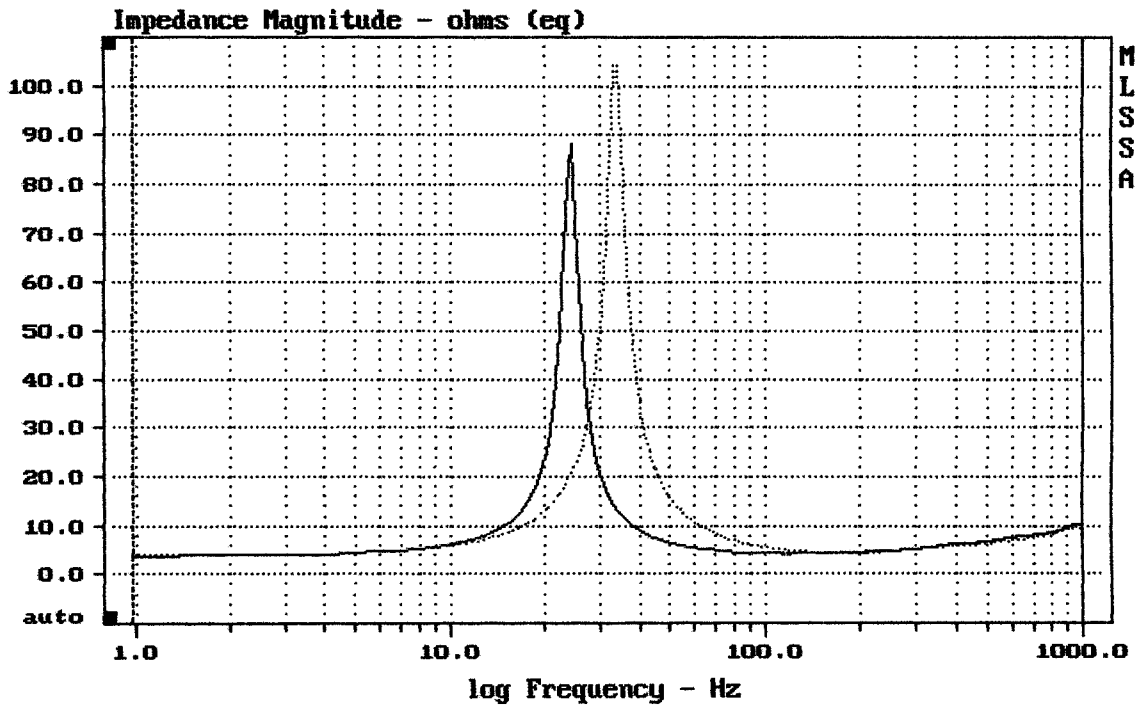

mean: 7.69, rms: 10.83, std: 7.419, max: 104.7, min: 3.849

MLSSA: Frequency Domain