

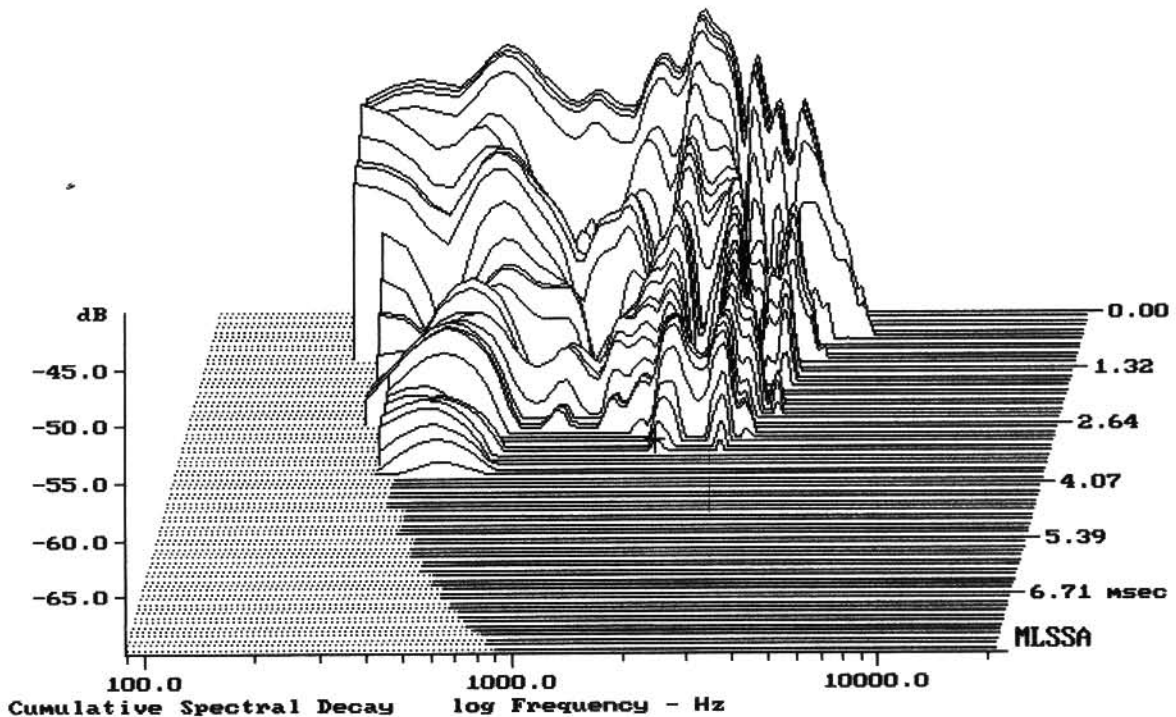

---

Level (100:3806 Hz) = 100.07 dB SPL/watt (8 ohms, @1.50 meters)

---

KAPPALITE 3015

MLSSA: Frequency Domain



-68.92 dB, 1731 Hz (39), 3.300 msec (31)

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.62	Ohms
2	Fs	46.54	Hz
3	Re	5.61	Ohms[dc]
4	Res	110.51	Ohms
5	Qms	7.85	
6	Qes	0.40	
7	Qts	0.38	
8	L1	0.71	mH
9	L2	1.30	mH
10	R2	5.24	Ohms
11	RMSE-load	0.60	Ohms
12	Vas(Sd)	142.31	liters
13	Mms	84.44	grams
14	Cms	139	$\mu\text{M}/\text{Newton}$
15	Bl	18.65	Tesla-M
16	SPLref(Sd)	97.4	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm

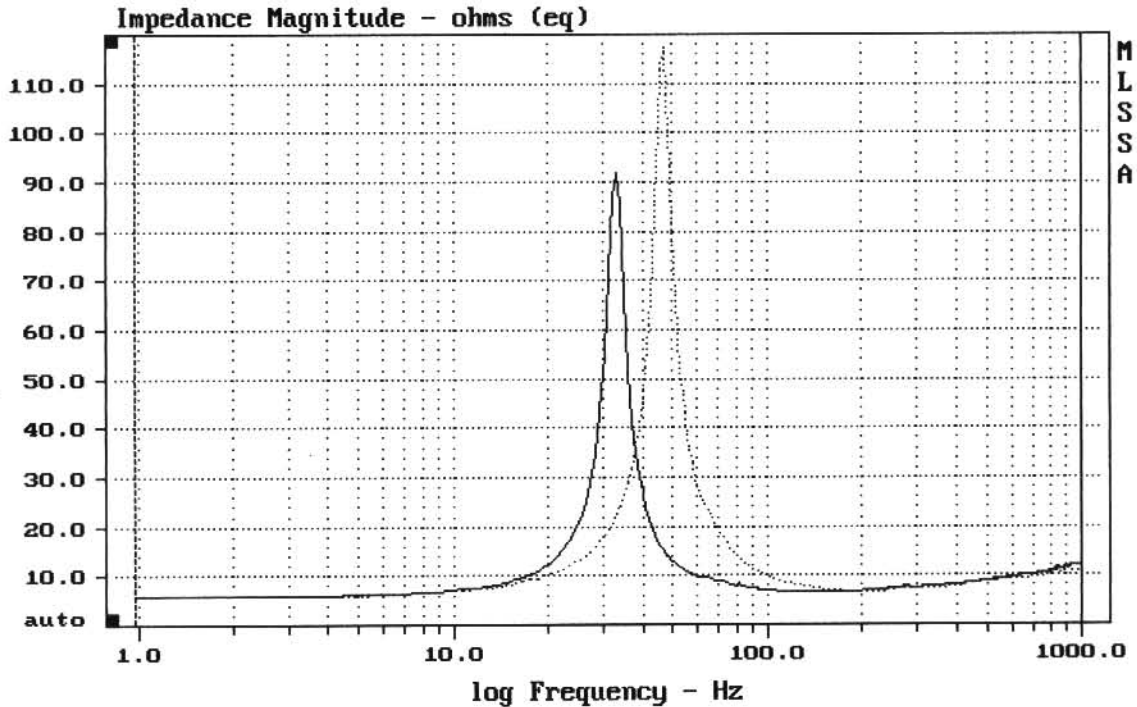
DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -29.2% (-20% to -50% is recommended).

KAPPALITE 3015

MLSSA: Parameters



mean: 10.57, rms: 14.06, std: 9.271, max: 117.3, min: 5.688

KAPPALITE 3015

MLSSA: Frequency Domain