



Level (100:2497 Hz) = 92.21 dB SPL/watt (8 ohms, @1.50 meters)

EMINENCE KILOMAX PRO 15

MLSSA: Frequency Domain

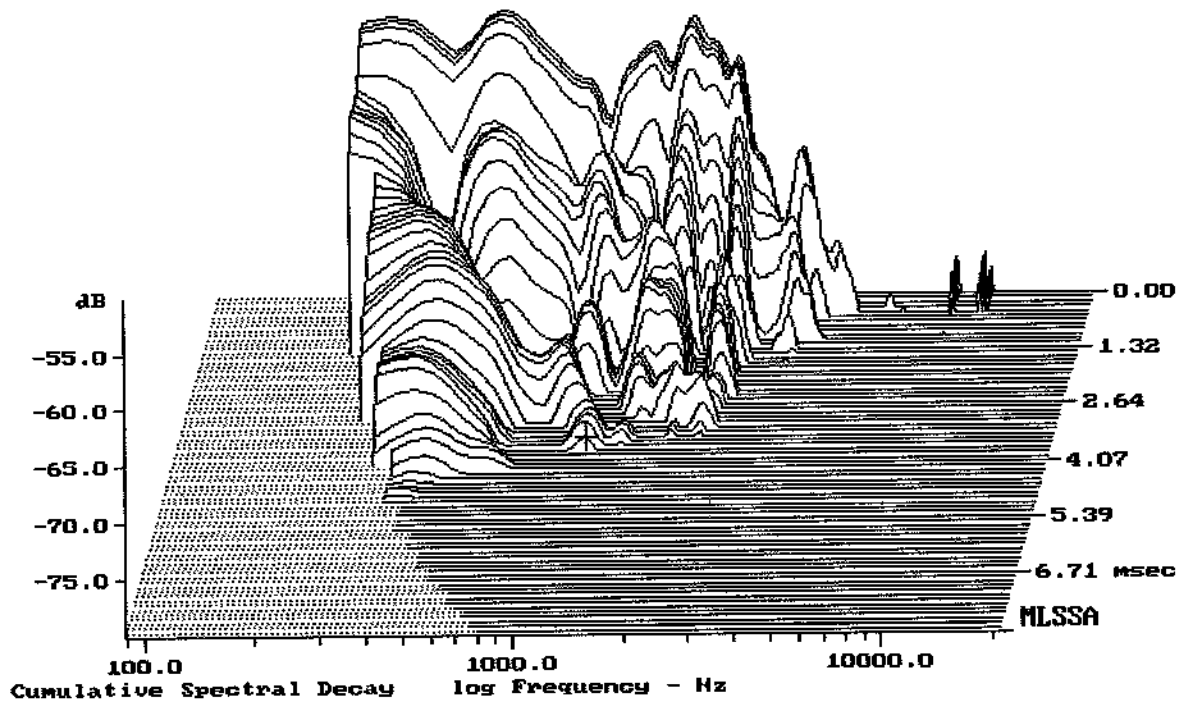


-78.88 dB, 1154 Hz (26), 3.740 msec (35)

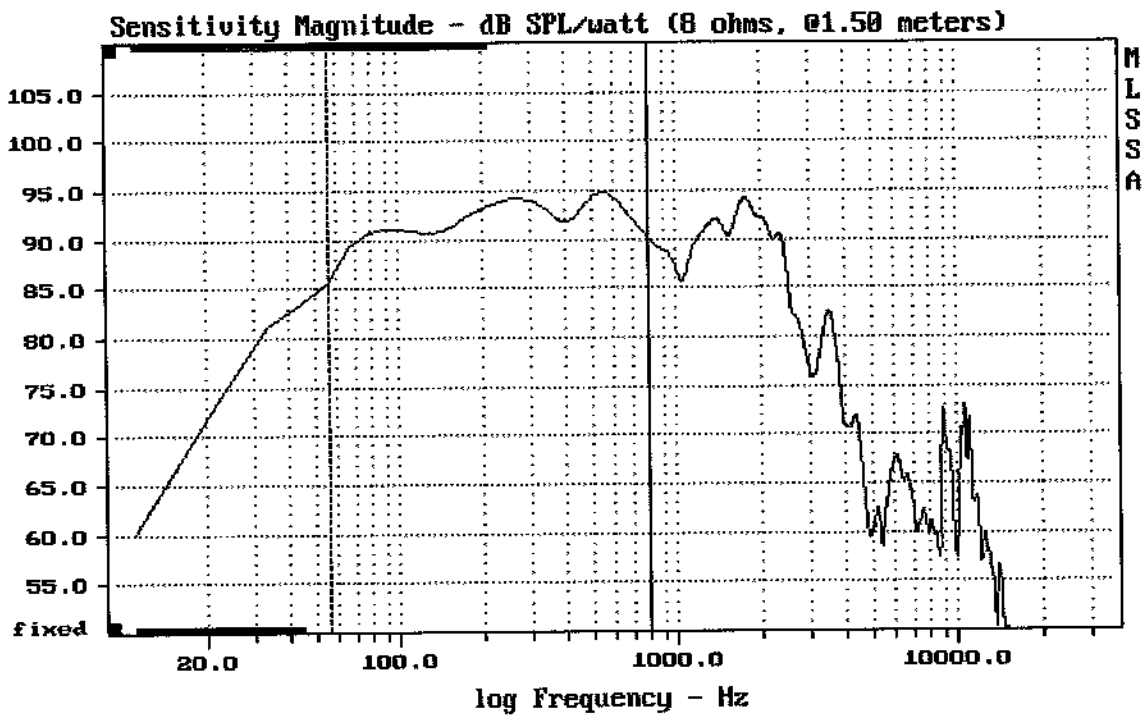

Level (55:799 Hz) = 92.23 dB SPL/watt (8 ohms, @1.50 meters)

EMINENCE KILOMAX PRO 15

MLSSA: Frequency Domain

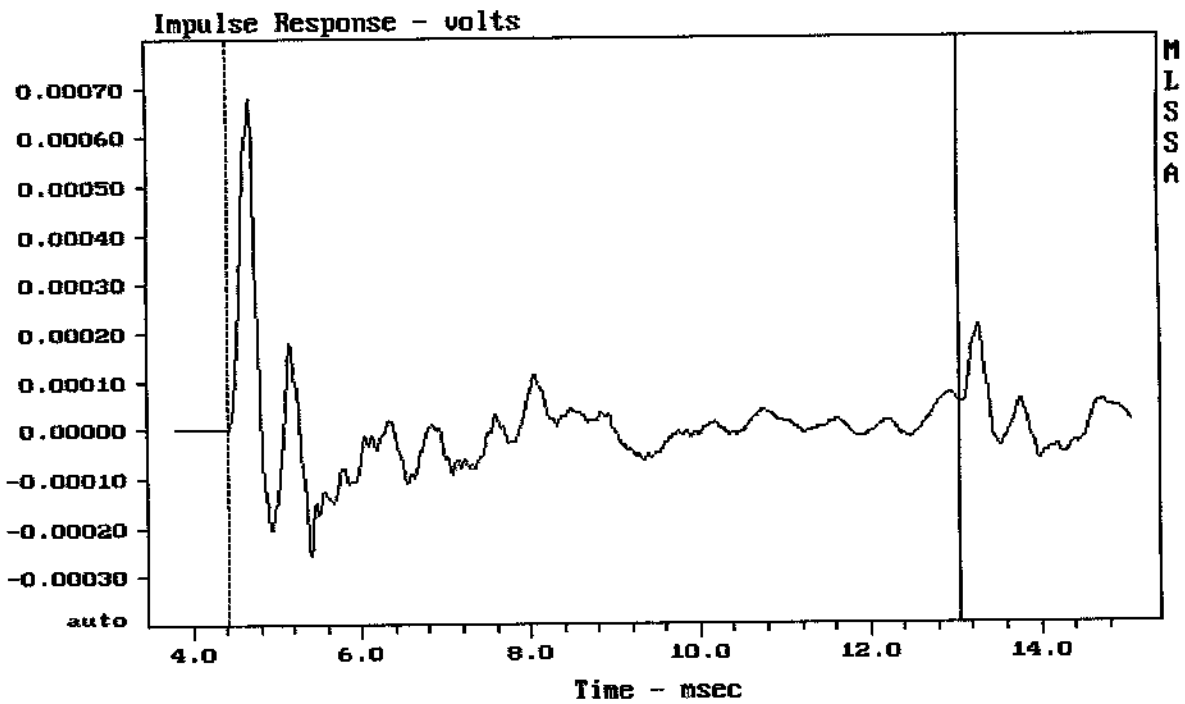

mean: -1.962e-006, rms: 0.0001031, std: 0.0001031, max: 0.0006799, min: -0.000

EMINENCE KILOMAX PRO 15

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.67	Ohms
2	Fs	41.75	Hz
3	Re	5.12	Ohms[dc]
4	Res	129.75	Ohms
5	Qms	11.30	
6	Qes	0.45	
7	Qts	0.43	
8	L1	1.48	mH
9	L2	2.20	mH
10	R2	7.95	Ohms
11	RMSE-load	0.91	Ohms
12	Vas(Sd)	168.40	liters
13	Mms	88.67	grams
14	Cms	164	μ M/Newton
15	B1	16.34	Tesla-M
16	SPLref(Sd)	96.2	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.15 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -25.6% (-20% to -50% is recommended).

EMINENCE KILOMAX PRO 15

MLSSA: Parameters

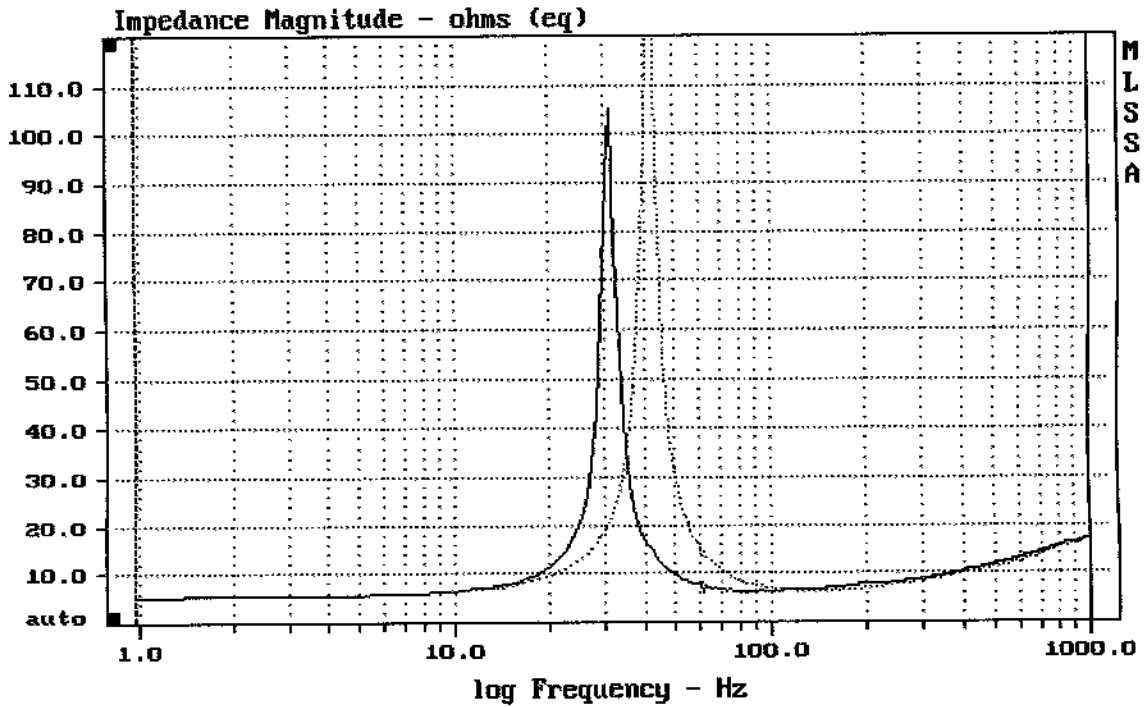

mean: 12.62, rms: 15.47, std: 8.946, max: 134.4, min: 5.214

MLSSA: Frequency Domain