

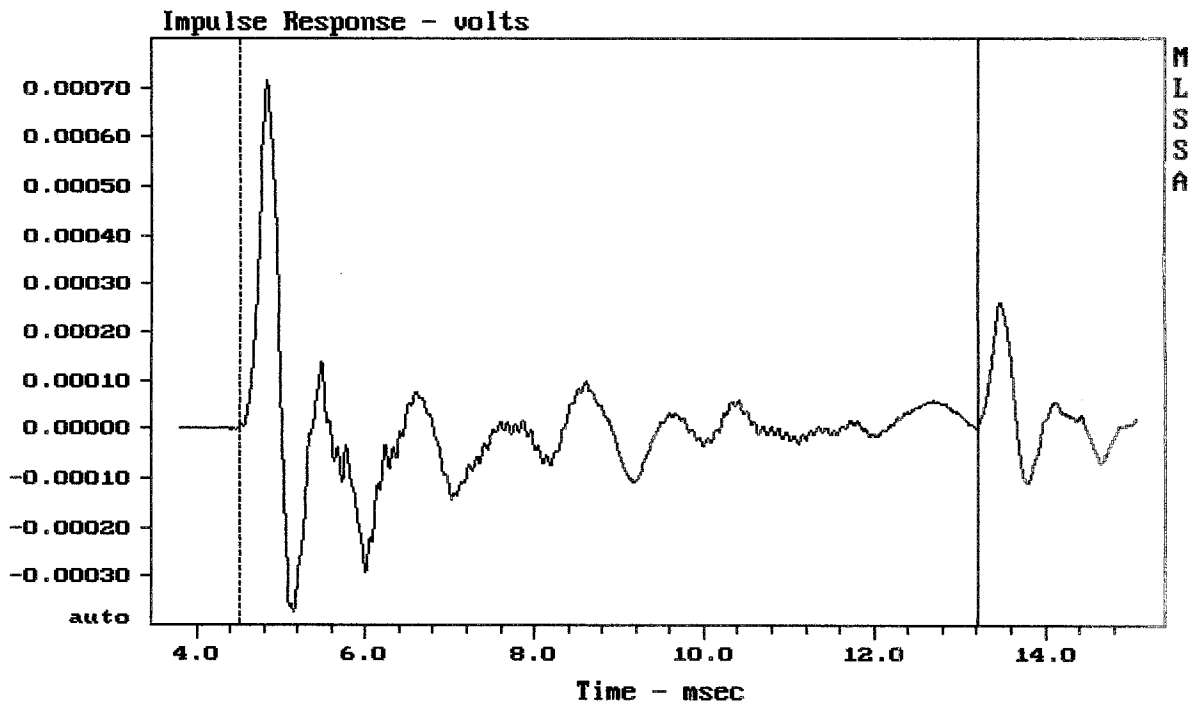

---

Level (55:2308 Hz) = 93.34 dB SPL/watt (8 ohms, @1.50 meters)

---

EMINENCE KILOMAX PRO 18

MLSSA: Frequency Domain




---

mean: -1.856e-006, rms: 0.0001243, std: 0.0001243, max: 0.0007131, min: -0.000

---

EMINENCE KILOMAX PRO 18

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.15	Ohms
2	Fs	35.09	Hz
3	Re	5.10	Ohms[dc]
4	Res	128.50	Ohms
5	Qms	14.65	
6	Qes	0.58	
7	Qts	0.56	
8	L1	1.17	mH
9	L2	2.02	mH
10	R2	11.80	Ohms
11	RMSE-load	0.76	Ohms
12	Vas(Sd)	261.83	liters
13	Mms	149.54	grams
14	Cms	138	$\mu\text{M}/\text{Newton}$
15	B1	17.01	Tesla-M
16	SPLref(Sd)	94.7	dB[Re]
17	Rub-index	0.02	

Method: Mass-loaded (120.00 grams)

Area (Sd): 1164.16 sq cm

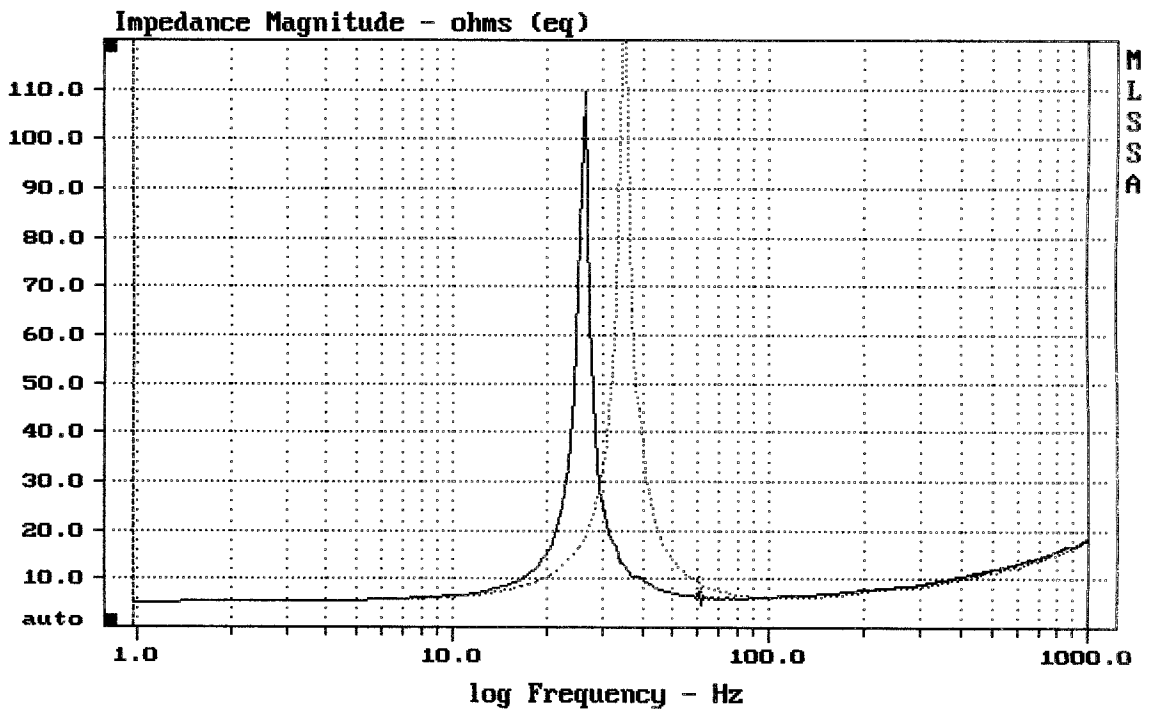
DCR mode: Measure (-0.15 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -25.6% (-20% to -50% is recommended).

EMINENCE KILOMAX PRO 18

MLSSA: Parameters



mean: 12.37, rms: 14.46, std: 7.488, max: 136.1, min: 5.205

EMINENCE KILOMAX PRO 18

MLSSA: Frequency Domain