


Level (44:799 Hz) = 85.37 dB SPL/watt (6 ohms, @1.50 meters)

EMINENCE LAB15

MLSSA: Frequency Domain

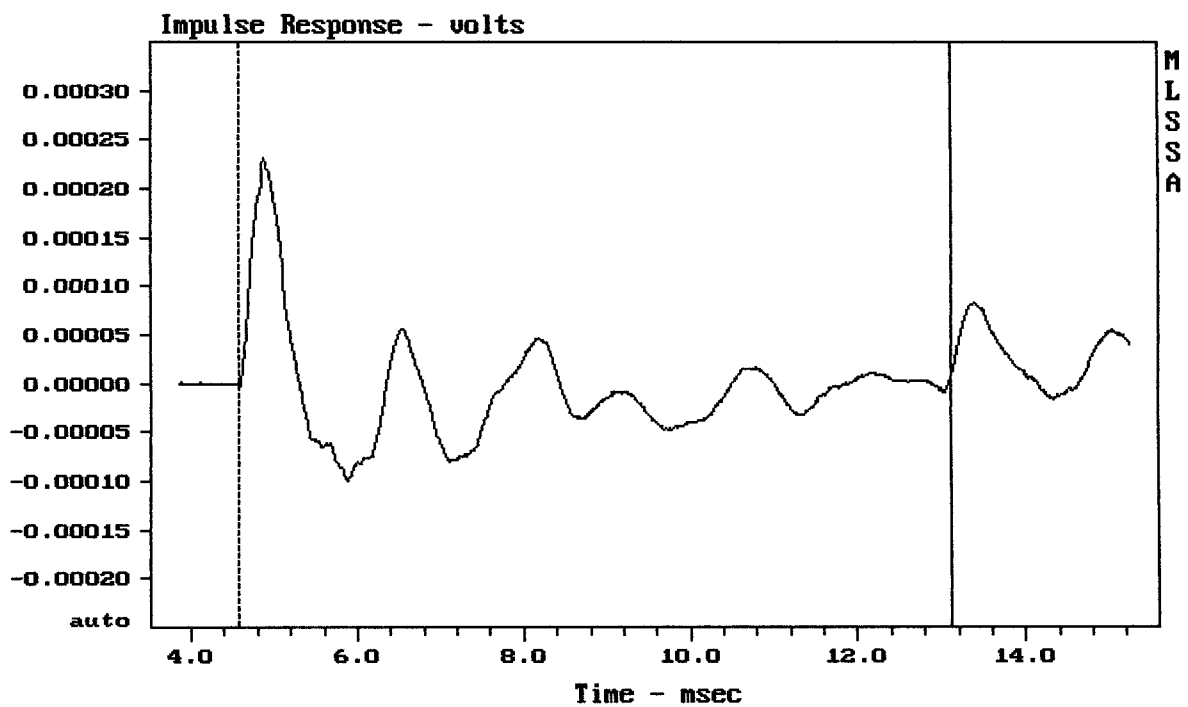

mean: -6.614e-006, rms: 5.504e-005, std: 5.464e-005, max: 0.0002312, min: -9.9

EMINENCE LAB15

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.59	Ohms
2	Fs	28.85	Hz
3	Re	4.94	Ohms[dc]
4	Res	121.98	Ohms
5	Qms	8.87	
6	Qes	0.36	
7	Qts	0.35	
8	L1	3.17	mH
9	L2	5.67	mH
10	R2	21.95	Ohms
11	RMSE-load	1.67	Ohms
12	Vas(Sd)	102.21	liters
13	Mms	287.80	grams
14	Cms	106	$\mu\text{M}/\text{Newton}$
15	B1	26.78	Tesla-M
16	SPLref(Sd)	90.2	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (160.00 grams)

Area (Sd): 829.58 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -21.5% (-20% to -50% is recommended).

EMINENCE LAB 15

MLSSA: Parameters

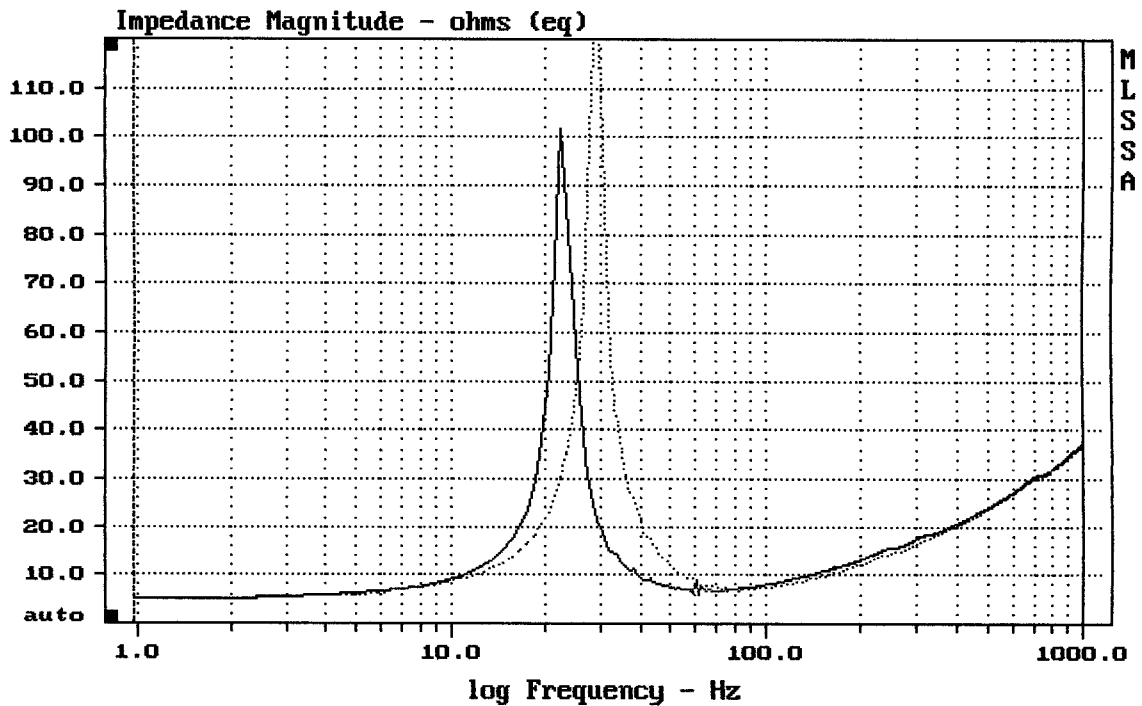

mean: 23.57, rms: 25.93, std: 10.81, max: 127, min: 5.054

MLSSA: Frequency Domain