


Level (100:3007 Hz) = 96.20 dB SPL/watt (4 ohms, @1.50 meters)

EMINENCE LEGEND CA15C

MLSSA: Frequency Domain

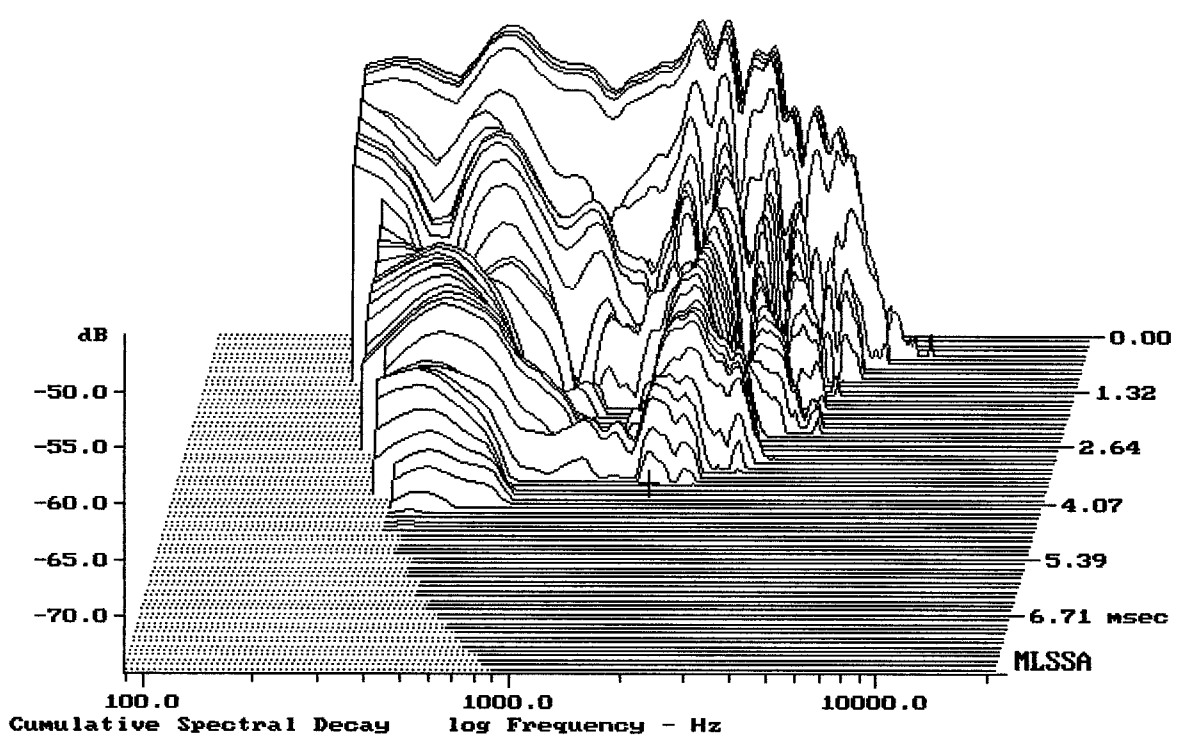

-74.81 dB, 1731 Hz (39), 3.630 msec (34)

DTTO

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.13	Ohms
2	Fs	50.81	Hz
3	Re	2.89	Ohms[dc]
4	Res	22.05	Ohms
5	Qms	4.17	
6	Qes	0.55	
7	Qts	0.48	
8	L1	0.62	mH
9	L2	0.91	mH
10	R2	3.03	Ohms
11	RMSE-load	0.25	Ohms
12	Vas(Sd)	155.41	liters
13	Mms	64.88	grams
14	Cms	151	$\mu\text{M}/\text{Newton}$
15	B1	10.46	Tesla-M
16	SPLref(Sd)	97.5	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 855.30 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -32.3% (-20% to -50% is recommended).

EMINENCE LEGEND CA15C

MLSSA: Parameter

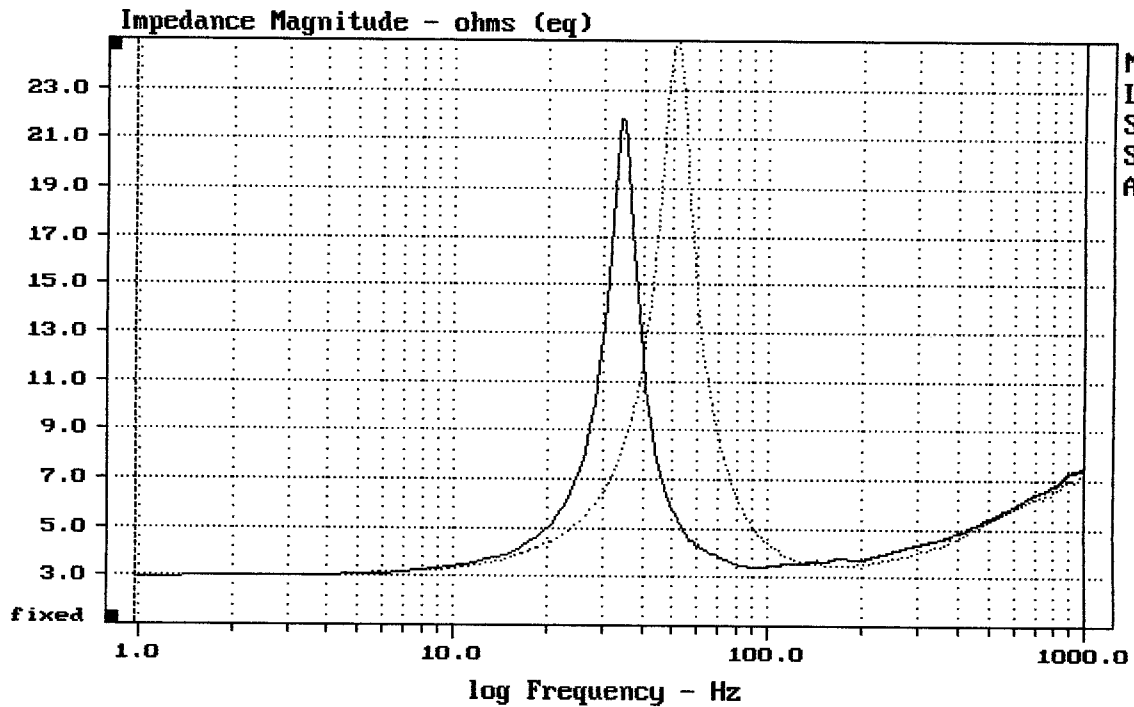

mean: 5.731, rms: 6.231, std: 2.447, max: 25.05, min: 2.938

MLSSA: Frequency Domain