

MLSSA SPO 4.0D #960903-3057-3075

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	1.01	Ohms
2	Fs	26.19	Hz
3	Re	6.47	Ohms[dc]
4	Res	169.50	Ohms
5	Qms	8.18	
6	Qes	0.31	
7	Qts	0.30	
8	L1	1.24	mH
9	L2	2.29	mH
10	R2	11.64	Ohms
11	RMSE-load	0.96	Ohms
12	Vas(Sd)	613.45	liters
13	Mms	108.72	grams
14	Cms	340	$\mu\text{M}/\text{Newton}$
15	B1	19.26	Tesla-M
16	SPLref(Sd)	97.3	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (80.00 grams)

Area (Sd): 1134.11 sq cm


DCR mode: Measure (-0.07 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -21.8% (-20% to -50% is recommended).

EMINENCE SIGMA PRO-18A


MLSSA: Parameters

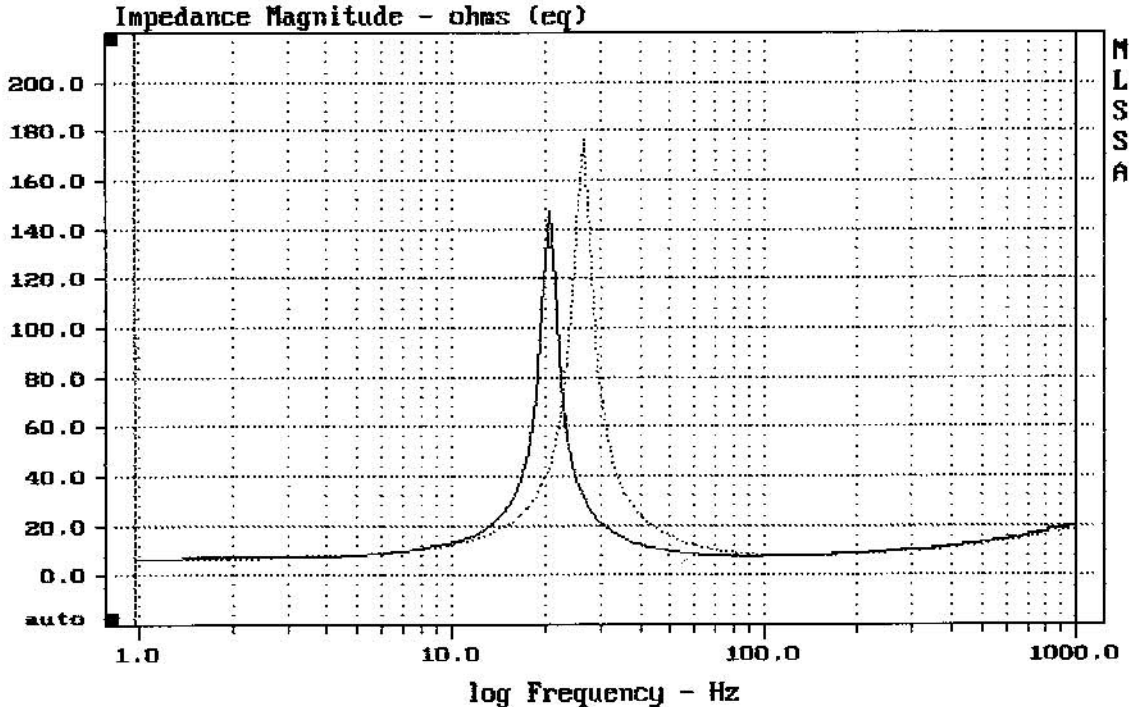

CURSOR: dy = -1.16687 x = 1000.9766 (1025)

DTTO


MLSSA: Frequency Domain

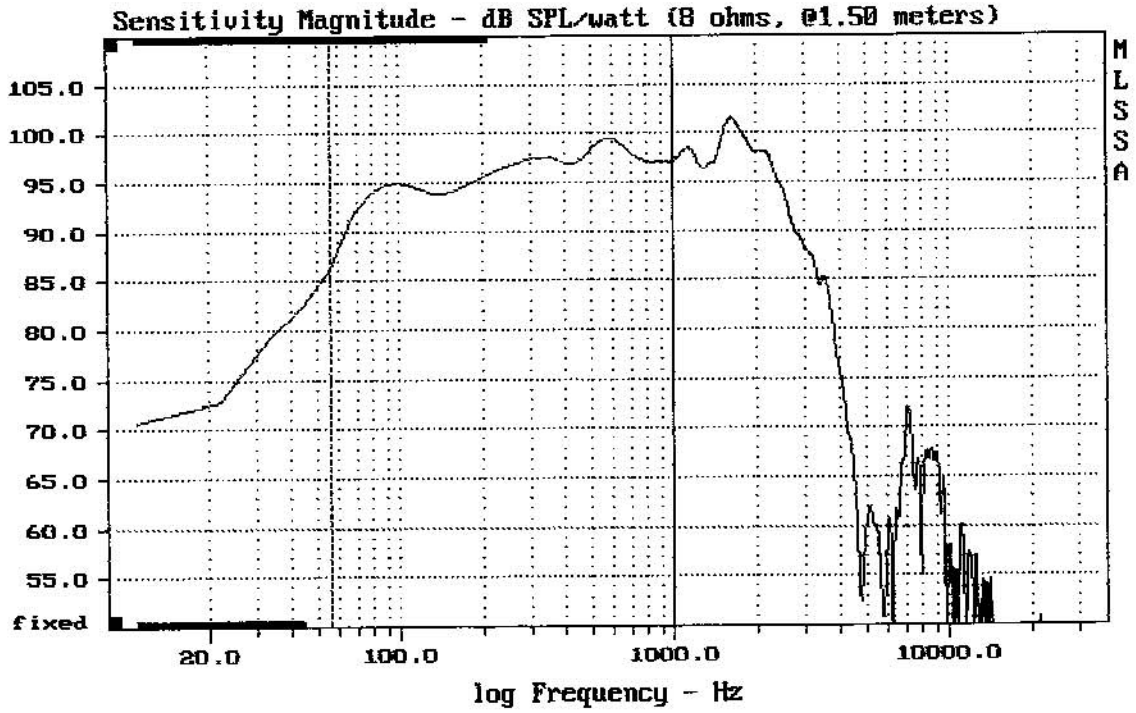

Level (55:999 Hz) = 96.17 dB SPL/watt (8 ohms, @1.50 meters)

EMINENCE SIGMA PRO-18A

MLSSA: Frequency Domain

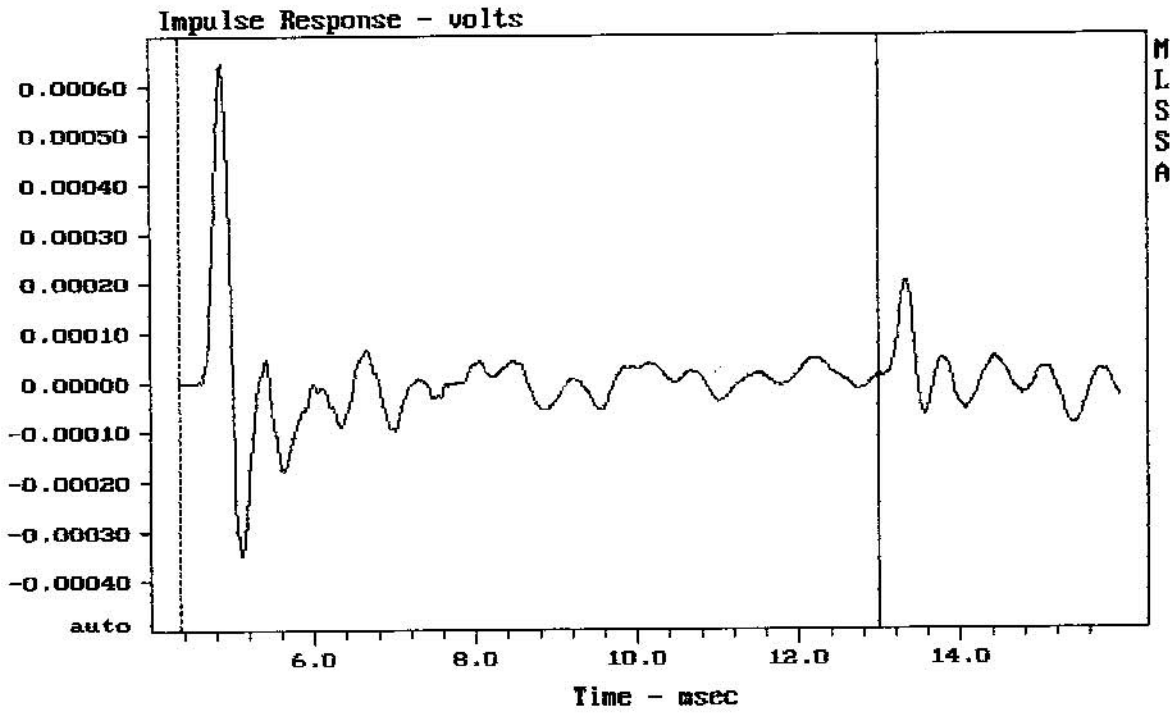

CURSOR: y = 1.28201e-005 x = 12.9910 (1181)

EMINENCE SIGMA PRO-18A