


Level (799:14005 Hz) = 105.22 dB SPL/watt (8 ohms, @1.00 meters)


FANE CD140S + BC-5

MLSSA: Frequency Domain

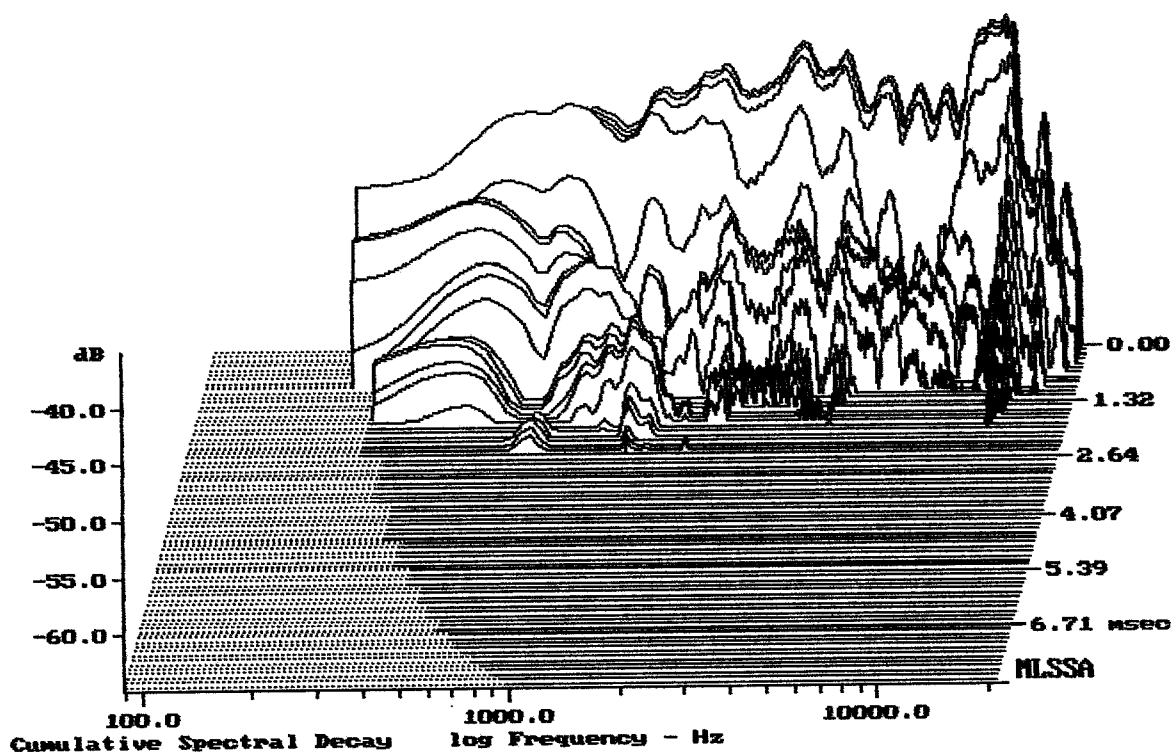

-64.17 dB, 1376 Hz (31), 2.428 msec (23)


DTTO

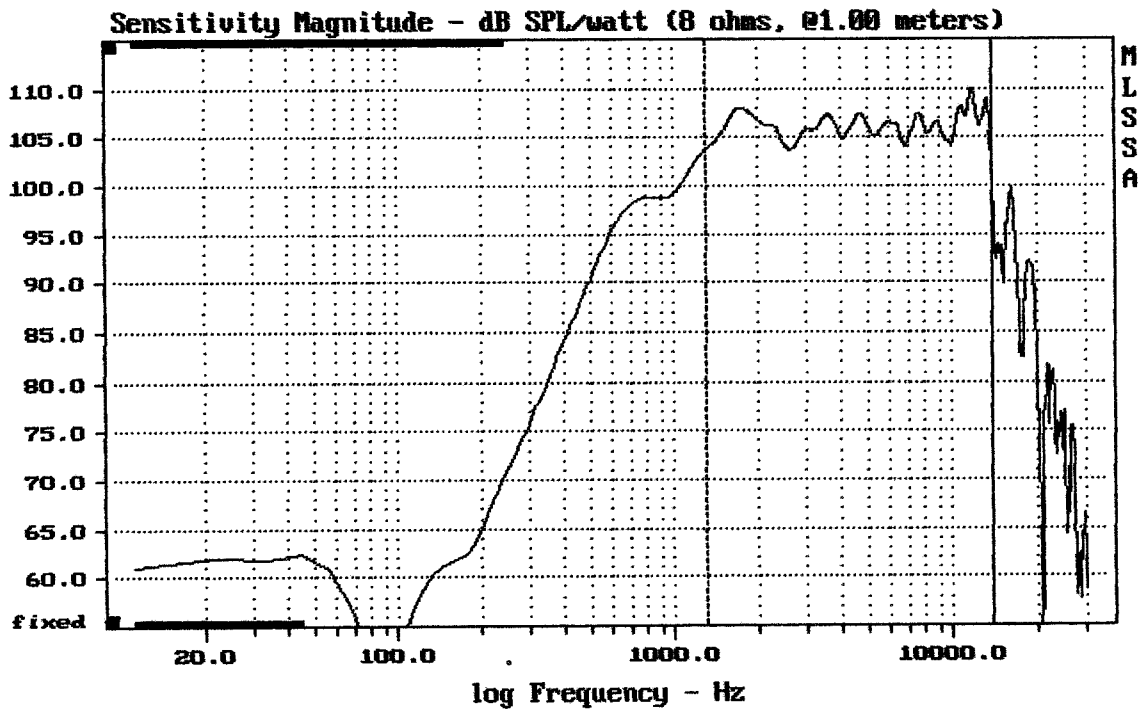

Level (1298:1485 Hz) = 106.32 dB SPL/watt (8 ohms, @1.00 meters)


FANE CD148S + HM25-25

MLSSA: Frequency Domain

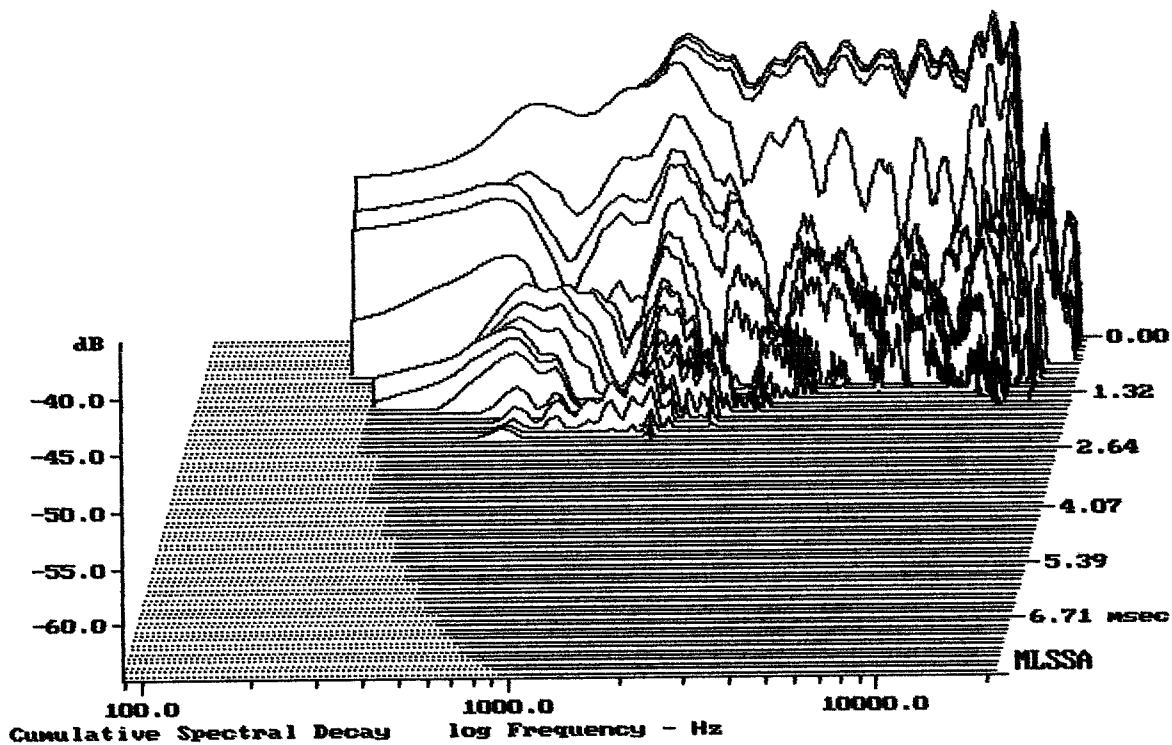

-64.05 dB, 1598 Hz (36), 2.310 msec (22)

DTTO

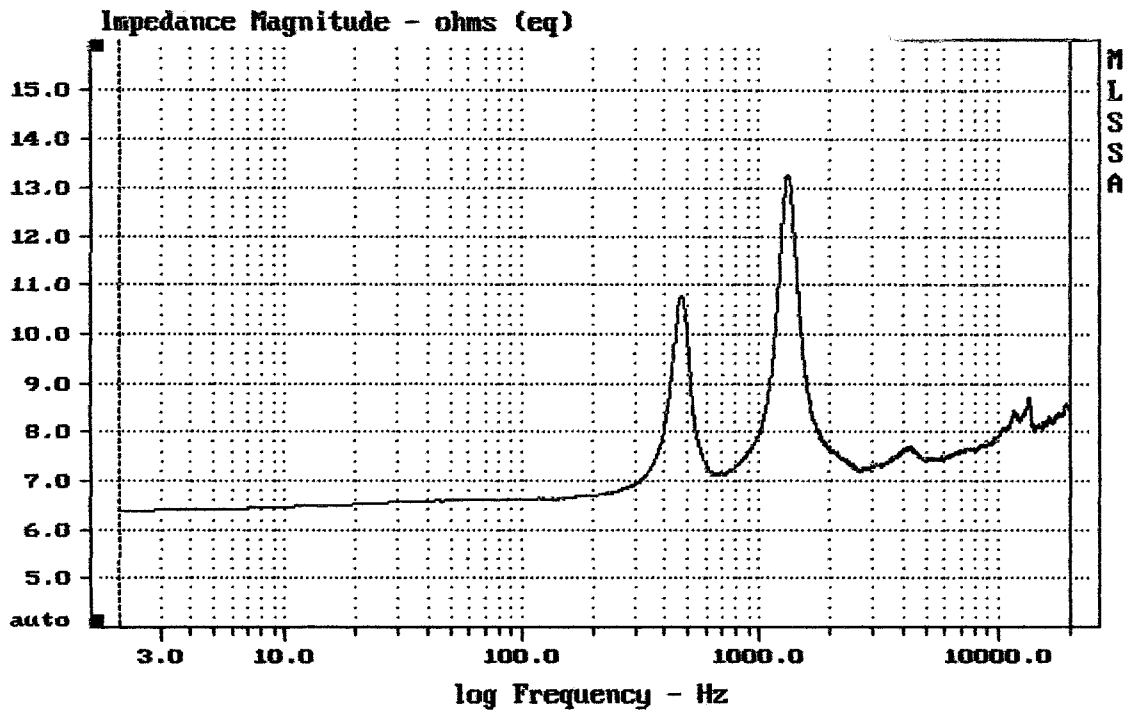



---

mean: 8.012, rms: 8.042, std: 0.7001, max: 13.27, min: 6.367

---

CD140S + HM25-25

MLSSA: Frequency Domain

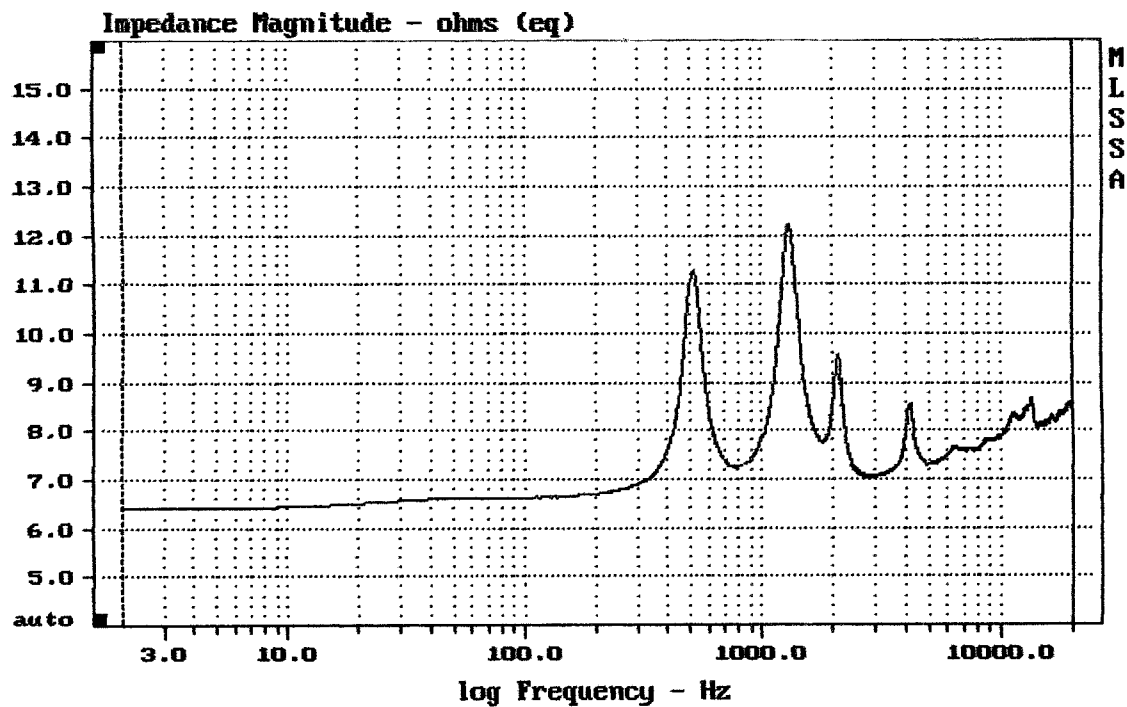


---

mean: 8.02, rms: 8.046, std: 0.6509, max: 12.22, min: 6.406

---

CD140S

MLSSA: Frequency Domain